



LOC RWY 19

511236N 0583927W VAR 19°W

		UNICOM – 123.5 (AU)				ARCAL 123.5(K)
				ATF*		(P2) 2. .
SAFE ALT 100 NM 4400		LOC IIF 108.7	APCH CRS 190°	MIN ALT OBRAT 1400	LDA 4595	

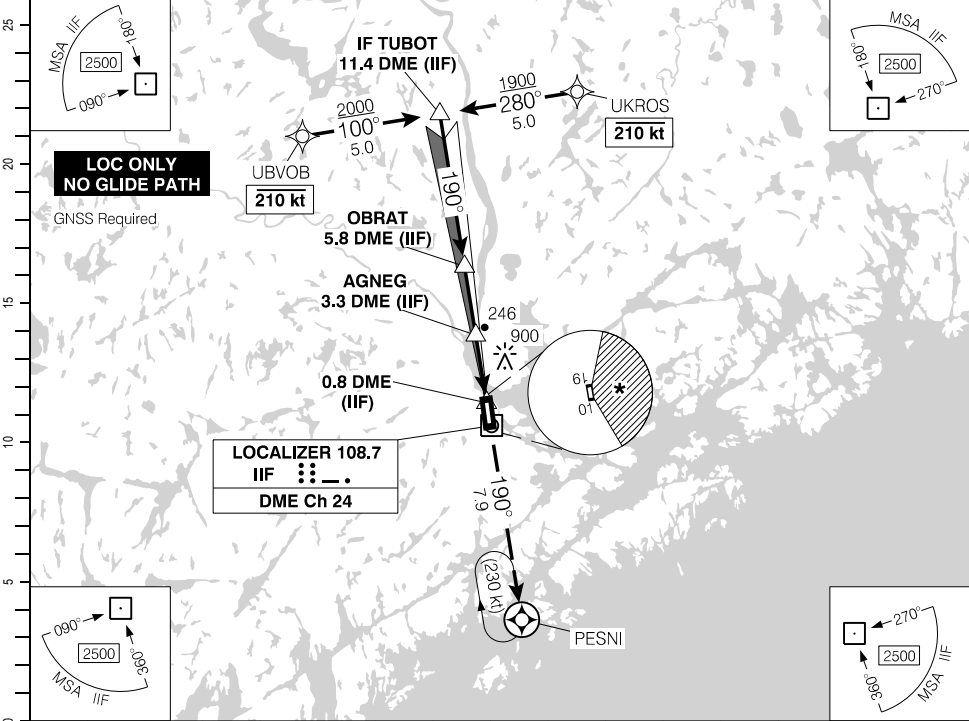

		11.4	10	9	8	6.9	6	5	4	3	2.1		DIST FROM DME (IIF)
		3410	2980	2660	2340	2000	1710	1390	1070	750	480		ALT (3.00° APCH PATH)

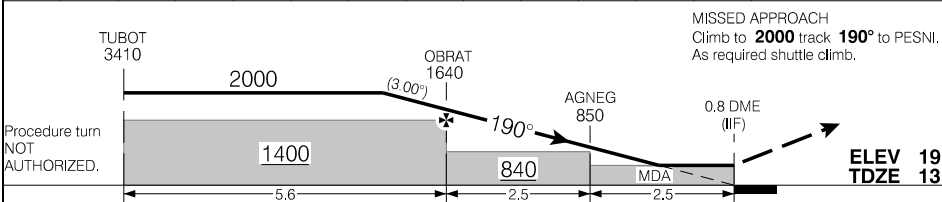

RASS: When using CYBX add 150°. When using CYHR add 140°.		CATEGORY	A	B	C	D
		LOC	480	(467)	1½	
		CIRCLING	* 700 (681) 1½	* 720 (701) 1½	* 880 (861) 2½	* 880 (861) 2½
Knots		ft/min	Min:Sec			
70		370				
90		480				
110		580				
130		690				
150		800				

LOC RWY 19

EFF 20 FEB 25

CYIF