


RNAV (GNSS) RWY 14

613519N 0715546W VAR 22°W

CYKG

		APRT RADIO – 122.1 TFC – 122.1				ARCAL 122.1 (J)
SAFE ALT 100 NM 3900		WAAS Ch 80367 W14A	APCH CRS 143°	MIN ALT KEGTI 2500	LDA 3520	AS . .

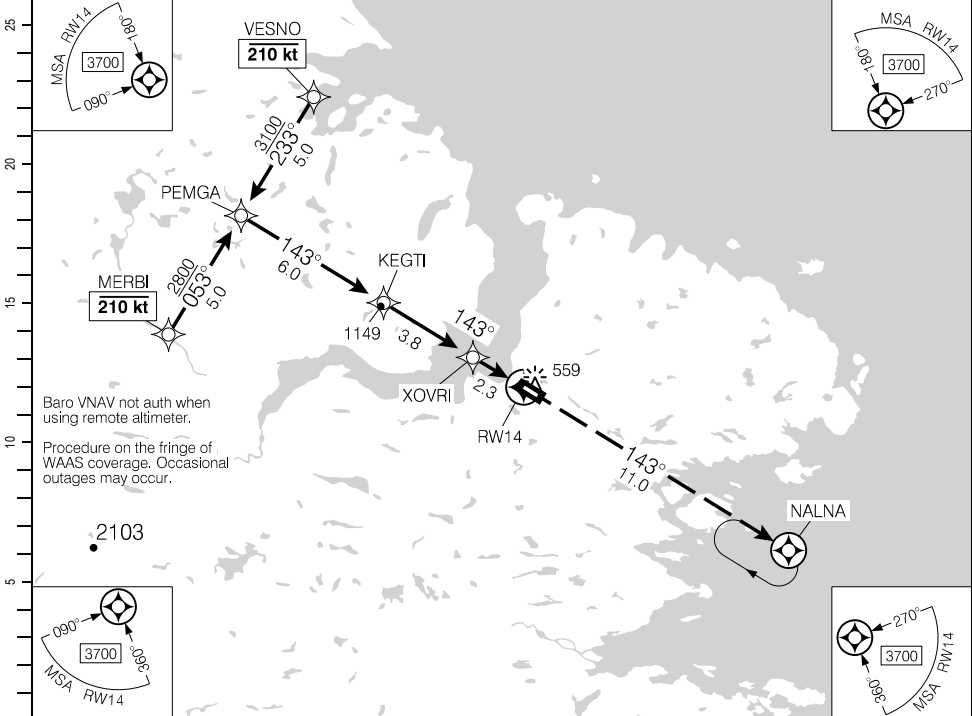

12.1	11	10	9	7.9	7	6	5	4	3	1.5	DIST FROM RW14		
4410	4070	3750	3440	3100	2800	2480	2160	1840	1520	1060	ALT (3.00° APCH PATH)		
PEMGA IAWP/IWP 4410												MISSED APPROACH Climb to 3700 track 143° to NALNA. As required shuttle climb. 3100 2500 1260 (LNAV only) MDA 3.00° 143° 6.0 3.8 2.3 3.00° ELEV 517 TDZE 517	
KEGTI FAWP 2500 XOVRI SDWP 1300 RW14 MAWP													
RASS: ● When using CYHA add 230'.				CATEGORY		A		B		C		D	
				LPV		767		(250)		1			
Knots				ft/min		Min:Sec		LNAV/VNAV (min. -19°C, max. 54°C)		1115		(598) 2	
70				370									
90				480				LNAV		1060		(543) 1¼	
110				580									
130				690									
150				800									

RNAV (GNSS) RWY 14

CYKG

EFF 7 AUG 25

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved