

CYLW / YLW
KELOWNA



MVD
(B737-NG)

10-3Y
10 JAN 24
EFF: 21 MAR 24

WESTJET

KELOWNA, BC
KATOL THREE DEPARTURE

GE PROPRIETARY INFORMATION

Apt Elev 1420'	Trans ALT 18000'	VANCOUVER Centre 133.5	SPECIAL AIRCREW AUTHORIZATION REQUIRED				
KATOL THREE ENDBY TRANSITION RNAV (RNP) DEPARTURE RNP 0.30 (KATOL3.KATOL) RWY 16		Requires weather minima of 1/4 mile visibility.					
		This departure requires a minimum climb gradient of 545' per NM to 4400'.					
		For a climb rate of 545' per NM					
		Gnd speed (kts)	100	150	200	250	300
		Climb (ft/min)	908	1362	1817	2271	2725


TAKE-OFF: NADP 1 REQUIRED

RWY 16: Climb to 9000' via the RNAV (RNP) departure track crossing KATOL at or above 3400'.
Thence:

TRANSITIONS:

ENDBY (KATOL3.ENDBY): Fly the RNAV (RNP) track to ENDBY. EO Branch Point is KATOL. Do not exceed 290 kts groundspeed until turn is complete at LW690.

Contact Vancouver Centre after passing 4000 feet.

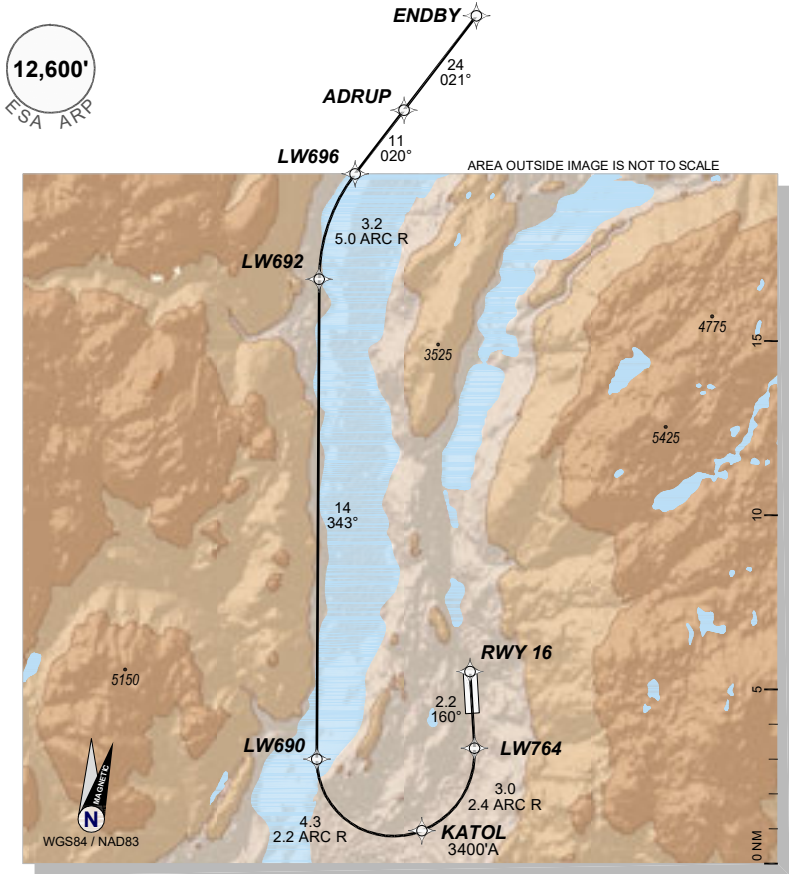


RNAV (RNP) ENGINE FAILURE
RWY 16

For engine failure prior to EO Branch Point:

- EXECute ENG OUT SID MOD
Climb and maintain 7000'.
- Fly RNAV (RNP) track to LW827.
- Hold as published. Maximum holding speed 230 KIAS.

For engine failure after EO Branch Point:

- Continue on present RNAV (RNP) departure track to transition.

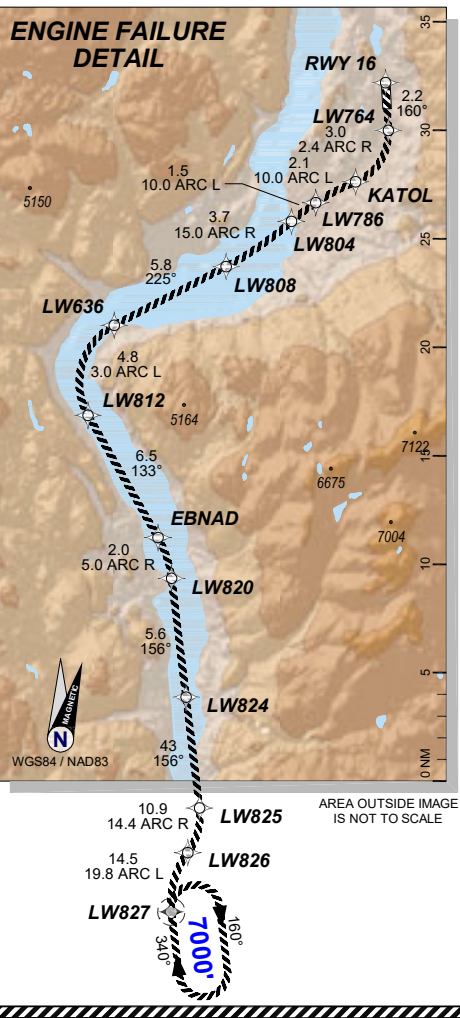

REQUIRED EQUIPMENT:

- EGPWS
- (2) FMCS
- (2) IRS in NAV Mode
- (2) PFD/ND Displays
- (2) GPS
- (2) Flight Director Displays in LNAV
- (1) Radio Altimeter operating with associated Flight Director

SET-UP:

Set TERR
Fix page 1 EO Branch Point (KATOL).

LOST COMMUNICATIONS:

Maintain 9000' or last assigned altitude for 5 minutes prior to climbing to filed cruise altitude.