


RNAV (GNSS) RWY 05

● ATIS – 125.67	TML Toronto – 133.4	● TWR – 120.1	● GND – 118.4	ARCAL 120.1(K) P1 2 .
● MET – 125.67		● TFC – 120.1	● MF	
SAFE ALT 100 NM 4900	WAAS Ch 80643 W05A	APCH CRS 046°	MIN ALT ALIXO 2100	LDA 2654

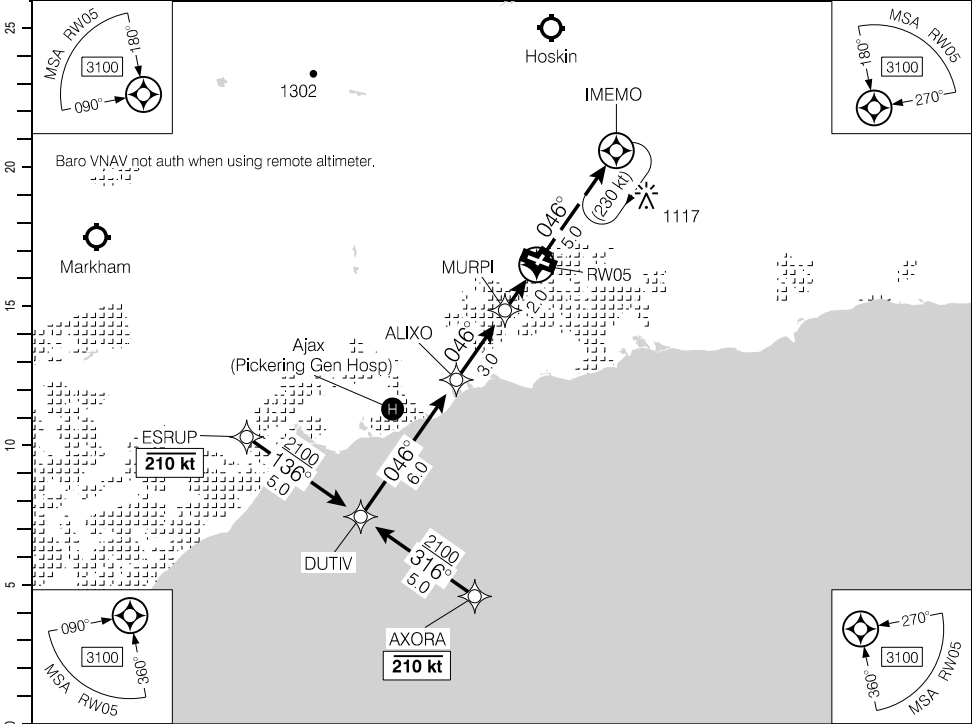

	11	10	9	8	7	6	5.0	4	3	2	1.1	DIST FROM RW05
(NM)	4010	3680	3360	3040	2720	2400	2100	1770	1450	1130	840	ALT (3.00° APCH PATH)
DUTIV IAWP/IWP 4010												
ALIXO FAWP 2100												
MURPI SDWP 1130												
RW05 MAWP												
MISSED APPROACH Climb to 3000 track 046° to IMEMO. As required shuttle climb.												
ELEV 460 TDZE 447												

RASS: When using CYYZ add 100'.			CATEGORY	A	B	C	D
			LPV	694	(250)		1
			LNAV/VNAV (min. -20°C, max. 54°C)	732	(288)		1
			LNAV	840	(396)		1¼
Knots	ft/min	Min:Sec					
70	380						
90	480						
110	590						
130	690						
150	800						

RNAV (GNSS) RWY 05