


ATIS – 120.2		ARR – 119.5		TWR – 118.3		GND – 121.9		TDZL
SAFE ALT 100 NM 3800		WAAS Ch 80656 W36A		APCH CRS 005°		MIN ALT VITIL 2100		LDA 11000

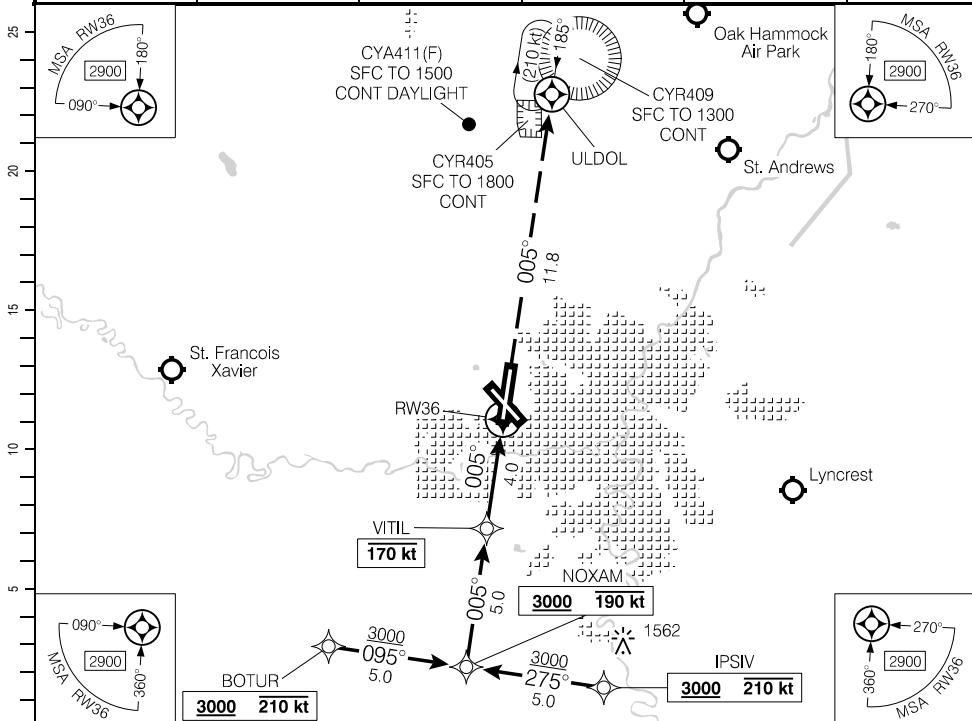

		9	8	6	5	4	3	2	1.1		DIST FROM RW36
		3710	3390	3000	2750	2430	2100	1790	1470	1200	ALT (3.00° APCH PATH)

NOXAM IWP 3710

3.00°

3000

VITIL FAWP 2100

2100

0.05°

MDA

RW36 MAWP

TCH 60'

ELEV 784

TDZE 778

			CATEGORY	A	B	C	D
			LPV	977	(200)	½ RVR 26	
Knots	ft/min	Min:Sec	LNAV/VNAV (min. -18°C, max. 54°C)	1053	(276)	1 RVR 50	
70	370		LNAV	1200	(423)	1 RVR 50	
90	480						
110	580						
130	690						
150	800						

CYWG