




AERODROME CHART

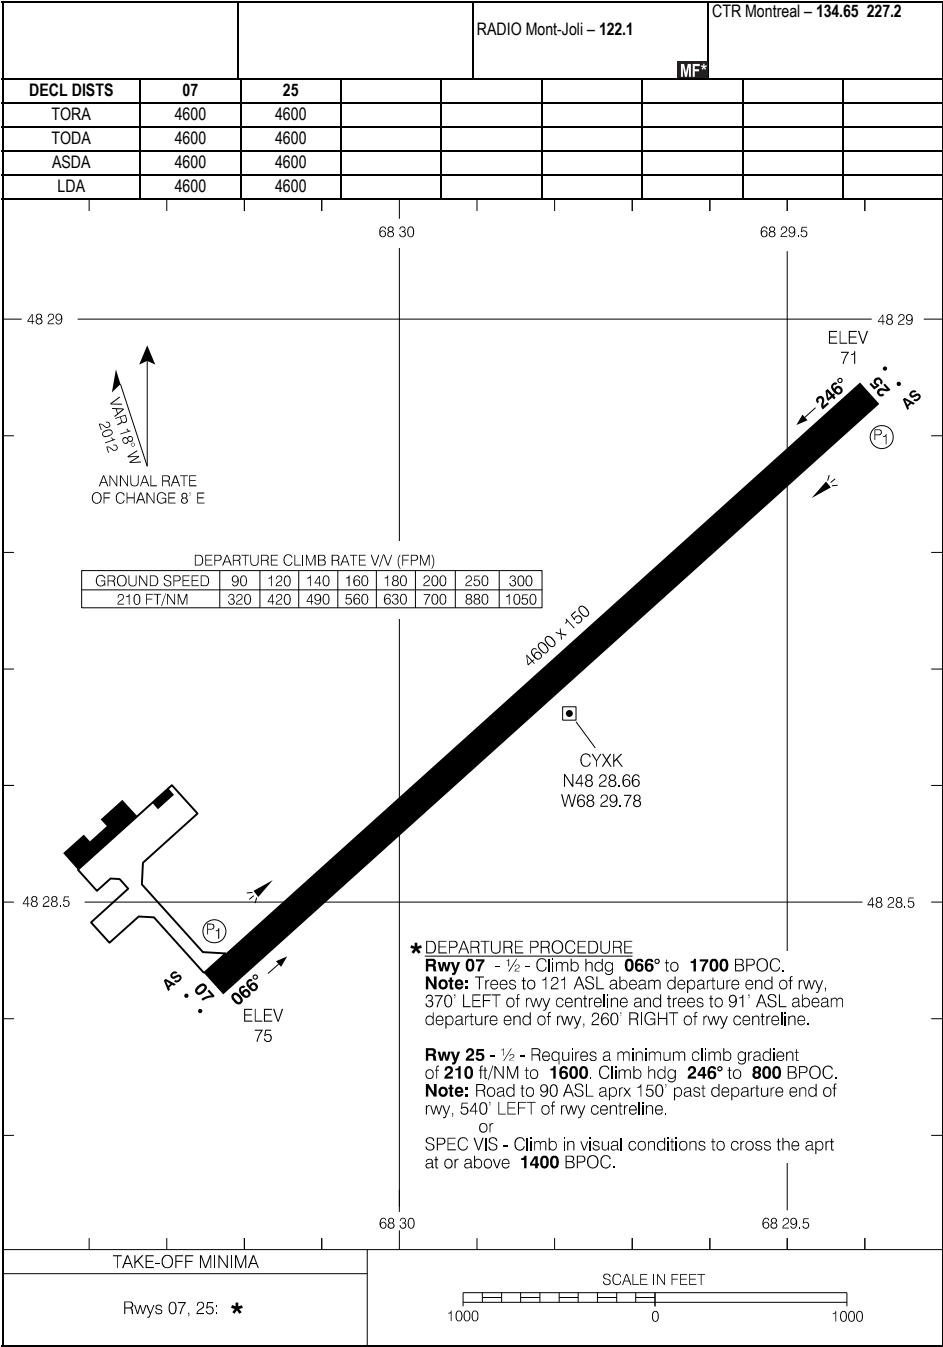

68 30

68 29.5

48 29

48 28.5

ANR 18 NM
2012

ANNUAL RATE
OF CHANGE 8 E

DEPARTURE CLIMB RATE V/V (FPM)

GROUND SPEED	90	120	140	160	180	200	250	300
210 FT/NM	320	420	490	560	630	700	880	1050

4600 x 150

CYXK
N48 28.66
W68 29.78

48 29
ELEV
71
AS
P1

48 28.5
AS
P1
066°
ELEV
75

* DEPARTURE PROCEDURE

Rwy 07 - ½ - Climb hdg 066° to 1700 BPOC.

Note: Trees to 121 ASL abeam departure end of rwy, 370' LEFT of rwy centreline and trees to 91' ASL abeam departure end of rwy, 260' RIGHT of rwy centreline.

Rwy 25 - ½ - Requires a minimum climb gradient of 210 ft/NM to 1600. Climb hdg 246° to 800 BPOC.

Note: Road to 90 ASL aprx 150' past departure end of rwy, 540' LEFT of rwy centreline.

or

SPEC VIS - Climb in visual conditions to cross the aprt at or above 1400 BPOC.

TAKE-OFF MINIMA

Rwys 07, 25: *

SCALE IN FEET

1000 0 1000

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

