

CYXX / YXX
ABBOTSFORDMVD
(B737-NG)19-3
20 JUN 23
EFF: 5 OCT 23

WESTJET

ABBOTSFORD, BC
RNAV (RNP) X RWY 25

*ATIS 119.8	VICTORIA Terminal Control 132.7	*ABBOTSFORD Tower OUTER 121.0	INNER 119.4	ABBOTSFORD Ground 121.8	CRANBROOK Radio MF 119.4 when Twr inop
RNAV (RNP) RNVX 25	FMS Rwy Heading 249°	Apt Elev. 194' TDZE 194'	PIGDO (IF) 6500'A	XX950 (FAF) 2740' (3.00°)	Trans Level FL180

① VNAV Path must be annunciated beyond this point.

ROUTING: HOPE ARRIVAL to RNVX 25As early as possible prior to descent, set **210B/7000'** hard altitude at **TASDI****Approach clearance not received prior to TASDI:**Fly RNAV STAR via **OMINO(DTW)**. Expect **RADAR** vectors to final for **RW07**.**Approach clearance RECEIVED prior to TASDI:**Set and fly **TASDI** direct **PIGDO** then, fly the **RNVX 25** approach.SPECIAL AIRCREW
AUTHORIZATION REQUIRED**MISSED APPROACH:**Climb to **2000'** via the RNAV (RNP) Missed Approach track to **LENEV**.
Hold **LENEV**. Maximum holding speed **230 KIAS**.**ENGINE OUT MISSED APPROACH:**If unable to cross **LENEV** at **2000**, advise ATC, and climb to **3200'** via the RNAV (RNP) Engine Out Missed Approach track to **XX500** and hold as published. Maximum holding speed **230 KIAS**.**APPROACH:**



- Verify GPS predictions provide the necessary ANP requirements for the approach
- Alt Set: INCHES
- Approach not authorized when airport temperature below -11 degrees C or above 40 degrees C.
- Approach not authorized using remote altimeter setting

REQUIRED EQUIPMENT:

- EGPWS (Set TERR)
- (2) FMCS
- (2) GPS
- (2) IRS in NAV Mode
- (2) PFD/ND Displays
- (2) Flight Director Displays
- (1) A/P Channel in LNAV/VNAV
- (1) Radio Altimeter operating with associated Flight Director

FMS:

- DME/DME off
- RNP lateral (as required)
- RNP vertical 125'
- Enter wind correction

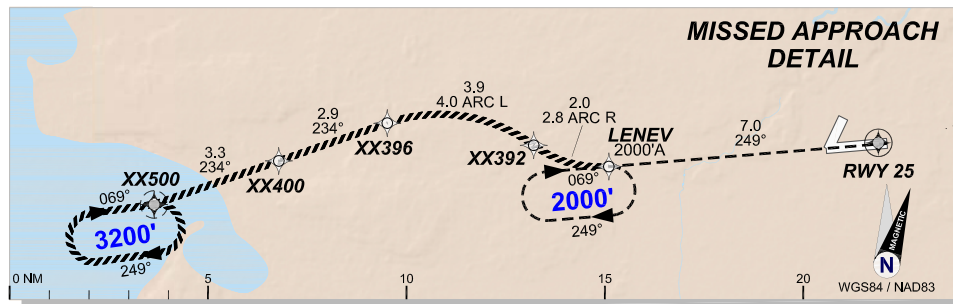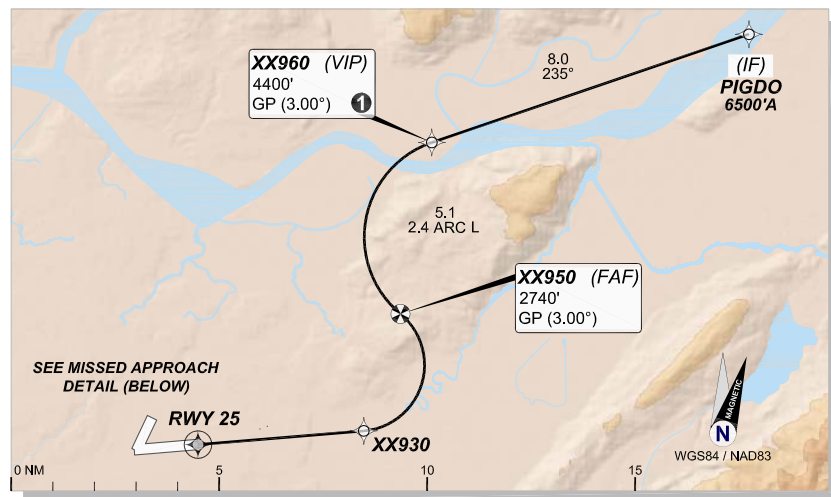

RNP 0.10	RNP 0.15	RNP 0.20	RNP 0.30	
DA(H) 590' (396')	DA(H) 598' (404')	DA(H) 607' (413')	DA(H) 609' (415')	
C D 1 1/4	C D 1 1/4	C D 1 1/4	C D 1 1/4	