


RNAV (GNSS) Z RWY 35L

510650N 1140113W VAR 15°E

ATIS – 128.22	ARR – 126.52 (W) 125.9 (E) 123.85 127.15	TWR – 118.4 (W) 118.7 (E) 236.6	GND – 121.9 (W) 125.35 (E) 275.8	TDZL
SAFE ALT 100 NM 13,800	WAAS Ch 80359 W35A	APCH CRS 345°	MIN ALT REVIG 5200	LDA 12675

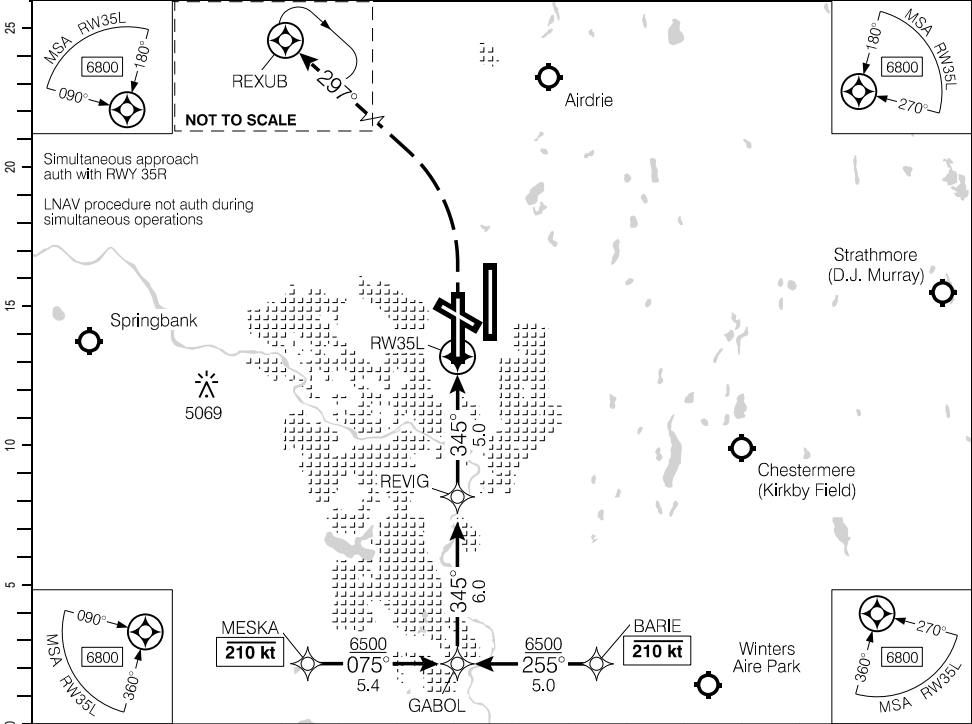

DIST FROM RW35L		1.5	2	3	4	5	6	7	8	9.1	10	11		
ALT (3.00° APCH PATH)		4060	4230	4550	4870	5200	5510	5820	6140	6500	6780	7110		
MISSED APPROACH Climb to 4100 hdg 345°. Then climbing LEFT turn to 7000 direct to REXUB. ELEV 3606 TDZE 3542 RW35L MAWP TCH 53' MDA REVIG FAWP 5200 GABOL IWP 7110 345° 3.00°														
		CATEGORY	A		B		C		D					
		LPV	3742		(200)		½ RVR 26							
		LNAV/VNAV (min. -25°C, max. 51°C)	3958		(416)		1 RVR 50							
		LNAV	4060		(518)		1 RVR 50							
Knots	ft/min	Min:Sec												
70	370													
90	480													
110	580													
130	690													
150	800													

RNAV (GNSS) Z RWY 35L

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved