

ILS PRM RWY 15L

ATIS – 120.82	ARR – 132.8 124.47 125.4 134.17	TWR – 118.35 118.7	GND – 121.9 121.65 119.1	
SAFE ALT 100 NM 4900	LOC IRW 110.5	APCH CRS 147°	GP WOHIL 1820	
PRM – 133.1				
LDA 10886				

RADAR Required.
VGSi and ILS GP not coincident
(VGSi Angle 3.0° / TCH 78ft).



Low TCH. Act with Eye-to-Wheel Height 22 ft or greater
exercise caution due to reduced wheel clearance over
THLD. Descent on ILS GP will indicate LOW on PAPI,
HUD flightpath indications may terminate short of
aiming marker.

Procedure NA when glideslope not available

SEE ADDITIONAL REQUIREMENTS ON AAUP

USE OF FD OR AP REQUIRED DURING
SIMULTANEOUS OPERATIONS

Simultaneous approach auth with RWY 15R

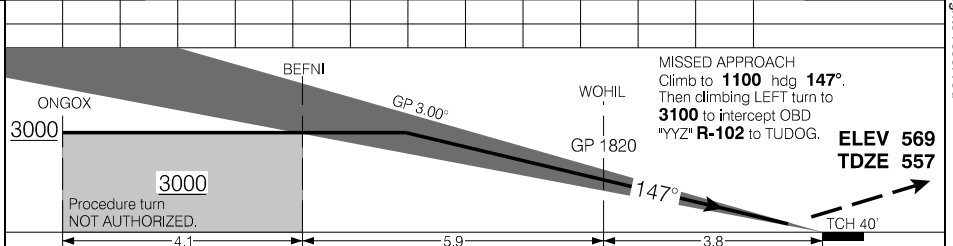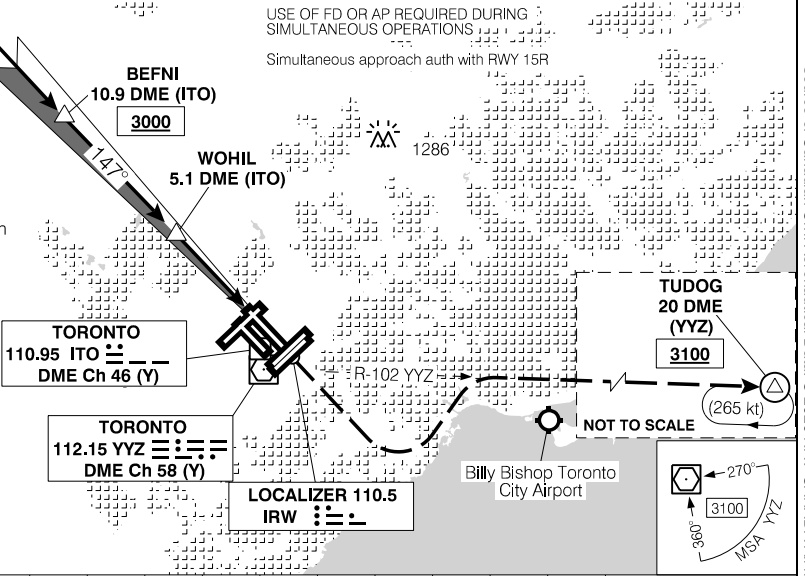

CATEGORY		A	B	C	D
ILS		757	(200)	½ RVR 26	
Knots	ft/min	Min:Sec			
70					
90					
110					
130					
150					

ILS PRM RWY 15L