

RNAV (GNSS) PRM Z RWY 15L


ATIS – 120.82	ARR – 132.8 124.47 125.4 134.17	TWR – 118.35 118.7 PRM – 133.1	GND – 121.9 121.65 119.1	
SAFE ALT 100 NM 4900	WAAS Ch 80632 W15A	APCH CRS 146°	MIN ALT SEKUR 2000	LDA 10886

SEE ADDITIONAL REQUIREMENTS ON AAUP.


Simultaneous approach auth with RWY 15R.

Use of FD or AP required for simultaneous operations.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.0°/ TCH 79ft).

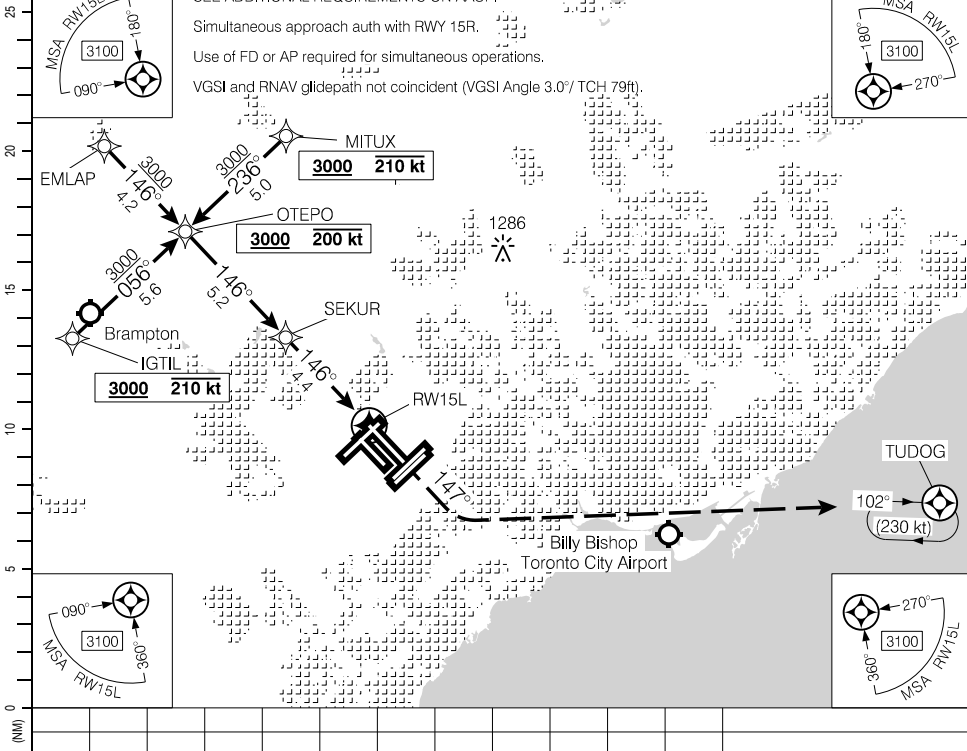

Source of Canadian Civil Aeronautical Data: © 2026 NAV CANADA All rights reserved

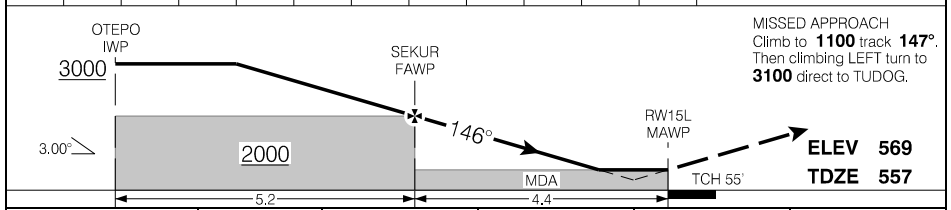

			CATEGORY	A	B	C	D
			LPV	757	(200)	1/4 RVR 26	
			LNAV/VNAV (min. -19°C, max. 54°C)	898	(341)	1 RVR 50	
Knots	ft/min	Min:Sec					
70							
90							
110							
130							
150							

RNAV (GNSS) PRM Z RWY 15L