


INSTRUMENT
APPROACH
CHART- ICAO

AERODROME ELEV 242 ft
HEIGHTS RELATED TO
THR RWY 28L - ELEV 202 ft

ATIS ARR 124.530
APP 121.100
FINALS 119.930
TWR STH 118.600
GND STH 121.800

DUBLIN/DUBLIN
ILS CAT I and II or LOC RWY 28L
(ACFT CAT A, B, C, D)

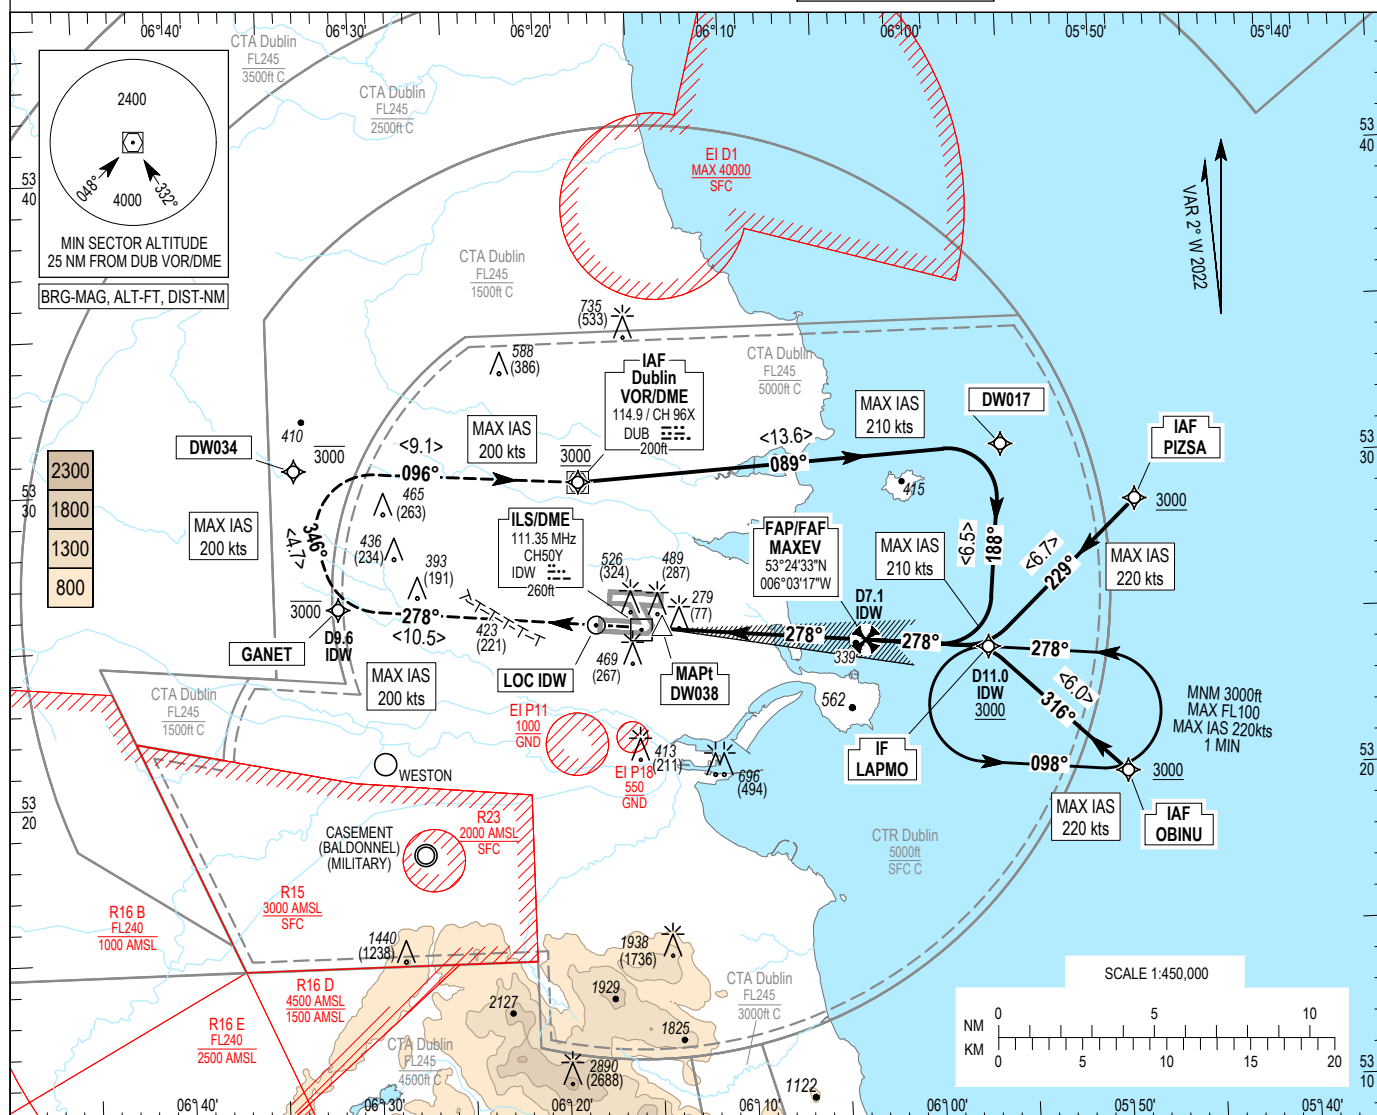

TRANSITION
ALTITUDE 5000 ft

GANET
D9.6 IDW

MAPt LOC
D0.5 IDW

FAP / FAF
MAXEV
D7.1 IDW

IF
LAPMO
D11.0 IDW

MISSED APPROACH:
Climb straight ahead to GANET, at
or below 3000ft, right turn to
DW034 and then proceed to DUB
VOR/DME (MAX IAS 200 kts) to
initiate another approach or as
instructed by ATC.

RDH 54

ILS/DME READS ZERO AT RWY 28L THR
ELEV 202 ft (THR RWY 28L)

NM FROM THR RWY 28L

OCA (H)

A

B

C

D

NOTE:

1. RNAV 1 required for initial and missed approach.
2. Timing not authorized for determining MAPt.
3. Motorway running almost parallel with RWY 10R/28L, 0.6NM to South of RWY.

Recommended LOC only Profile on Final Approach

DIST THR RWY 28L (NM)	2.0	3.0	4.0	5.0	6.0	7.0		
ALT / HT (ft)	890 (688)	1210 (1008)	1530 (1328)	1850 (1648)	2165 (1963)	2485 (2283)		
Ground Speed		fts	80	100	110	120	140	160
Descent rate gradient - 5.2% (3.0°) 318 ft/NM		ft / min	425	530	585	640	745	850

Dublin ILS RWY 28L via DUB

Nav. Spec.	WPT Name	Latitude (N)/ Longitude (W)	Path Term.	Fly-By Fly-over	True track / Mag. track	Distance (NM)	Upper limit / Lower limit	Speed Limit (kts)	VPA (°) / TCH (ft)	Remarks
RNAV 1	DUB	532957.8 / 0061825.6	IF	Fly-By	-	-	A3000 / A3000	-	-	-
RNAV 1	DW017	533039.7 / 0055538.6	TF	Fly-By	086.9 / 089	13.6	-	210	-	R
RNAV 1	LAPMO	532411.0 / 0055644.1	TF	Fly-By	185.7 / 188	6.5	- / +A3000	210	-	R

Dublin ILS RWY 28L via PIZSA

Nav. Spec.	WPT Name	Latitude (N)/ Longitude (W)	Path Term.	Fly-By Fly-over	True track / Mag. track	Distance (NM)	Upper limit / Lower limit	Speed Limit (kts)	VPA (°) / TCH (ft)	Remarks
RNAV 1	PIZSA	532844.3 / 0054833.6	IF	Fly-By	-	-	- / +A3000	220	-	-
RNAV 1	LAPMO	532411.0 / 0055644.1	TF	Fly-By	227.0 / 229	6.7	- / +A3000	220	-	R

Dublin ILS RWY 28L via OBINU

Nav. Spec.	WPT Name	Latitude (N)/ Longitude (W)	Path Term.	Fly-By Fly-over	True track / Mag. track	Distance (NM)	Upper limit / Lower limit	Speed Limit (kts)	VPA (°) / TCH (ft)	Remarks
RNAV 1	OBINU	532001.7 / 0054931.2	IF	Fly-By	-	-	- / +A3000	220	-	-
RNAV 1	LAPMO	532411.0 / 0055644.1	TF	Fly-By	314.0 / 316	6.0	- / +A3000	220	-	L

Dublin ILS CAT I & II or LOC Approach RWY 28L

Descent Angle:	3.00°			
Fix	IF LAPMO (D11 IDW)	FAF/FAP MAXEV (D7.1 IDW)	MAPt DW038 (D0.5 IDW)	TP GANET (D9.6 IDW)
Fix Coordinates	532411.0N 0055644.1W	532433.5N 0060317.3W	532510.0N 0061409.2W	532606.5N 0063133.8W
Fix Formation Bearing °T	275.51 IDW	275.43 IDW	275.29 IDW	243.90 DUB
Fix Formation Distances	11.00 IDW	7.06 IDW	0.53 IDW	9.61 IDW

Dublin ILS RWY 28L MISSED APP

Nav. Spec.	WPT Name	Latitude (N)/ Longitude (W)	Path Term.	Fly-By Fly-over	True track / Mag. track	Distance (NM)	Upper limit / Lower limit	Speed Limit (kts)	VPA (°) / TCH (ft)	Remarks
RNAV 1	GANET	532606.5 / 0063133.8	IF	Fly-By	-	-	-A3000 / -	200	-	-
RNAV 1	DW034	533037.4 / 0063342.6	TF	Fly-By	344.2 / 346	4.7	-A3000 / -	200	-	R
RNAV 1	DUB	532957.8 / 0061825.6	TF	Fly-By	094.0 / 096	9.1	A3000 / A3000	200	-	R

Hold Identification – LAPMO

Holding Fix	Latitude (N) / Longitude (W)	Inbound True Track (degrees)	Inbound Mag Track (degrees)	Maximum Indicated Airspeed (kts)	Minimum Holding Altitude/ Level (FL/ft)	Maximum Holding Altitude/ Level (FL/ft)	Outbound time (min)	Direction of Turn
LAPMO	532411.0 / 0055644.1	275.61	278	220	+A3000	-FL100	1	L