
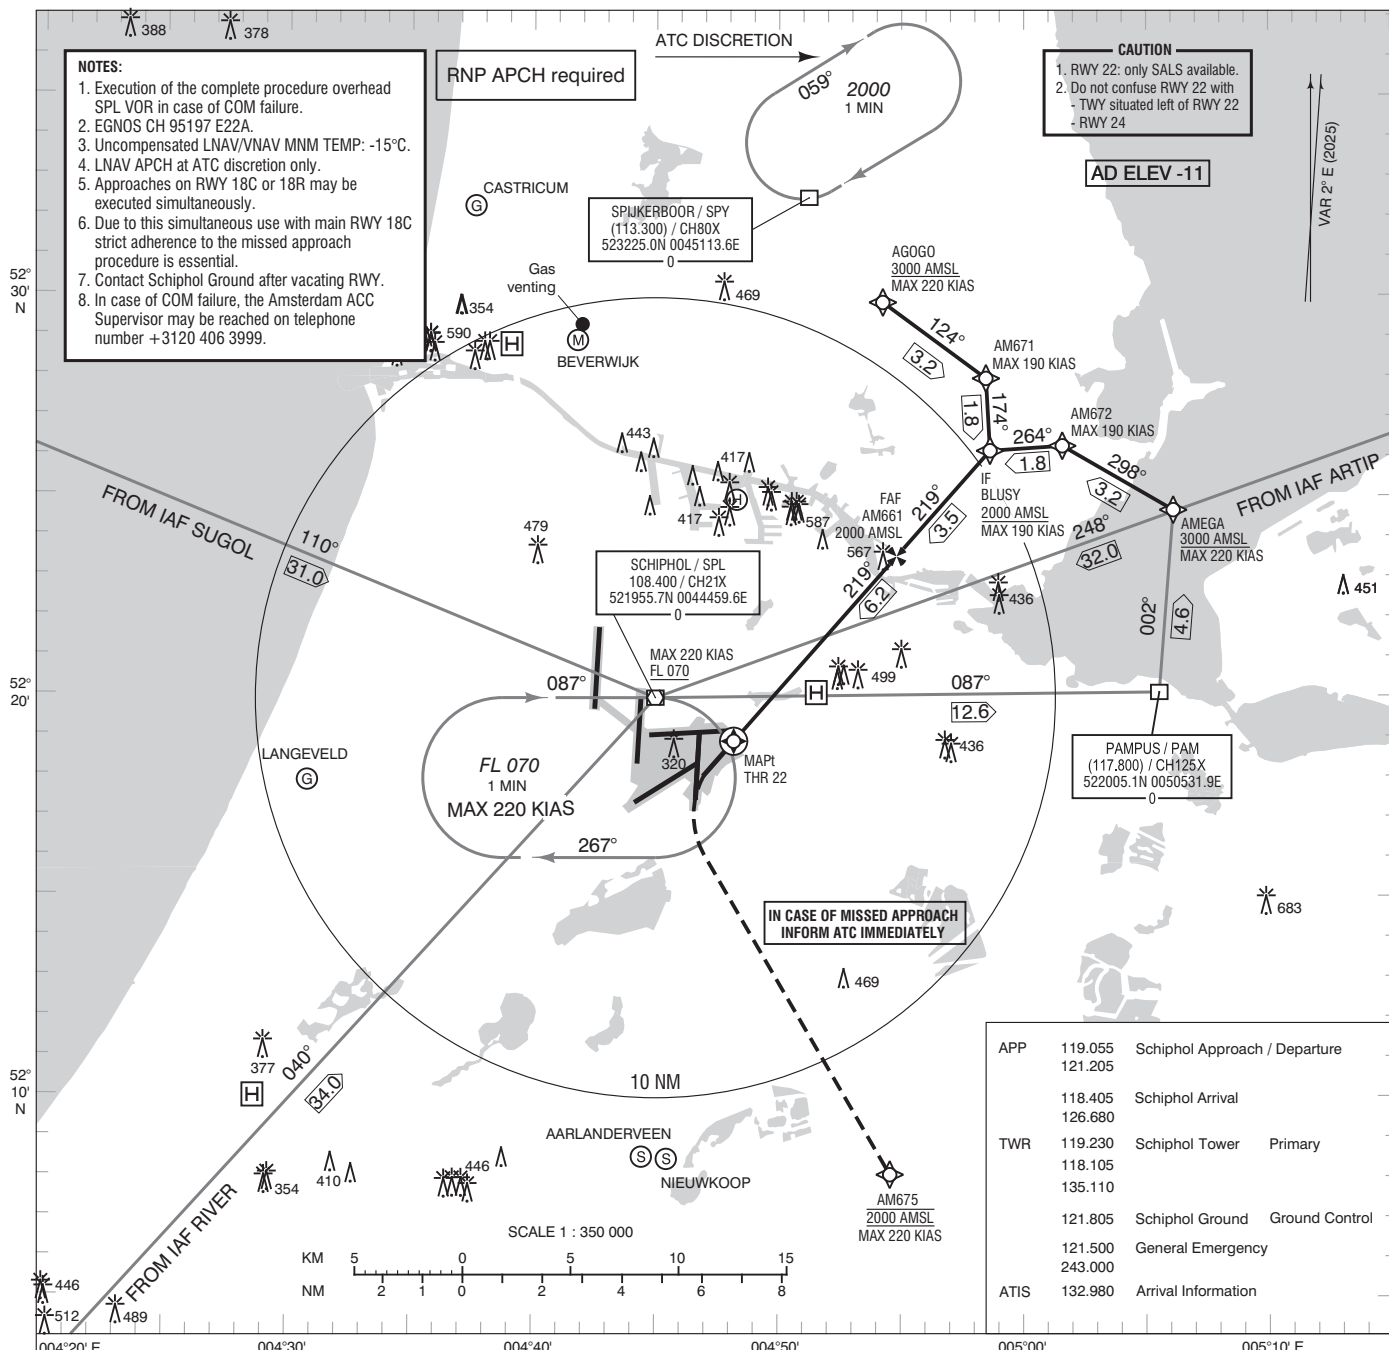




1. Missed approach:
 - Inform ATC immediately.
 - Turn left to AM675 as soon as practicable but not below 400 FT AMSL and climb to 2000 FT AMSL.
2. Missed approach in case of communication failure:
 - Turn left to AM675 as soon as practicable but not below 400 FT AMSL and climb to 3000 FT AMSL;
 - At 2000 FT AMSL start a left climbing turn to PAM so as to cross PAM at 3000 FT AMSL and proceed with the instrument approach procedure from PAM.

DIST RELATED TO THR 22

GS IN KT		60		80		100		120		140		160		180	
VERTICAL SPEED		320 FT/MIN		425 FT/MIN		530 FT/MIN		635 FT/MIN		745 FT/MIN		850 FT/MIN		955 FT/MIN	
OCA(OCH) ELEV THR 22: -13.7 FT														MSA BASED ON SPL VOR/DME 	
ACFT CAT	LPV	LNAV/VNAV MNM TEMP -15°	LNAV	CIRCLING*/**	* Circling procedures to and landing on RWY 18L and 36L is not permitted, except in case of an emergency. ** Caution: during circling to RWY 24 or RWY 27 identify correct RWY.										
A	503 (517)	503 (517)	580 (591)	630 (641)											
B				790 (801)											
C				890 (901)											
D				900 (911)											
CEILING AND VISIBILITY MINIMA															
TAKE-OFF	DAY:	NA		NIGHT:	NA		THR 22 521850.5N 0044810.9E AM661 522328.0N 0045449.2E AM671 522754.8N 0045827.5E AM672 522613.9N 0050134.7E AM675 520802.4N 0045434.1E DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET AMSL								
LANDING	DAY:	NA		NIGHT:	NA										