



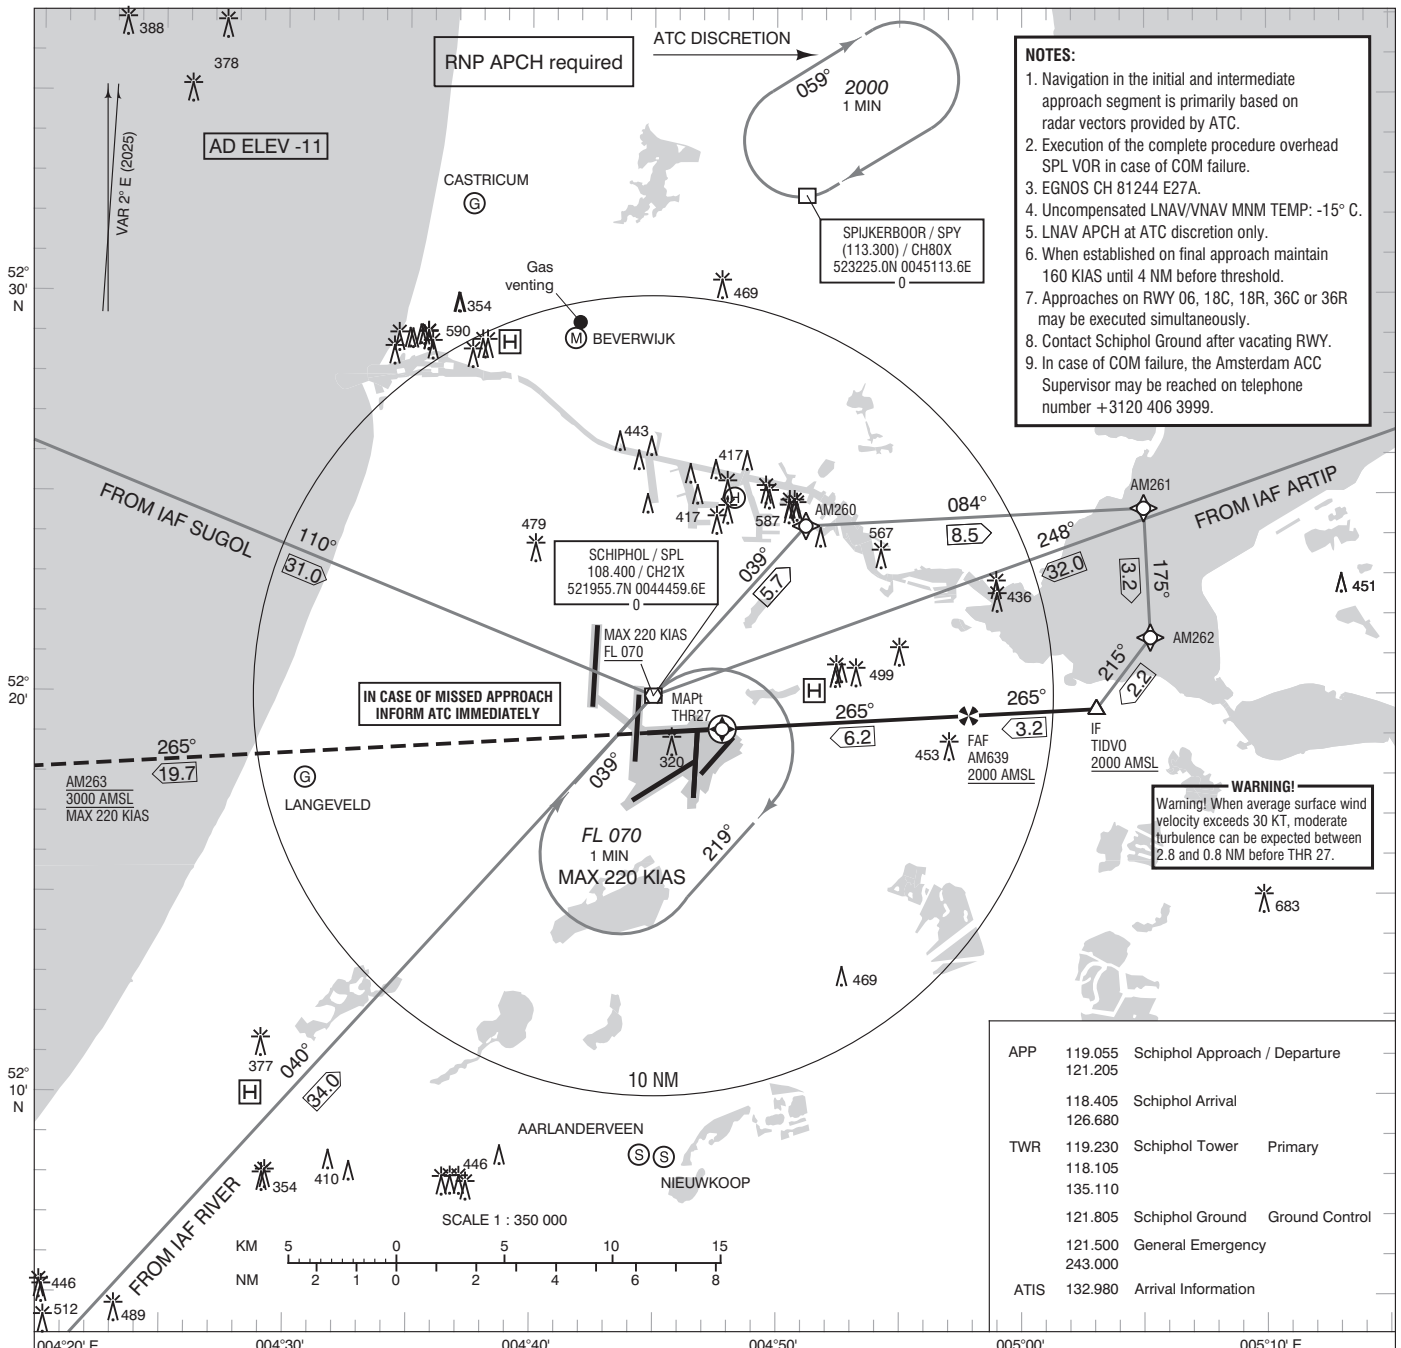

- Missed approach
 - Inform ATC immediately.
 - Track 265° MAG to AM263 and climb to 3000 FT AMSL.
- Missed approach in case of communication failure
 - Track 265° MAG and climb to 3000 FT AMSL;
 - When passing 2000 FT AMSL start a right turn to AM260 and cross AM260 at 3000 FT AMSL.
 - After AM260 descent to 2000 FT AMSL and execute the instrument approach procedure again.

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

RDH 50 FT

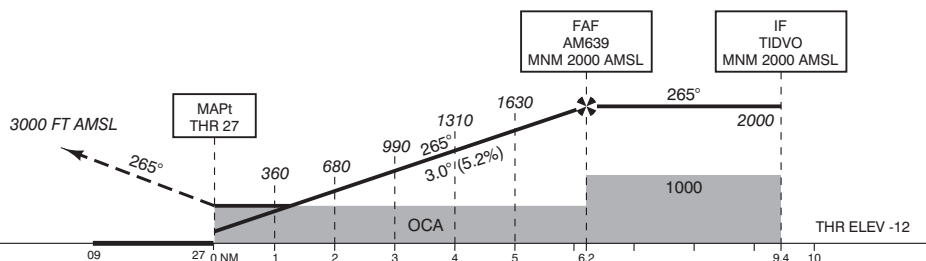

GS IN KT	60	80	100	120	140	160	180
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN
OCA (OCH) ELEV THR 27: -12.1 FT							
ACFT CAT	LPV	LNAV/VNAV	LNAV	CIRCLING*/**	* Circling procedures to and landing on RWY 18L and 36L is not permitted, except in case of an emergency. ** Caution: during circling to RWY 22 or RWY 24 identify correct RWY.		
A	265 (277)	264 (276)		630 (641)			
B	277 (289)	276 (288)		790 (801)			
C	285 (297)	295 (307)	520 (531)	890 (901)			
D	296 (308)	323 (335)		900 (911)			
DL							
CEILING AND VISIBILITY MINIMA					DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET AMSL		
TAKE-OFF	DAY:	NA	NIGHT:	NA			
LANDING	DAY:	NA	NIGHT:	NA			
					MSA BASED ON SPL VOR/DME		