



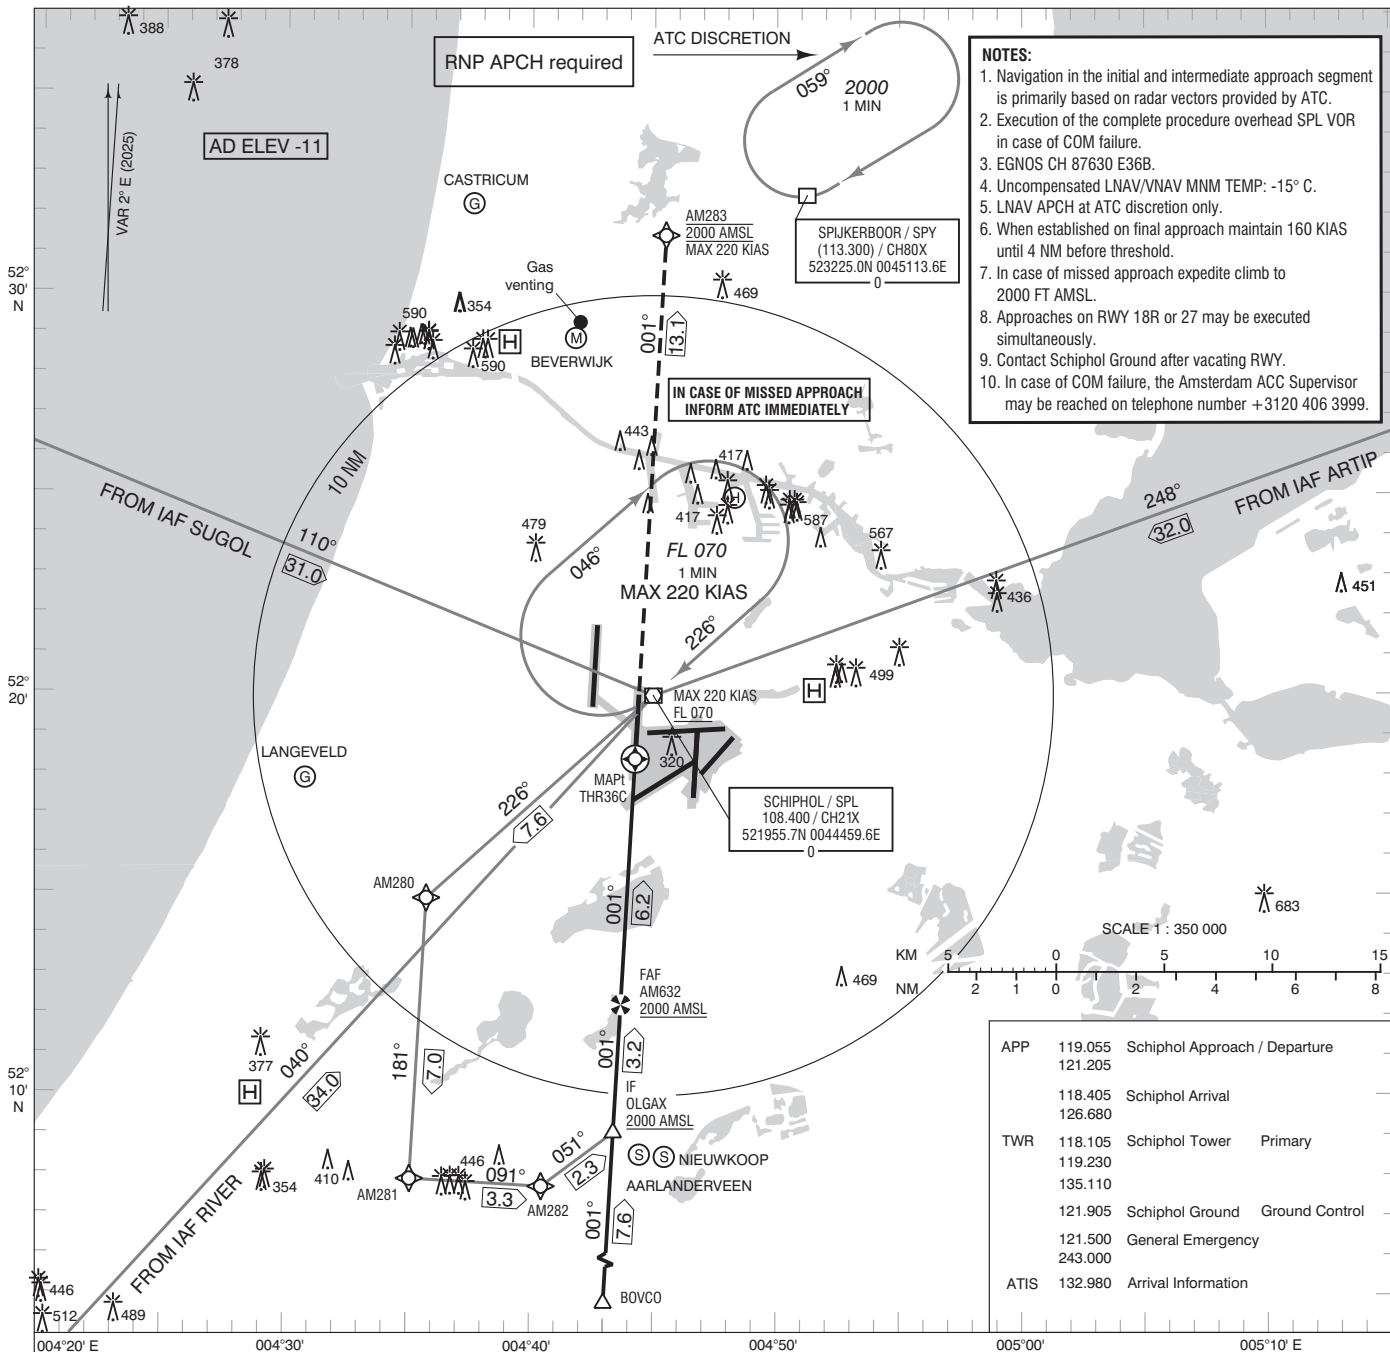

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

- Missed approach
- Inform ATC immediately
- Track 001° MAG to AM283 and climb to 2000 FT AMSL.
- Missed approach in case of communication failure:
- Track 001° MAG and climb to 3000 FT AMSL;
- When passing 2000 FT AMSL start a left turn to AM280 and cross AM280 at 3000 FT AMSL.
- After AM280 descent to 2000 FT AMSL and execute the instrument approach procedure again.

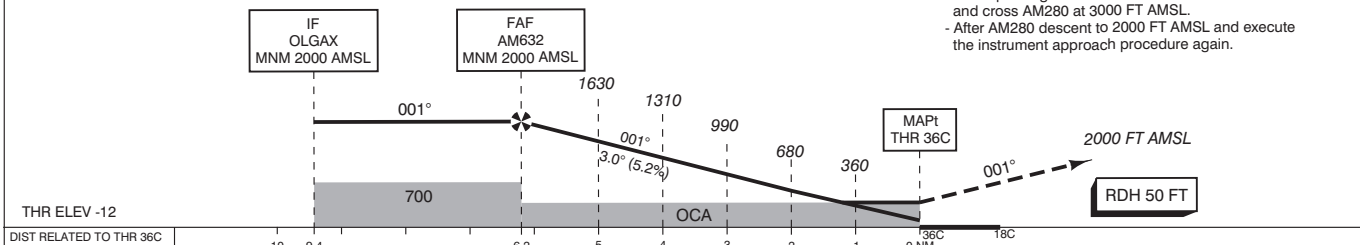

GS IN KT	60	80	100	120	140	160	180
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN

ACFT CAT	LPV	LNAV/VNAV	LNAV	CIRCLING*	* Circling procedures to and landing on RWY 18L and 36L is not permitted, except in case of an emergency.	THR 36C	AM280	AM281	AM282	AM283	AM632	MSA BASED ON SPL VOR/DME
A	201 (213)	335 (347)		630 (641)		521821.0N	521451.9N	520751.5N	520740.3N	523124.6N	521212.4N	1800
B	213 (225)	347 (359)		790 (801)		0044415.7E	0043546.5E	0043508.1E	0044028.9E	0044527.9E	0044341.9E	2300
C	221 (233)	366 (378)	400 (411)	890 (901)								
D	231 (244)	394 (406)		900 (911)								
DL												
CEILING AND VISIBILITY MINIMA					DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET AMSL							
TAKE-OFF	DAY:	NA	NIGHT:	NA								
LANDING	DAY:	NA	NIGHT:	NA								