


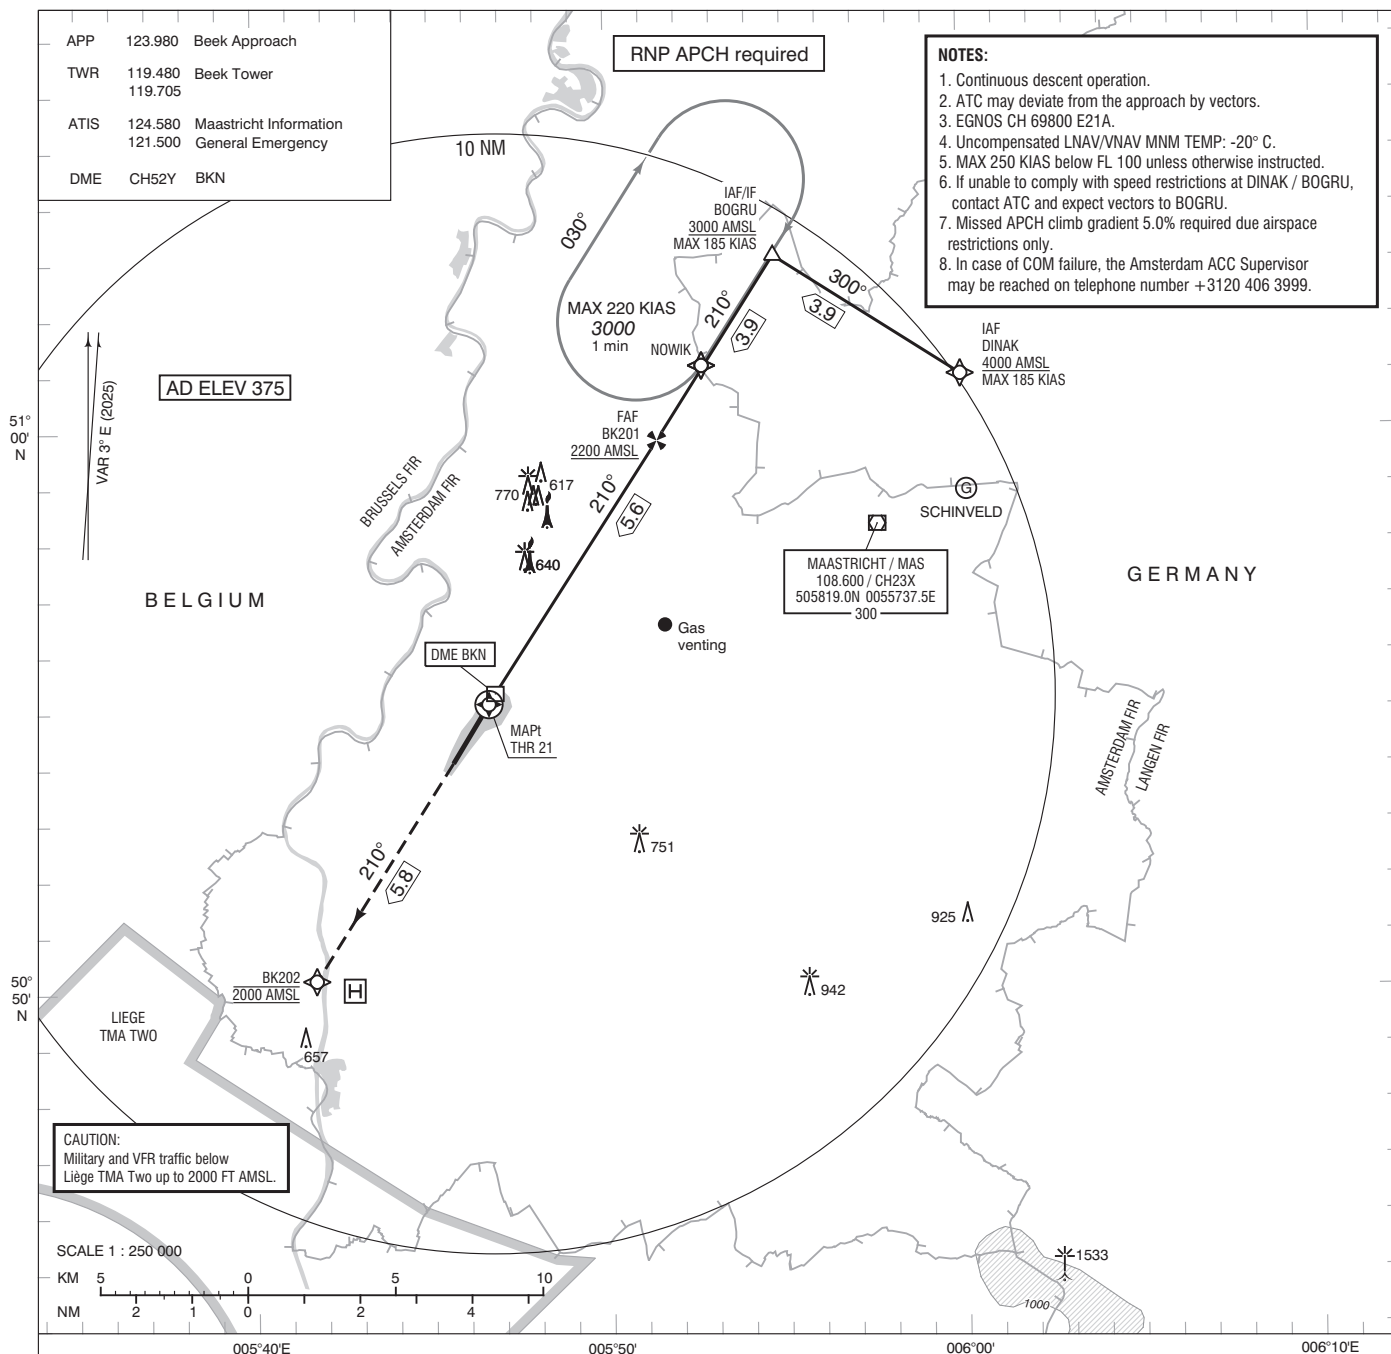

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

1. Missed Approach:
- Track 210° MAG to BK202 and climb to 2000 FT AMSL;
- Inform ATC.
2. Missed Approach in case of communication failure:
- Track 210° MAG and climb to 3000 FT AMSL;
- At 3.4 BKN beyond the runway turn left track 129° MAG;
- When passing 2300 FT AMSL turn left to NOWIK;
- Cross NOWIK at 3000 FT AMSL and execute the instrument approach procedure again.

RDH 50 FT

2000 AMSL

MAPt
THR 21

740

1050

1370

1690

FAF
BK201
MNM 2200 AMSL

2010

210°

IF
BOGRU
MNM 3000 AMSL

THR ELEV 371

DIST RELATED TO THR 21							
GS IN KT	60	80	100	120	140	160	180
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN

OCA (OCH) ELEV THR 21: 370.5 FT

ACFT CAT	LPV		LNAV / VNAV MNM TEMP: -20°C		LNAV		CIRCLING	THR 21 BK201 BK202	505508.0N 0054638.3E 505950.2N 0055124.8E 505013.6N 0054141.1E
	5.0%	2.5%	5.0%	2.5%	5.0%	2.5%			
A	607 (236)	1295 (924)	644 (273)	1308 (938)	820 (445)	1310 (929)	890 (520)		
B	619 (248)	1301 (930)	655 (284)	1325 (954)			940 (570)		
C	627 (256)	1304 (934)	662 (291)	1335 (965)			1170 (800)		
D	638 (267)	1310 (939)	671 (300)	1348 (978)					
DL	638 (267)	1310 (939)	671 (300)	1348 (978)					

CEILING AND VISIBILITY MINIMA

TAKE-OFF	DAY:	NA	NIGHT:	NA
LANDING	DAY:	NA	NIGHT:	NA

DIRECTIONS ARE MAGNETIC
DISTANCES IN NM
ALTITUDES AND ELEVATIONS
IN FEET

MSA BASED ON MAS VOR/DME

