

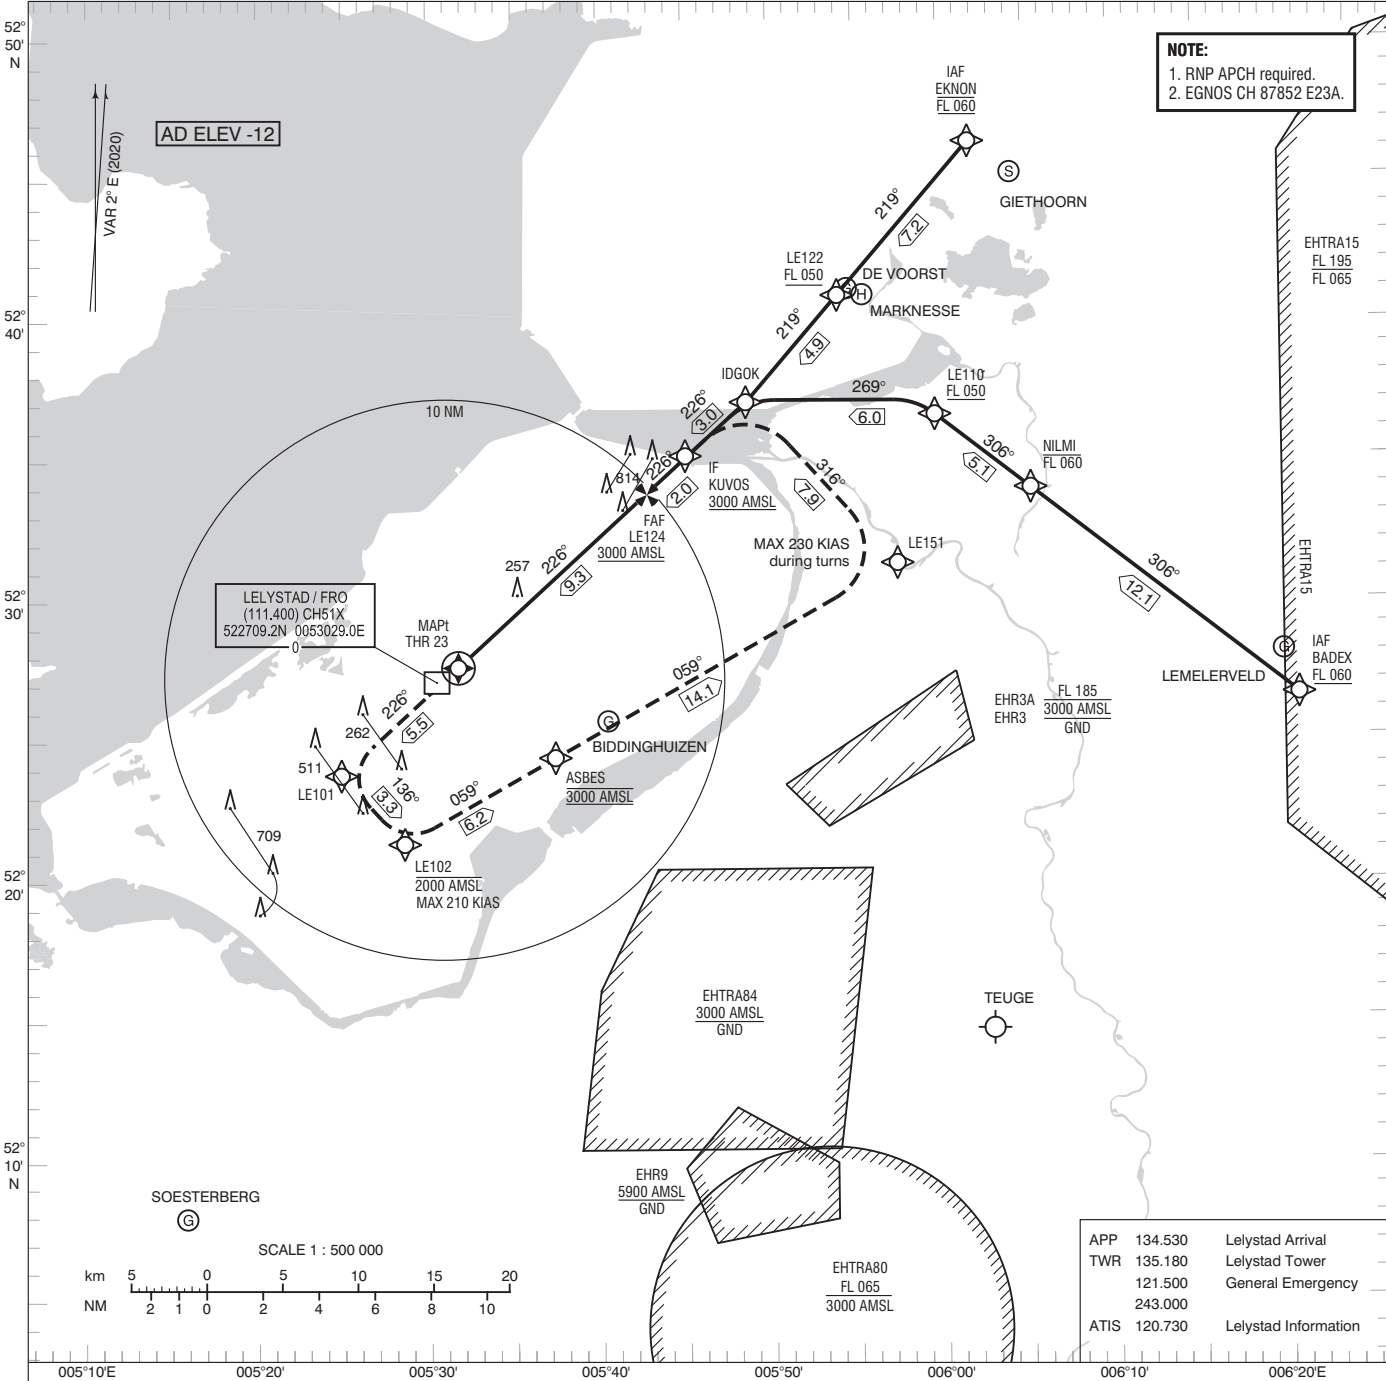


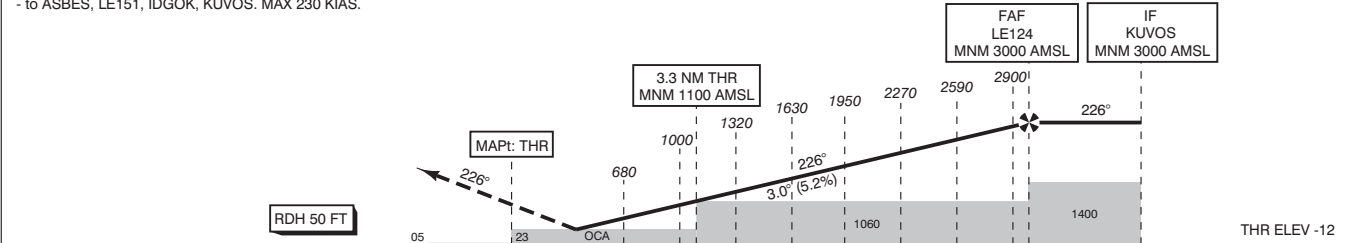

Missed approach:
- climb via LE101 and LE102 to 2000 FT AMSL;
- bank angle 25° (CAT C/D) and MAX 210 KIAS during the turn;
- at LE102 climb to 3000 FT AMSL;
- to ASBES, LE151, IDGOK, KUVOS. MAX 230 KIAS.

TRANSITION ALTITUDE 3000 FT AMSL



DIST RELATED TO THR		5	05	0	1	2	3.3	4	5	6	7	8	9.3	11.3	12
GS IN KT		60		80		100		120		140		160		180	
VERTICAL SPEED		320 FT/MIN		430 FT/MIN		540 FT/MIN		650 FT/MIN		760 FT/MIN		870 FT/MIN		980 FT/MIN	
OCA (OCH)ELEV THR 23: -12 FT														MSA BASED ON ARP 	
ACFT CAT	LPV	LNAV / VNAV MNM TEMP -20°C		LNAV	CIRCLING	THR 23 522733.78N 0053132.16E LE101 522350.4N 0052453.1E LE102 522123.3N 0052833.4E LE110 523706.1N 0055839.8E LE122 524051.5N 0055403.3E LE124 523349.3N 0054247.0E LE151 523118.5N 0055727.9E									
A	233 (245)	265 (277)		510 (522)	NOT ALLOWED										
B	245 (257)	277 (289)													
C	253 (265)	285 (297)													
D	264 (276)	296 (308)													
CEILING AND VISIBILITY MINIMA															
TAKE-OFF	DAY:	NA					DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET								
LANDING	DAY:														

