


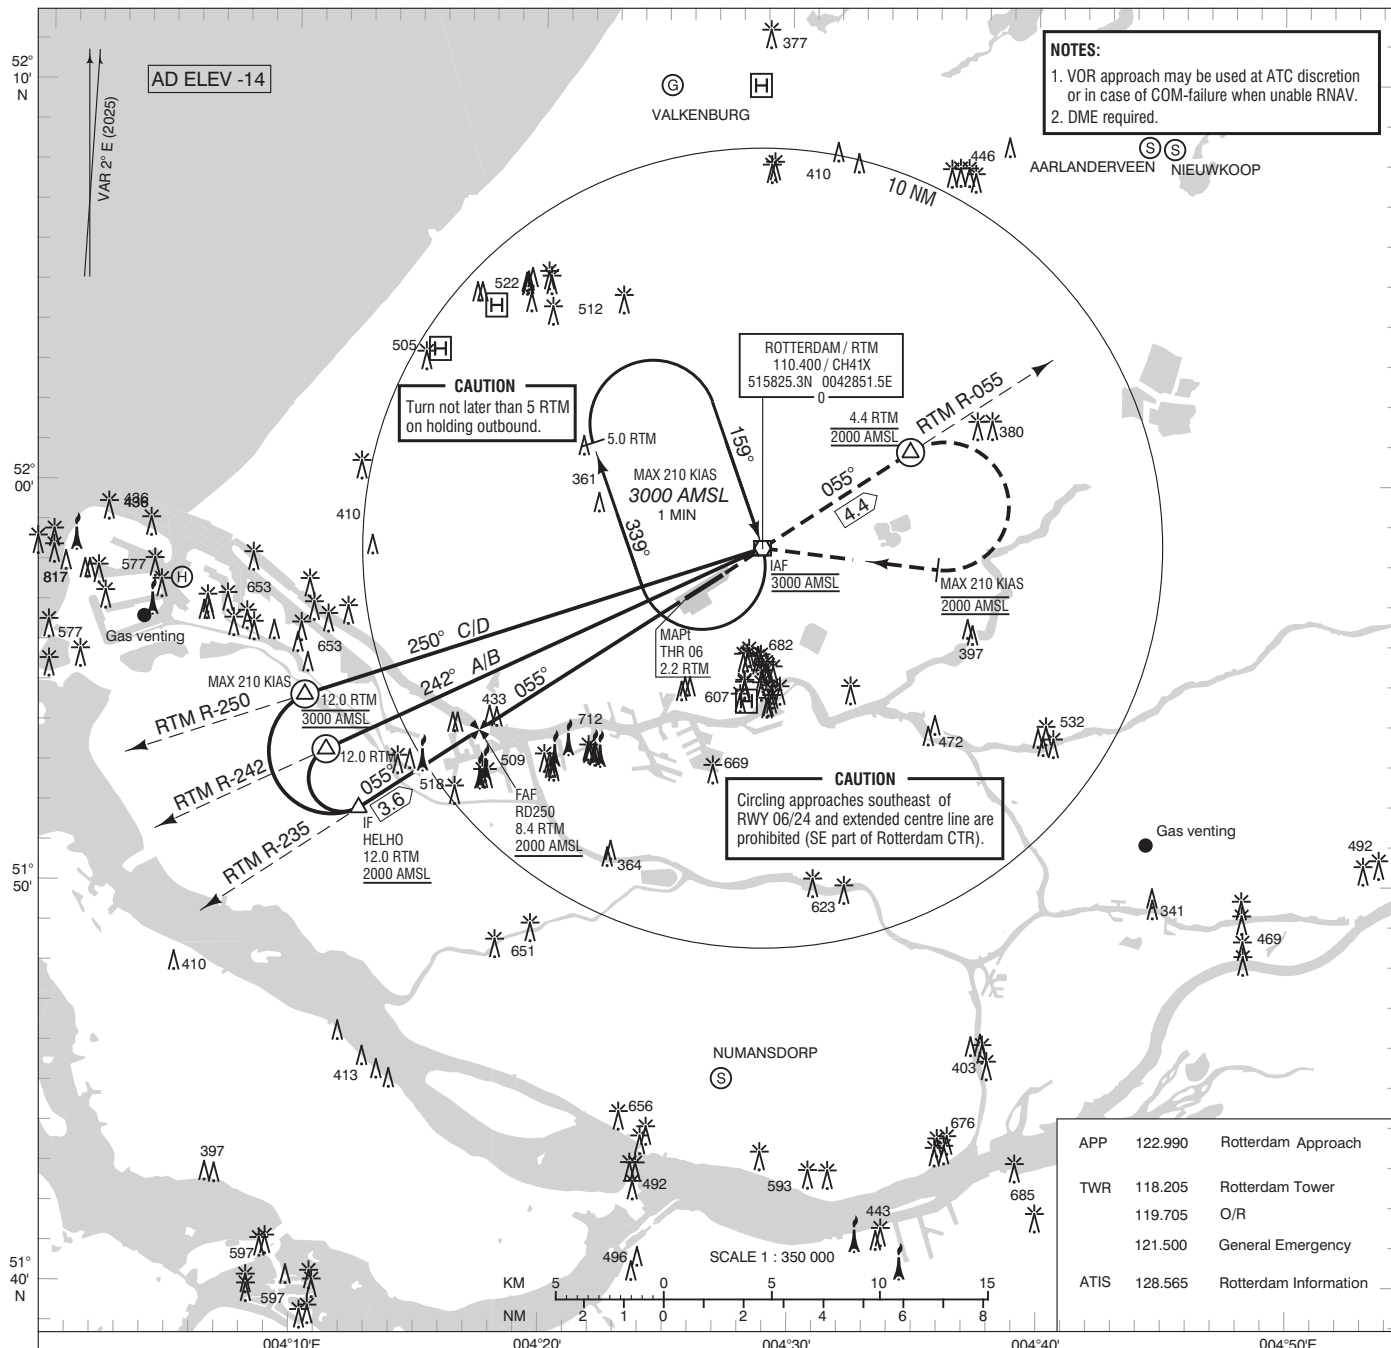

TRANSITION LEVEL BY ATC
TRANSITION ALTITUDE 3000 FT AMSL

IF
HELHO
12.0 RTM
MNM 2000 AMSL

FAF
RD250
8.4 RTM
MNM 2000 AMSL

5.2 RTM
MNM 990 AMSL

MAPT: THR
2.2 RTM

RTM

2000 FT AMSL

Missed approach:

- Climb on track 055° MAG to 2000 FT AMSL;
- Inform ATC;
- At 4.4 RTM turn right (MAX 210 KIAS) and maintain 2000 FT AMSL;
- When established inbound RTM climb to 3000 FT AMSL.

THR ELEV -14

DIST RELATED TO RTM DME

GS IN KT	60	80	100	120	140	160	180
VERTICAL SPEED	320 FT/MIN	425 FT/MIN	530 FT/MIN	635 FT/MIN	745 FT/MIN	850 FT/MIN	955 FT/MIN

OCA(OCH) ELEV THR 06: -14.4 FT

ACFT CAT	VOR MAPt: THR	CIRCLING*	* Circling SE of RWY 06/24 is prohibited (see CAUTION).	THR 06 515711.0N 0042550.4E	RD250 515350.0N 0041728.8E
A	470 (484)	490 (504)			
B		960 (974)			
C		1050 (1064)			
D		1050 (1064)			
CEILING AND VISIBILITY MINIMA					
TAKE-OFF	DAY:	NA	NIGHT:	NA	DIRECTIONS ARE MAGNETIC DISTANCES IN NM ALTITUDES AND ELEVATIONS IN FEET
LANDING	DAY:	NA	NIGHT:	NA	

MSA BASED ON RIM VOR/DME

MSA BASED ON RTM VOR/DME

