


What the electrical training interface changes—and what it does not


Same final electrical repair · lower error is better · fixed historical endpoints

◆ E (filled diamond) ○ Paired control (open circle) — E has larger error


A E / F · four paired fits

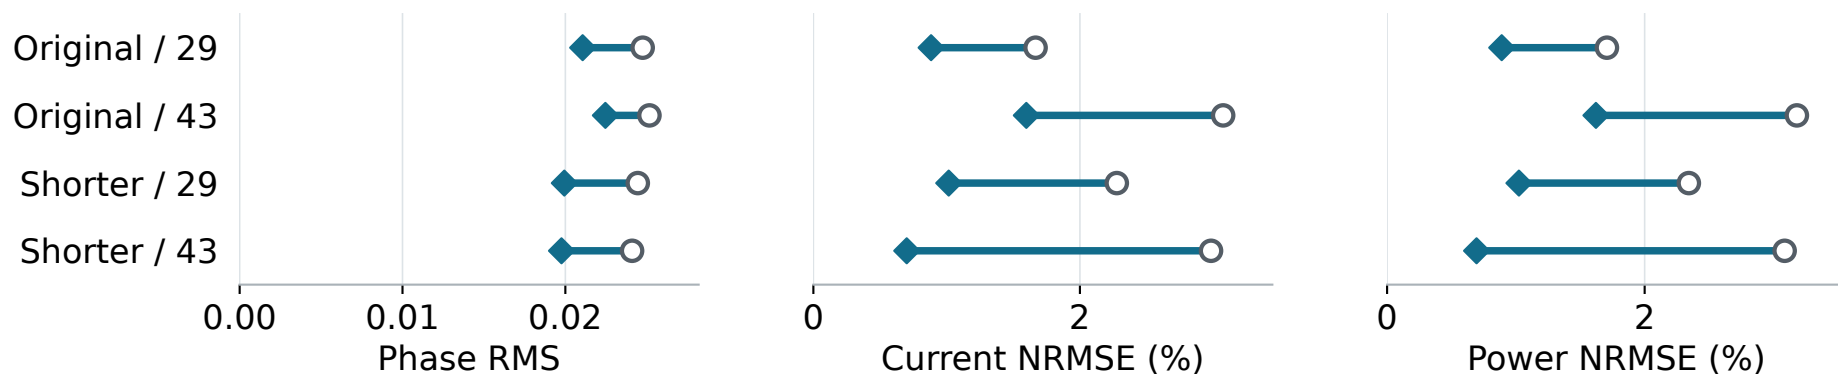


B E / F_{cov} · coverage-enhanced soft electrical control

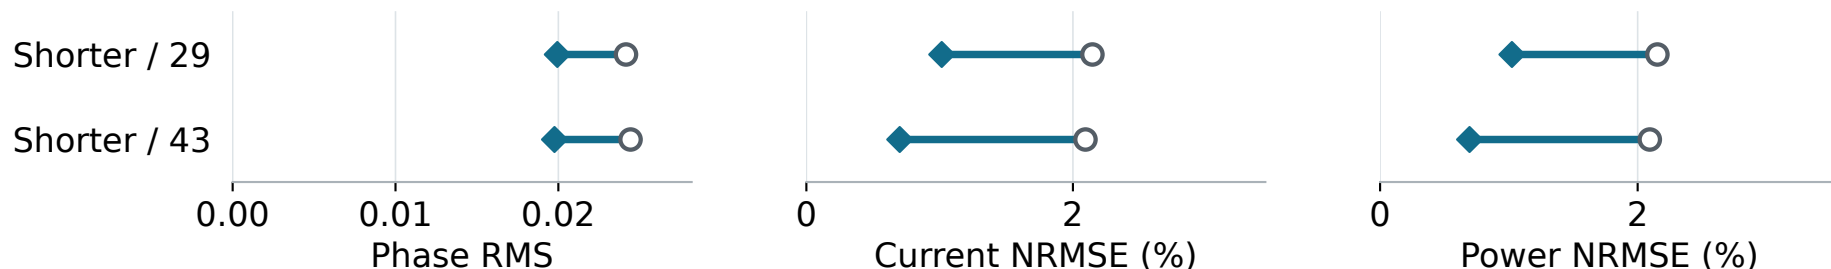

C E / D_E · added thermal/phase residual package (detail axes)

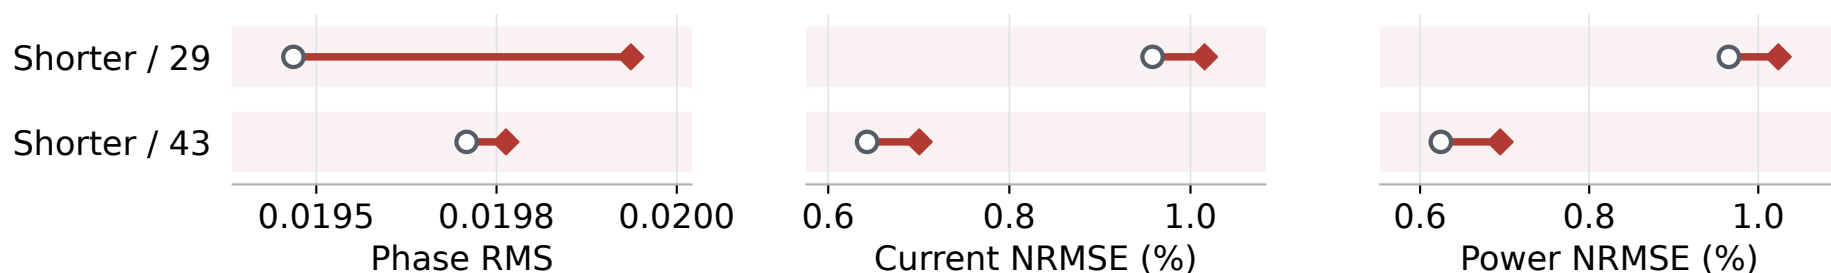

D E / B_E · interpolation boundary, original / 43 (detail axes)

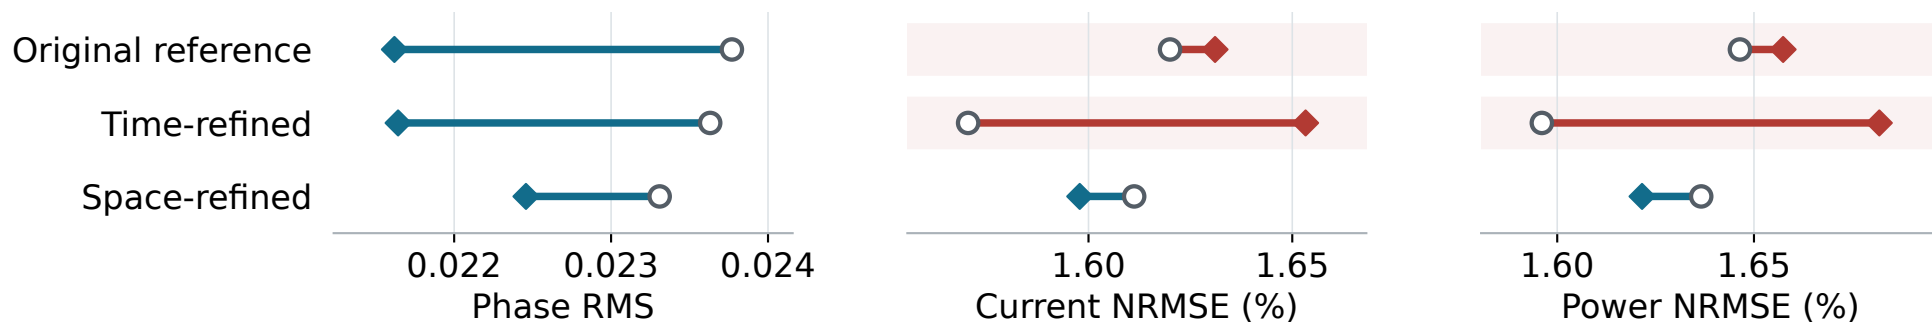

A–C: spatial reference / fine reader. D: three references / fine reader. C–D: expanded raw-error axes.

Phase: original 160 × 80 ROI; ports: native 240 × 120. Configuration comparisons; no isolated VJP attribution.