

FAST MOVING TECHNOLOGY

STÄUBLI

TX2-60 Range

6 axis industrial robots



Characteristics

	TX2-60	TX2-60L
Load capacity	4.5 kg	3.7 kg
Reach (between axis 1 and 6)	670 mm	920 mm
Number of degrees of freedom	6	6
Repeatability - ISO 9283	± 0.02 mm	± 0.02 mm
Power Consumption - VDMA 24608	0.405 kW	0.4 kW
Weight	52.2 kg	52.9 kg
UL certification	✓	✓
Attachment methods		

Performance

Joint speed -axis 1	435°/s	435°/s
Joint speed -axis 2	410°/s	385°/s
Joint speed -axis 3	540°/s	500°/s
Joint speed -axis 4	995°/s	995°/s
Joint speed -axis 5	1065°/s	1065°/s
Joint speed -axis 6	1445°/s	1445°/s
Maximum speed at load gravity center	8.4 m/s	11.1 m/s
Maximum inertia axis 5	0.325 kg.m²	0.125 kg.m²
Maximum inertia axis 6	0.1 kg.m²	0.032 kg.m²
Brakes	All axes	

Work envelope and range of motion

Maximum reach between axis 1 and 5 (R. M)	600 mm	850 mm
Minimum reach between axis 1 and 5 (R.m1)	190 mm	209 mm
Minimum reach between axis 2 and 5 (R.m2)	189 mm	208 mm
Reach between axis 3 and 5 (R.b)	310 mm	450 mm


Axis 1 (A)	± 180°	± 180°
Axis 2 (B)	± 127.5°	± 127.5°
Axis 3 (C)	± 142.5 °	± 152.5 °
Axis 4 (D)	± 270°	± 270°
Axis 5 (E)	+ 132.5°/-121°	+ 132.5°/-121°
Axis 6 (F)	± 270° (1)	± 270° (1)

(1) Software configurable up to ± 11 250°

Installation environment


Working temperature according to NF EN 60 204-1	+5°C to +40°C
Humidity according to NF EN 60 204-1	30% to 95% max non-condensing
Vertical cable outlet version	Available
Pressurized version	Available
Controller	CS9
Cleanroom standard ISO 14644-1	5
Protection class according to EN 60529	IP65/IP67

Cable outlet horizontal and vertical (option)

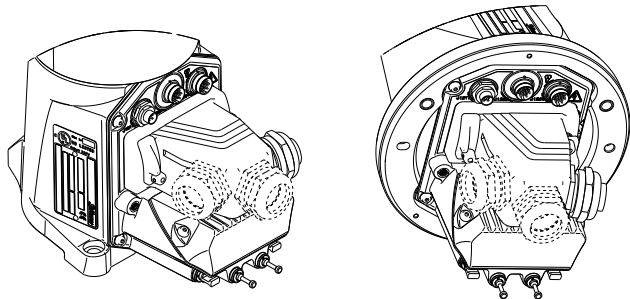


User interface



FOREARM CONNECTIONS	
Pneumatic	2 direct lines between base and forearm or 2 optional solenoid valves : bi-stable solenoid valves 5/2 « pressure » or mono-stable « center close » solenoid valves 5/3 « pressure » or Mono-stable solenoid valves 3/2 « vacuum »
Electrical	10 electrical lines I/O and Multibus cable inside the arm + 3 electrical lines + 4 Multibus cable cat 5e lines, DIN M12

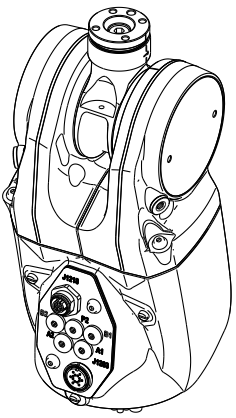

Dimensions

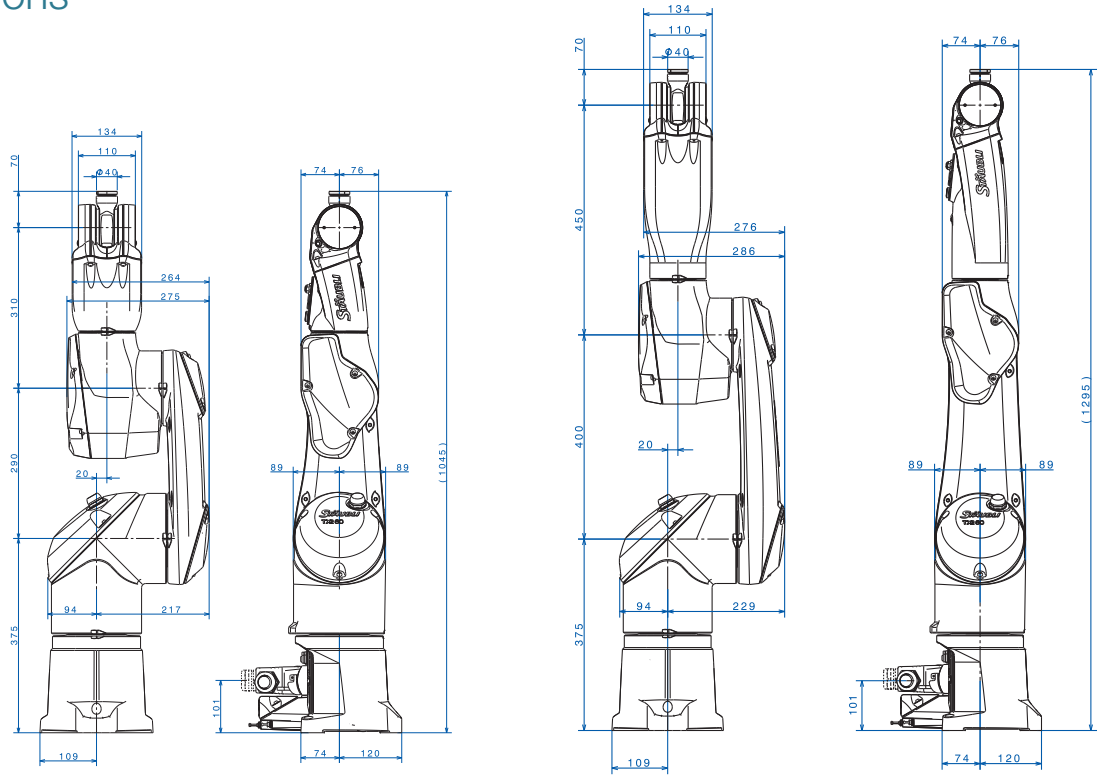

Mounting (not for vertical cable outlet option)

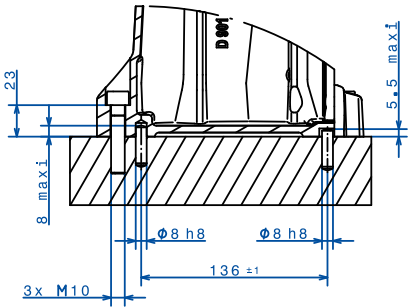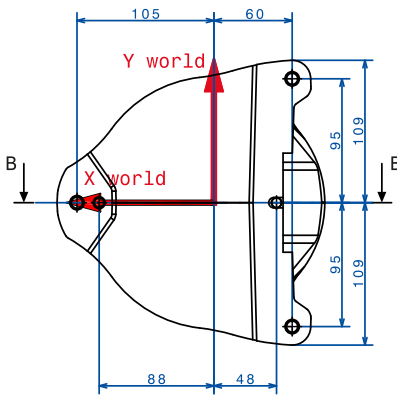

Sensitive environment versions

Automotive, Metal	Harsh, Humid	Available
Pharma, Medical Devices	Stericlean +, Stericlean, Access	Available
Food	Hygienic	Available
Electronics	ESD (IEC 61340-5-1:2024 / ANSI-ESD S20.20)	Available
Semi-conductor	CR (Cleanroom) ISO 14644-1 Class 4, SCR (Supercleanroom) ISO 14644-1 Class 2	Available

Available options

Vertical cable outlet	for smarter integration
H1 oil and grease	for hygienic demands



● Stäubli Units ○ Representatives / Agents

Global presence of the Stäubli Group

www.staubli.com