Sheet: VeraModule

VERA FPGA

File: vera-fpga.sch

Sheet: BusDecoder

BUS DECODER

File: busdecoder.sch

Sheet: Vera FPGA flash

VERA SPI FLASH
SD CARD INTERFACE

File: vera-fpga-flash.sch

Sheet: CartridgeInterface

CARTRIDGE INTERFACE

File: cartridgeInterface.sch

Sheet: PowerSupply

POWER SUPPLY

File: powersupply.sch

Sheet: VGA Analog

VGA ANALOG

File: vga-analog.sch

FIDUCIAL TOP

FID3 Fiducial

FID4 Fiducial

FIDUCIAL BOTTOM

FID2 Fiducial

FID1 Fiducial

LOGO1
VERA X16 LOGO

LOGO2
ATARI READY

LOGO3
KiCAD DESIGN

LOGO4
ATARI DUO BUS

LOGO5
ESP32_BOBOARD

LBL1

H1
MountingHole

H2
MountingHole

H3
MountingHole

H4
MountingHole


Gianluca Renzi
RetroBit Lab

Sheet: /
File: VERA-MODULE-RBL.sch


Title: VERA FPGA Audio & Video Board

Size: A4	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 1/7


FPGA VERA LOGIC VIDEO & AUDIO CARD

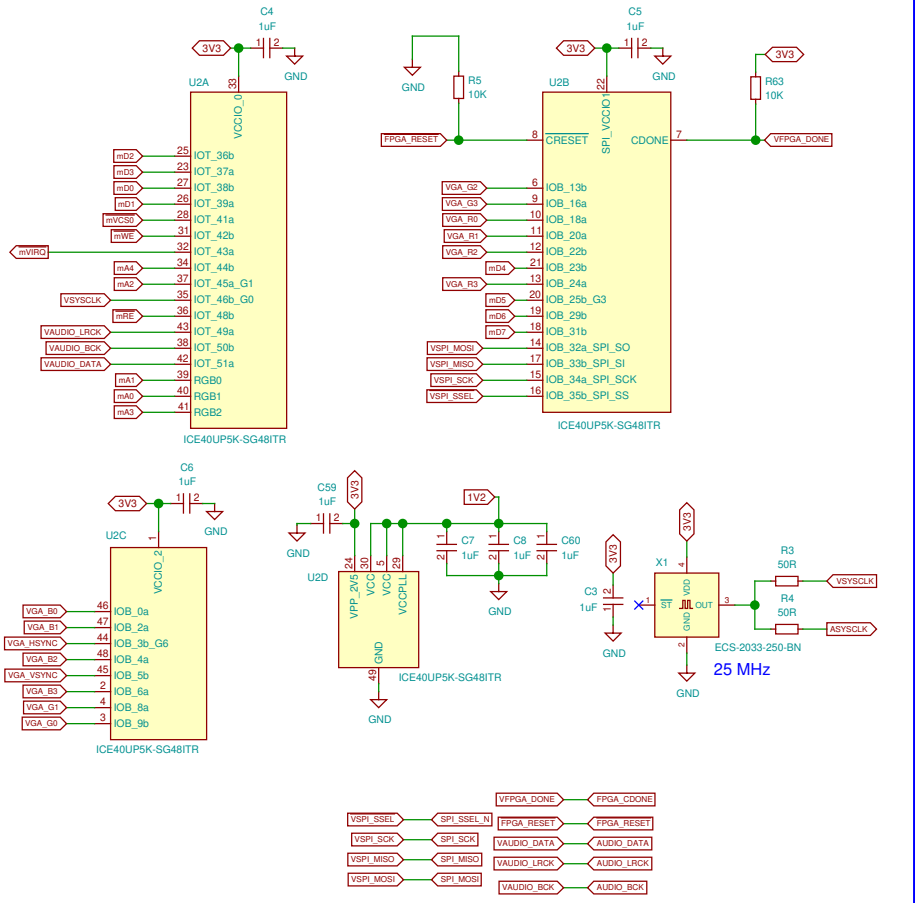

iceprog programmer USB FTDI / SPI

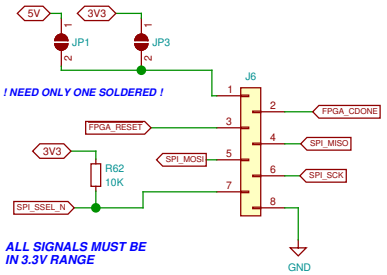



VERA FPGA PROGRAMMED OK





Gianluca Renzi		
RetroBit Lab		
Sheet: /VeraModule/		
File: vera-fpga.sch		
Title: VeraModule		
Size: A4	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 2/7


PBI DEVICE ID: software selectable only

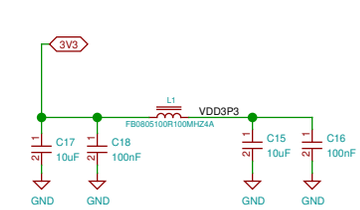







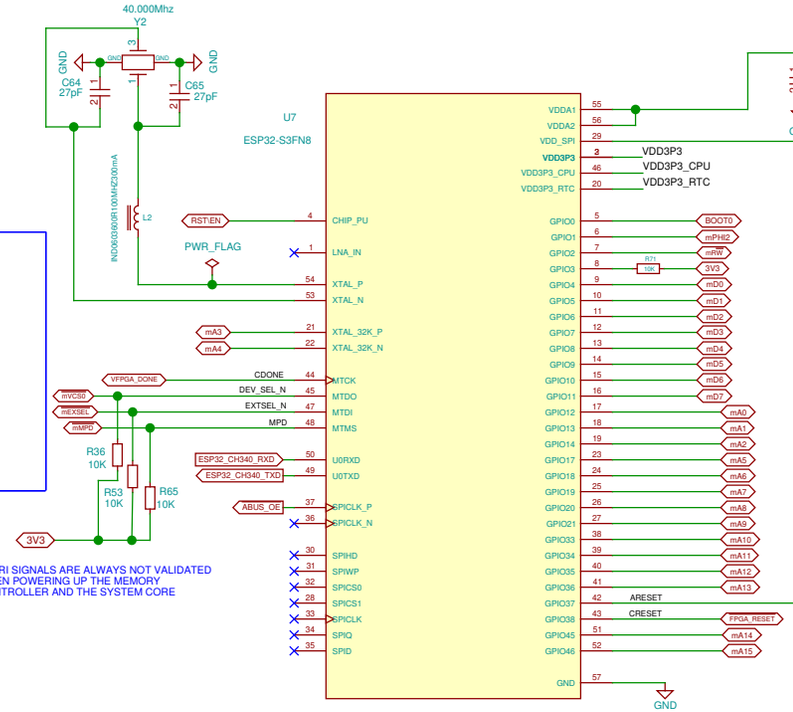

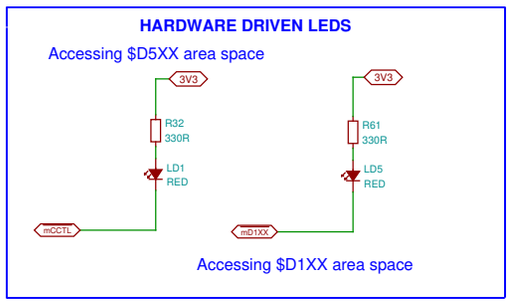

PBI Bus Interface Decoder:
I/O Space, Math Pack Disable, ROM ADDRESS ($D800-$DFFF),
RAM PBI SPACE ($D600-$D7FF)

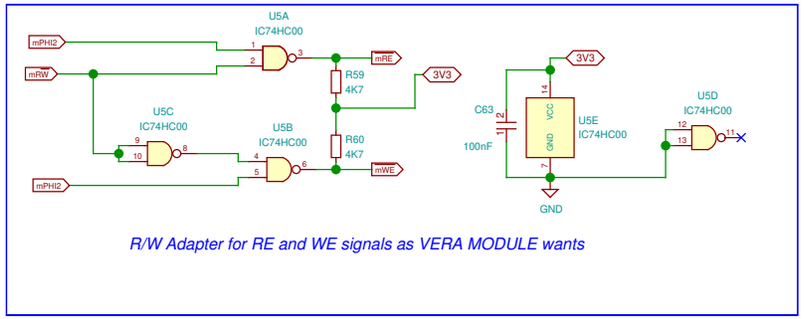

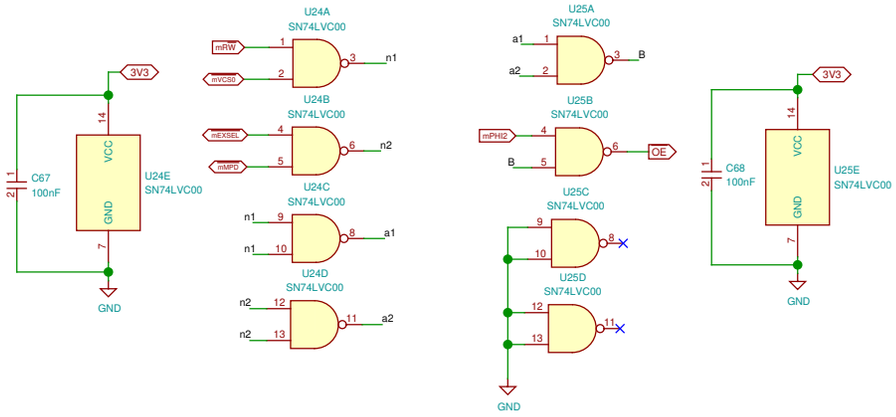

When VERA Chip Select (mVCS0) latch is active & A15..A0 $D800-$DFFF -> MPD active (External 2K ROM)
When VERA Chip Select (mVCS0) latch is active & A15..A0 $D600-$D7FF -> EXSEL active (External 512 bytes RAM)
When access @ $D1xx and VERA Chip Select (mVCS0) latch is active -> EXSEL active

Gianluca Renzi
RetroBit Lab


Sheet: /BusDecoder/
File: busdecoder.sch

Title: BusDecoder


Size: A3	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 3/7


ATARI 130XE ECI & CARTRIDGE INTERFACE

All 8-Bit signals must be shifted from 5V to 3.3V and vice versa

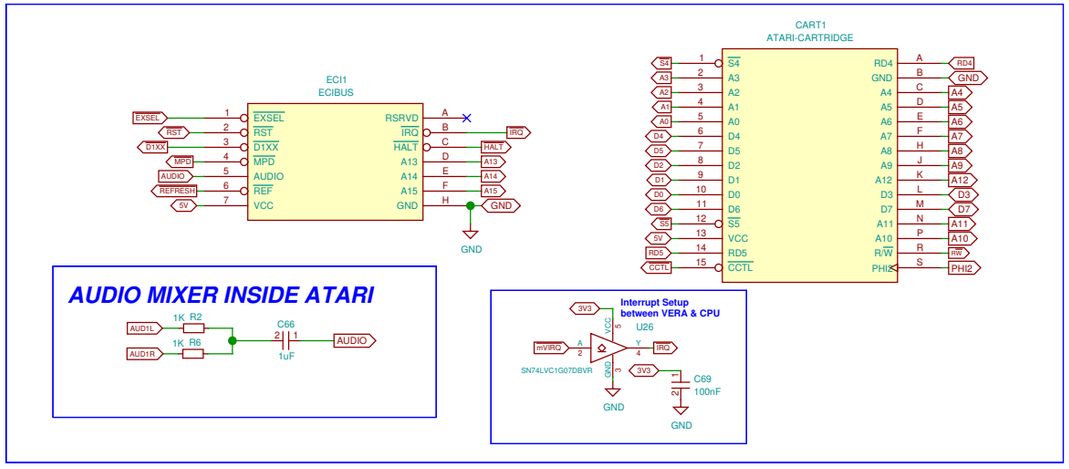



UNCONNECTED IN THIS PROJECT




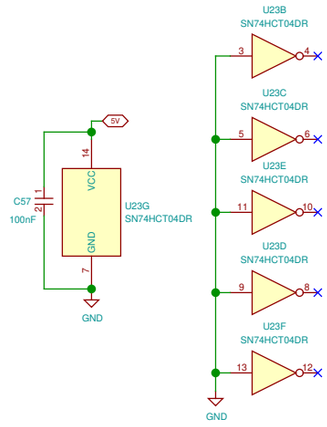

BUS LOGIC LEVEL SHIFTERS

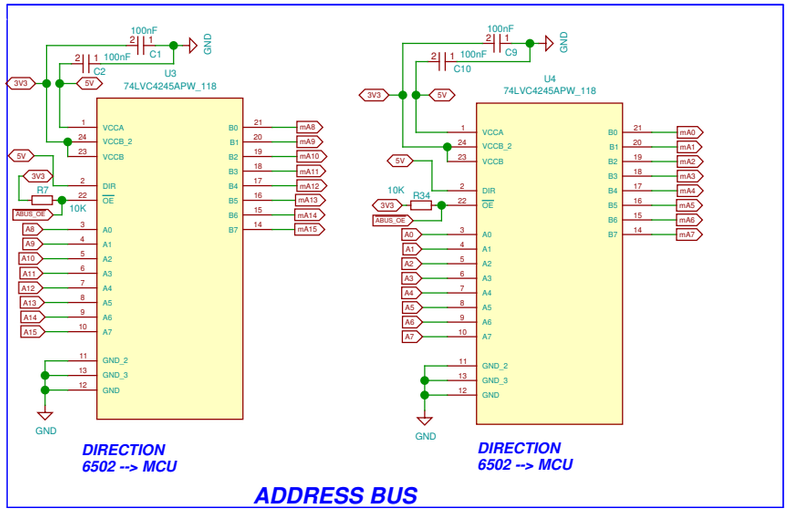


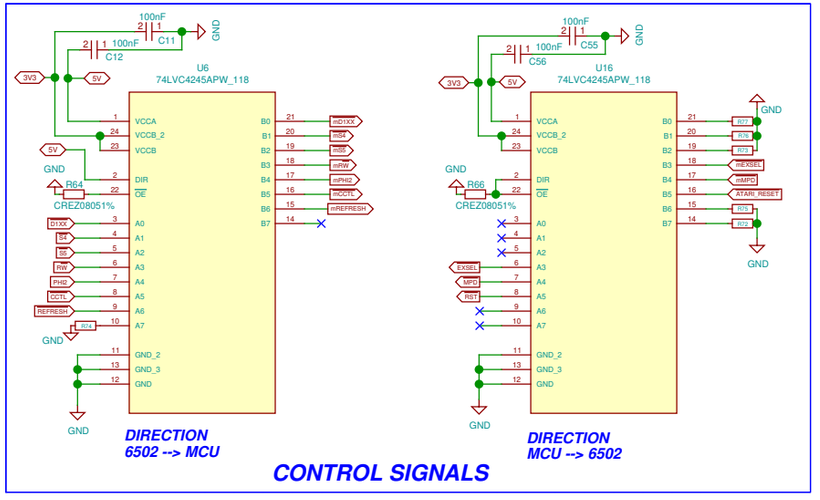

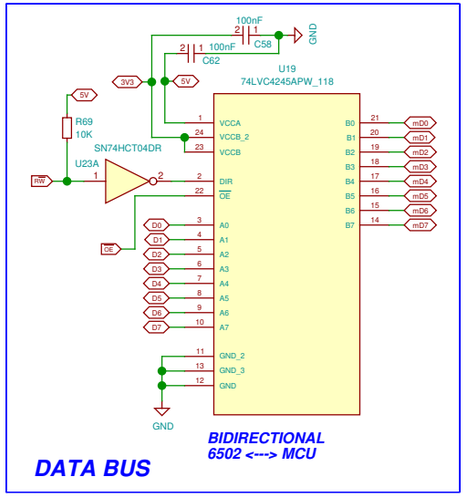


Gianluca Renzi		
RetroBit Lab		
Sheet: /CartridgeInterface/		
File: cartridgeInterface.sch		
Title: CartridgeInterface		
Size: A3	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 4/7

FPGA/SSD Flash Glue Logic

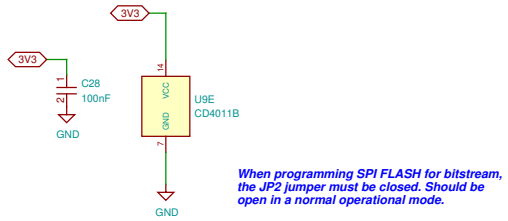


SD/microSD INTERFACE

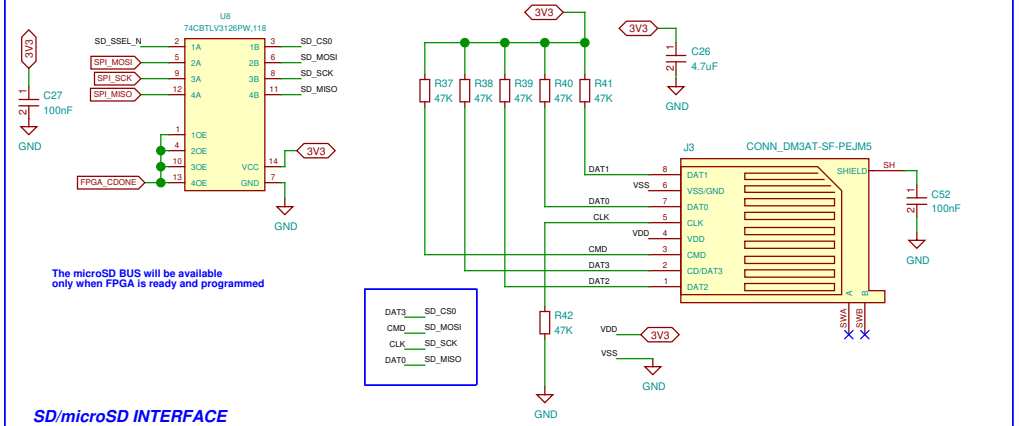


The microSD BUS will be available only when FPGA is ready and programmed


SPI 16MB FLASH

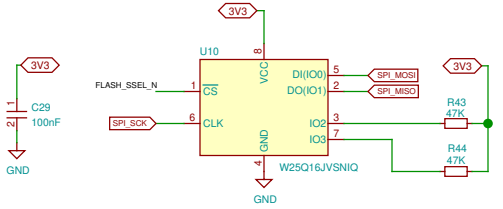

IC DAC/AUDIO 24BIT 192K 16TSSOP

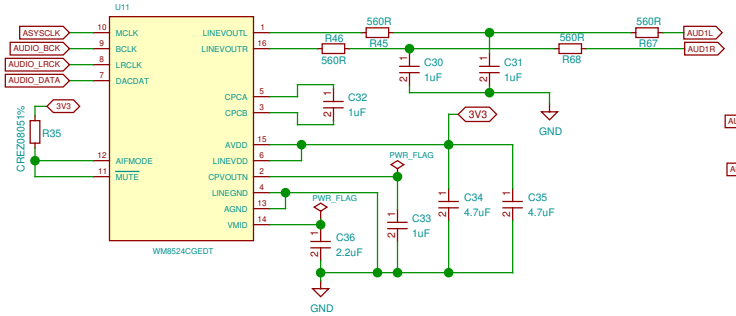

AUDIO 3.5mm OUTPUT




AUDIO SECTION


Gianluca Renzi
RetroBit Lab


Sheet: /Vera FPGA flash/
File: vera-fpga-flash.sch

Title: Vera FPGA flash

Size: A4	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 5/7

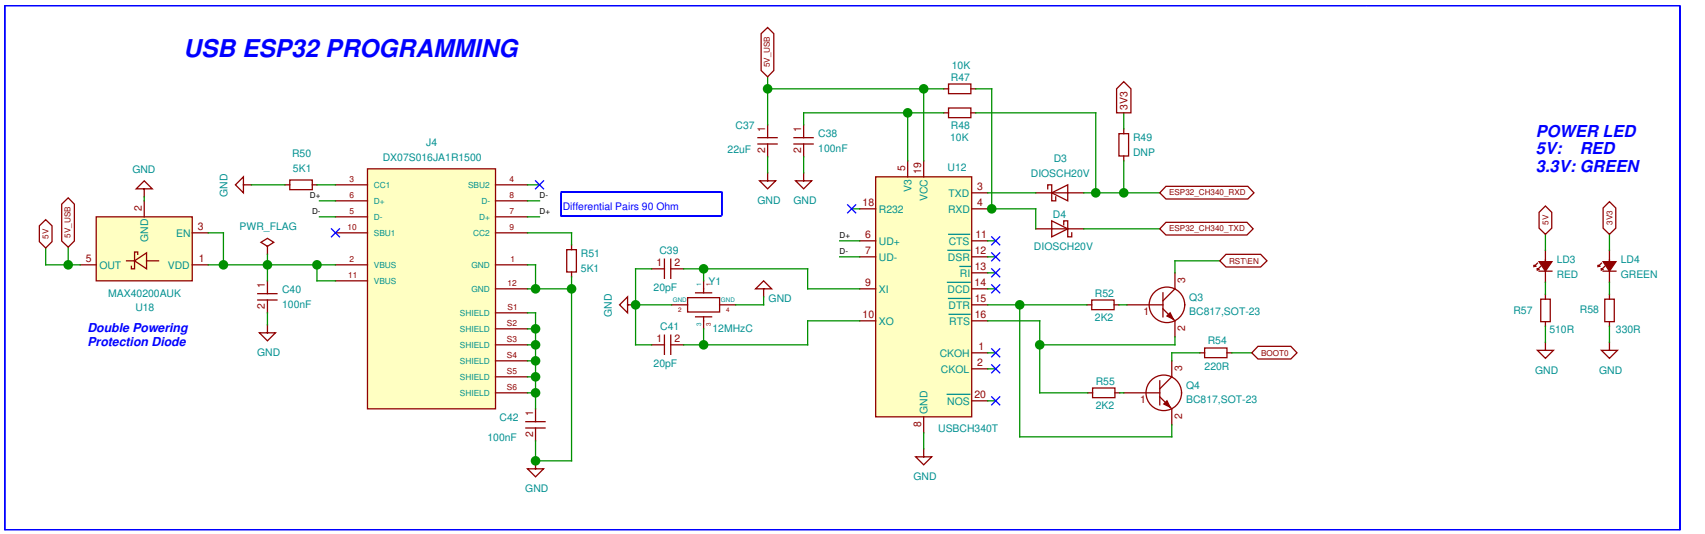

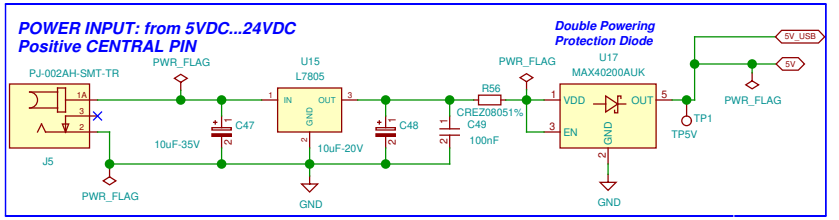

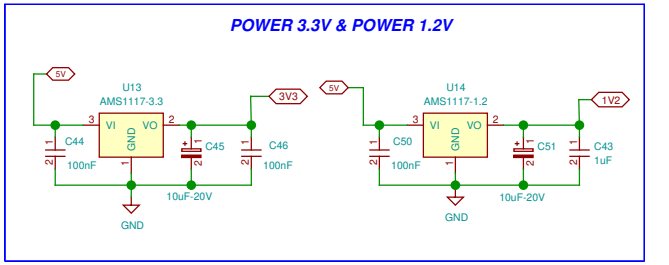


Gianluca Renzi
RetroBit Lab
Sheet: /PowerSupply/
File: powersupply.sch


Title: PowerSupply

Size: A4	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 6/7

ANALOG VGA SIGNALS

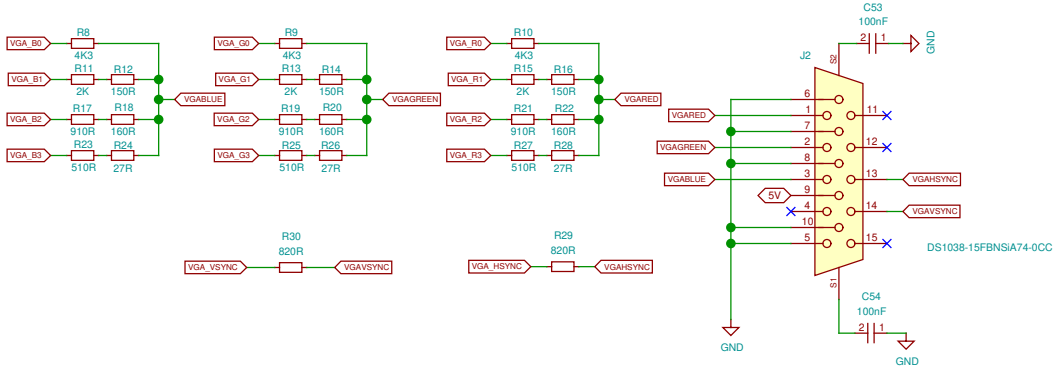

EXTERNAL VIDEO CONNECTOR



Gianluca Renzi		
RetroBit Lab		
Sheet: /VGA Analog/		
File: vga-analog.sch		
Title: VGA Analog		
Size: A4	Date: 2026-10-26	Rev: 1.0
Plotted by eeshow 3a954ac+ 20261031-02:24Z		Id: 7/7