

# De-Mystifying Reduced-Order St. Venant-Kirchhoff Deformable Models

Gillian P. Reyes

*The goal of this paper is to document each step taken in recreating the results of Real-Time Subspace Integration for St. Venant-Kirchhoff Deformable Models [1], so that others may use this as a guide to replicate this work.*

## 1 Introduction

The goal of this paper is to document each step taken in recreating Barbič and James's research from their 2005 paper [1]. In this research, they utilize past work on real-time deformable objects and model reduction in solid mechanics to speed up computations and allow for large deformations. Finite Element Method is used to discretize partial differential equations of solid continuum mechanics, allowing motion to be described through the Euler-Lagrange equation,

$$M\ddot{u} + D(u, \dot{u}) + R(u) = f \quad (1)$$

where  $M \in \mathbb{R}^{2n \times 2n}$  is the mass matrix,  $D$  is the damping force,  $R$  is internal force, and  $f$  is external force.  $u \in \mathbb{R}^{2n}$  is the displacement vector. This equation is then further reduced by introducing a time-independent matrix,  $U \in \mathbb{R}^{2n \times r}$ , specifying a basis of some  $r$ -dimensional linear subspace. After this reduction, the equation and each of its terms can be solved using:

$$\tilde{M}\ddot{q} + \tilde{D}(q, \dot{q}) + \tilde{R}(q) = \tilde{f} \quad (2)$$

where  $q, \tilde{D}(q, \dot{q}), \tilde{R}(q), \tilde{f} \in \mathbb{R}^r$ ,  $\tilde{M} \in \mathbb{R}^{r \times r}$ , and each can be found through the equations:

$$u = Uq \quad (3)$$

$$\tilde{M} = U^T M U \quad (4)$$

$$\tilde{D}(q, \dot{q}) = U^T D(Uq, U\dot{q}) \quad (5)$$

$$\tilde{R}(q) = U^T R(Uq) \quad (6)$$

$$\tilde{f} = U^T f \quad (7)$$

$$\tilde{K} = U^T K(Uq)U \quad (8)$$

Using these equations to reduce the problem speeds up the computation of motion to a degree, but everything can be sped up further if you treat the calculation of  $R$  as cubic polynomial and  $K$  as a quadratic polynomial. Then, you can precompute constant coefficients to these equations, such that

$$\tilde{R}(q) = U^T R(q) = P^i q_i + Q^{ij} q_i q_j + S^{ijk} q_i q_j q_k \quad (9)$$

$$\tilde{K}(q) = \frac{\partial \tilde{R}(q)}{\partial q_i} = P^i + (Q^{li} + Q^{il}) q_i + (S^{ijl} + S^{ilj} + S^{lij}) q_i q_j \quad (10)$$

The reduced Euler-Lagrange equation of motion can then be solved using a Newmark integrator, animating large deformations of deformable models more efficiently than previously possible.

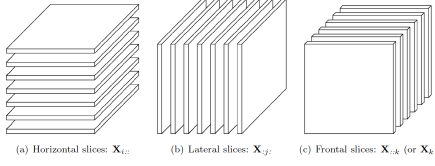


Fig. 1. Example taken from a paper that was held from production because the image quality is poor. ASME sets figures captions in 8pt, Helvetica Bold.

This paper will start from the very beginning of the process, i.e. creating triangle objects to form a triangle mesh for any specified model, and walk through every step until an actual animation is created at the end. OpenGL is used for drawing and displaying images, and C++ was used for the rest of the implementation.

## 2 An Overview of Tensors

Before going into the details of how to implement reduced-order St. Venant-Kirchhoff deformable models, it's important to review tensors, as they show up in many places throughout this paper. The following explanation is influenced by Kolda and Bader's paper on Tensor Decomposition and Applications [2], and contains extra findings that emerged through implementation.

A **tensor** is a multidimensional array. For example, a matrix is a second order tensor, and a vector is a first order tensor. An  $N$ th order tensor is an array of  $N$  dimensions, and thus indexed using  $N$  indices.

## 3 Creating the Triangles

When modelling solids using a discrete method, the model is represented by a mesh of polygons. In this paper, triangles were used, so all results of this paper are based on triangle calculations.

In the code for this paper, a triangle object was created for cleaner implementation. Important variables to keep track of are:

1. a vector of rest vertices. This should stay constant throughout the simulation.
2. a vector of actual positions, which update as the whole mesh moves.
3. a material model of some sort, to keep track of lambda and mu values for force calculations.
4. rest area; this is used in calculating the internal force and stiffness matrix.
5. precomputed coefficients for the cubic polynomial interpretation of internal force and quadratic polynomial for

the tangent stiffness matrix. This will be discussed in a later section.

In addition to storing variables, there are a few useful functions that can go into this object as well:

1. getter/setter functions for all private variables.
2. a function that computes  $\frac{\partial F}{\partial u}$ .
3. a function that computes the deformation gradient,  $F$ .
4. a function to compute the internal force for the triangle given the deformation gradient.
5. a function to compute the force jacobian for the triangle given the deformation gradient.

The last three functions are not necessary for the cubic polynomial approach, but are useful for debugging purposes. All terms used in this section will be explained in the following subsections, which will go into more details of implementation.

### 3.1 Computing the Deformation Gradient

When a solid is deformed, the **Deformation Gradient**,  $F \in \mathbb{R}^{2 \times 2}$ , is the linear mapping from a rest vertex to its deformed position (without translation). This mapping can be used in the calculation of strain energy, so it's an important value to calculate if the cubic polynomial approach is not being used.

The deformation gradient can be found using the equation:

$$F = D_s D_m^{-1} \quad (11)$$

Where  $D_s$  is the spatial matrix made of the deformed vertices, and  $D_m$  is the material matrix made of the rest vertices.

### 3.2 Implementing StVK

This section is not necessary for the cubic polynomial approach, but it's useful as a debugging tool. In the code for this paper, the implementation of StVK is tied to the material of the triangle, and is called by the functions that calculate internal force and the force jacobian for an individual triangle.

A St. Venant-Kirchhoff deformable model is defined by the StVK strain energy, where

$$\Psi = \mu \|F^T F - I\|^2 + \frac{\lambda}{2} \text{tr}(F^T F - I)^2 \quad (12)$$

, and  $\lambda$  and  $\mu$  are Lamé coefficients.

In computing the internal force of a single triangle, the Piola-Kirchhoff stress tensor

### 3.3 Computing $dF/dx$

An explanation of how to compute  $DF/Dx$ .

#### 3.3.1 Vectorizing Tensors

An explanation of how to vectorize a tensor, bringing the order down by one.

### 3.4 Computing Internal Force and the Force Jacobian (The Non-Polynomial Way)

#### 4 Creating the Triangle Mesh

An explanation of how to create a larger triangle mesh out of triangles. It is useful if this is its own object.

### 5 Implementing the Euler-Lagrange Equation of Motion

An explanation of how to create a larger triangle mesh out of triangles. It is useful if this is its own object.

#### 5.1 Implementing Internal Force

An explanation of how to implement internal force using the StVK set up. Can be skipped for now if you are planning on implementing the cubic polynomial approach, but useful for debugging.

#### 5.2 Implementing the Tangent Stiffness Matrix

An explanation of how to implement the tangent stiffness matrix using the StVK set up. Can be skipped for now if you are planning on implementing the cubic polynomial approach, but useful for debugging.

#### 5.3 Implementing the Mass Matrix

An explanation of how to implement the mass matrix.

#### 5.4 Implementing the Damping Matrix

An explanation of how to implement the damping matrix.

#### 5.5 Implementing the Newmark Integrator

An explanation of how to take a step in time.

### 6 Generating Precomputed Coefficients

An explanation of how to create precomputed coefficients for the cubic polynomial approach for the unreduced problem.

### 6.1 Coefficients for the Tangent Stiffness Matrix

An explanation of how to derive the coefficients for the tangent stiffness matrix equation.

#### 6.1.1 Constant Coefficient for the Tangent Stiffness Matrix

An explanation of how to derive the constant coefficient for the tangent stiffness matrix.

#### 6.1.2 Quadratic Coefficient for the Tangent Stiffness Matrix

An explanation of how to derive the quadratic coefficient for the tangent stiffness matrix.

#### 6.1.3 Creating the Global Tangent Stiffness Matrix Coefficients

An explanation of how to derive the global tangent stiffness matrix.

### 6.2 Coefficients for Internal Force

An explanation of how to derive the coefficients for the internal force equation.

#### 6.2.1 Linear Coefficient for Internal Force

An explanation of how to derive the linear coefficient for internal force.

#### 6.2.2 Cubic Coefficient for Internal Force

An explanation of how to derive the cubic coefficient for internal force.

#### 6.2.3 Creating the Global Internal Force Coefficients

An explanation of how to derive the global internal force.

### 7 Generating a Deformation Basis

An explanation of how to generate a deformation basis.

### 8 Reducing the Euler-Lagrange Equation of Motion

An explanation of how to push  $U$  through so that we can reduce the order of our calculations.

#### 8.1 Reducing the Internal Force

An explanation of how to reduce the calculation of the internal forces, changing the coefficients of the polynomial.

## 8.2 Reducing the Global Tangent Stiffness Matrix

An explanation of how to reduce the calculation of the stiffness, changing the coefficients of the polynomial.

## 8.3 Reducing All Other Forces

An explanation of how to reduce all other forces.

## 9 Running the program

A brief explanation of how to run the program

## 10 Conclusions

End it by explaining how I hope this helps anyone who wants to try implementing this on their own. Explain how this can probably be optimized further by flattening all tensors.

## Acknowledgements

Thanks to Barbič for writing the paper and my advisor Theodore Kim.

## References

- [1] Barbic, J., and James, D., 2005. “Real-time subspace integration for st. venant-kirchhoff deformable models”. *ACM Trans. on Graphics*, **23**(3), Aug, pp. 982–990.
- [2] Kolda, T., and Bader, B., 2009. “Tensor decompositions and applications”. *SIAM Review*, **51**(3), Aug, pp. 455–500.