

**The University of Texas at Tyler  
College of Engineering and Computer Science  
Tyler, TX 75799**

**Final Design Report Draft #2  
For  
Wireless Charger Project**

**A design project to fulfill the requirements of Senior Design  
in the Department of Electrical Engineering  
at The University of Texas at Tyler**

The individuals whose names and signatures appear below certify that the narrative, diagrams, figures, tables, calculations, and analyses contained within this document are their original work except as otherwise cited.

<u>Flory, David</u>	<hr/> Signature	<u>March 1, 2021</u> Date
<u>França, Natasha</u>	<hr/> Signature	<u>March 1, 2021</u> Date
<u>Franulovic, Franci</u>	<hr/> Signature	<u>March 1, 2021</u> Date
<u>Gibbons, Chad</u>	<hr/> Signature	<u>March 1, 2021</u> Date
<u>Sosa, Francisco</u>	<hr/> Signature	<u>March 1, 2021</u> Date

## ACKNOWLEDGMENTS

We as a team wish to thank Indus Instruments and Dr. Sridhar Madala for being the benefactors and sponsors of our Project. Indus Instruments develops and creates electronic devices and software to meet the needs of various industries; for instance, they provide Baylor College of Medicine critical equipment for medical research. Dr. Sridhar Madala has been generous with our time and was critical in the initial planning phase of the project. Dr. Madala's familiarity with FCC and international wireless transmission regulations gave clear constraints and direction to this project. Thus, we especially thank Dr. Sridhar Madala for agreeing to be HEC-2's technical advisor.

## EXECUTIVE SUMMARY

The team has designed and is prototyping a managed, 30 watt wireless resonant charger for use with lithium-ion battery packs. It shall be a versatile solution to the problem of powering autonomous mobile devices fitted with moderately sized battery packs of approximately four to six 18650 cells configured for 7.4 to 14.7 volts nominal output. With an estimated cost around \$300, it fills a gap between inexpensive inductive chargers in the 5 watt range and custom 90 watt robotic power systems that have an entry level price of \$2000.

Our charging system is made with two essential components: a transmitter and receiver. The transmitter is supplied by standard line voltage and will be responsible for safely delivering up to 30 watts of resonant power to the receiver when in range and appropriately positioned. It shall communicate status with the receiver over a Bluetooth link and shall enable or disable power transmission when requested.

The receiver shall communicate with the transmitter and to a user GUI over Bluetooth links, and optionally with the user's own application (i.e. a robot microcontroller) over a serial link. It will be capable of delivering requested power transmission and charging status information and beginning or ending the charging process. It shall cease charging on receipt of an error status from the charging circuit and will notify the user to take corrective action. Under normal conditions it will deliver power to the charging control IC, which shall charge the attached battery pack.

The charger may be configured to charge 7.4 to 14.7 nominal Li-Ion battery cells, which must have internal protection circuitry in accordance with UL1642 and IEC61960. Optimal configurations would include a 7.4V pack rated for 3.2A charging, a 11.1V pack rated for 2.2A charging, or a 14.8V pack rated for 1.7A charging.

To best demonstrate the full potential of our project, the team is pursuing optional deliverables that should be completed if time permits once the core project is completed. These stretch goals include a mobile robot capable of charging itself for continuous wireless operation and integration with a smart Li-ion battery for detailed fuel gauge and battery health status.

# Contents

<b>I</b>	<b>Project Description</b>	<b>1</b>
I.A	Software Team's Focus for Project . . . . .	2
I.B	Hardware Team's Focus for Project . . . . .	3
<b>II</b>	<b>Final Design Specifications</b>	<b>4</b>
II.A	Feasibility Study . . . . .	6
II.B	Microcontroller . . . . .	7
II.C	Transmitter Coil . . . . .	7
II.D	Transmitter . . . . .	7
II.E	Receiver . . . . .	8
II.F	Thermal Considerations for 3.3V and 5V Voltage Regulators . . . . .	9
II.G	Charging Subsystem . . . . .	11
II.H	Battery Considerations . . . . .	11
II.I	Microcontroller Considerations . . . . .	13
II.J	Firmware Requirements: Transmitter . . . . .	14
II.K	Firmware Requirements: Receiver . . . . .	14
II.L	Software Requirements: GUI . . . . .	15
II.M	Coil Considerations . . . . .	16
II.N	Specification Summary . . . . .	17
II.O	Ethical and Professional Considerations . . . . .	18
II.1	Public Health: . . . . .	18
II.2	Safety and Welfare: . . . . .	18
II.3	Global Factors: . . . . .	19
II.4	Societal factors . . . . .	19
II.5	Environmental factors: . . . . .	19
II.6	Economic factors: . . . . .	19
<b>III</b>	<b>Design Solution</b>	<b>20</b>
III.A	Product Architecture . . . . .	20
III.B	Hardware Subsystems . . . . .	23
III.1	Transmitter Subsystem . . . . .	23
III.2	Receiver Subsystem . . . . .	27
III.3	Planar Coil Inductor . . . . .	30
III.C	Software Architecture . . . . .	31
III.1	Firmware Architecture . . . . .	31
III.2	GUI Software Architecture . . . . .	32
III.D	Software Modules . . . . .	33
III.1	Firmware Modules . . . . .	33
III.2	GUI Software Modules . . . . .	34
III.E	Hardware Off The Shelf Items . . . . .	36
III.F	Software Off The Shelf Items . . . . .	37
III.G	Schematics / Wiring Diagrams / Technical Drawings . . . . .	38
III.H	Custom Software . . . . .	38

III.1	Firmware Main Program . . . . .	38
III.2	GUI Software Main Program . . . . .	39
<b>IV</b>	<b>Prototype Design and Fabrication</b>	<b>40</b>
IV.A	Transmitter Subsystem Prototype Production . . . . .	40
IV.1	PCB Manufacturing . . . . .	40
IV.2	Transmitter Prototype Board Assembly . . . . .	41
IV.3	Post Assembly Inspection . . . . .	43
IV.B	Receiver Subsystem Prototype Production . . . . .	43
IV.1	PCB Manufacturing . . . . .	43
IV.2	Receiver Prototype Board Assembly . . . . .	44
IV.3	Post Assembly Inspection . . . . .	46
IV.C	Coil Production . . . . .	47
IV.D	Expenditure Report . . . . .	47
IV.E	Budget . . . . .	51
IV.F	Current Manufacturing Abilities . . . . .	52
<b>V</b>	<b>References</b>	<b>53</b>
<b>Appendices</b>		<b>54</b>
<b>A</b>	<b>Receiver PCB Schematics</b>	<b>55</b>
A.1	Receiver Controller . . . . .	56
A.2	Receiver Battery Charger . . . . .	57
A.3	RF/DC Converter . . . . .	58
A.4	DC/DC Converter . . . . .	59
A.5	Top Copper Layer . . . . .	60
A.6	Top Silk Layer . . . . .	61
<b>B</b>	<b>Transmitter PCB Schematics</b>	<b>62</b>
B.1	Transmitter Controller . . . . .	63
B.2	DC/DC Converter . . . . .	64
B.3	Coil Driver . . . . .	65
B.4	Top Copper Layer . . . . .	66
B.5	Top Silk Layer . . . . .	67
<b>C</b>	<b>Receiver BOM</b>	<b>68</b>
<b>D</b>	<b>Transmitter BOM</b>	<b>72</b>
<b>E</b>	<b>Wireless Power Transfer Module BOM</b>	<b>76</b>
<b>F</b>	<b>Dimensional Coil Drawing</b>	<b>77</b>
<b>G</b>	<b>GUI Wireframe Diagram</b>	<b>78</b>

# List of Figures

1	Operation Story Block Diagram . . . . .	2
2	Power Supply of Transmitter and Receiver Subsystems . . . . .	3
3	Transmitter and Receiver Block Diagrams . . . . .	3
4	Thermal Resistance vs. PCB Area [5] . . . . .	10
5	System Level Block Diagram . . . . .	21
6	GUI Wireframe Diagram . . . . .	22
7	Transmitter Subsystem Voltage Regulator . . . . .	23
8	Transmitter Subsystem Block Diagram . . . . .	24
9	Coil Driver Subcircuit . . . . .	25
10	SMPS Subcircuit . . . . .	26
11	Transmitter Subcircuit . . . . .	26
12	Receiver Subsystem Block Diagram . . . . .	27
13	Receiver Coil Subsystem Block Diagram . . . . .	28
14	Receiver Voltage Regulator . . . . .	28
15	Rectifier and Power Sensor Subcircuit . . . . .	29
16	Planar Coil CAD Drawing . . . . .	30
17	Controller Flow Chart . . . . .	31
18	High Level GUI Software Architecture Example . . . . .	32
19	Transmitter Top Silk Layer . . . . .	42
20	Transmitter Top Copper Layer . . . . .	42
21	Receiver Top Silk Layer . . . . .	45
22	Receiver Top Copper Layer . . . . .	46
23	Isometric Image of Receiver PCB . . . . .	55
24	Isometric Image of Transmitter PCB . . . . .	62
25	Dimensional Coil Drawing . . . . .	77
26	GUI Wireframe Diagram . . . . .	78

# List of Tables

1	Receiver Specifications . . . . .	4
2	Transmitter Specifications . . . . .	5
3	Communication Link Specifications . . . . .	5
4	GUI Specifications . . . . .	5
5	Final Design's Charging Subsystem Specifications . . . . .	13
6	Final Design's Coil Tubing Specifications . . . . .	16
7	Final Design's Receiver Coil Specifications . . . . .	16
8	Final Design's Receiver Specifications . . . . .	17
9	Final Design's Transmitter Specifications . . . . .	18
10	Final Design's Communication Link Specifications . . . . .	18
11	Final Design's GUI Specifications . . . . .	18
12	Ethical and Professional Considerations . . . . .	20
13	Off The Shelf Items Utilized in Prototype . . . . .	36
14	Off The Shelf Software Items . . . . .	37
15	Summary of Expenditures . . . . .	48
16	Man-Hours Expenditure Report in Development and Prototyping . . . . .	49
17	Development and Prototyping Summary of Man-Hours . . . . .	50
18	Development and Prototyping Budget . . . . .	51
19	Prototype Production Timetable . . . . .	52

## I. PROJECT DESCRIPTION

Our team noted a need for users to charge medium power devices via wireless charging. After further investigation we also determined that there is a shortage of cost effective medium power wireless chargers on the market.

Our project is a 30 watts nominal resonant wireless charger prototype for use with 4 to 6 cell lithium ion battery packs. It is managed by a microcontroller. It may be monitored and controlled by a user GUI or directly by the target application. Unlike existing customized and proprietary robotic charging systems, our product will charge a standard battery type and be suitable for both stand-alone operations and integration into the user's own design.

The team has been unable to discover any equivalent products to our own for retail. The most comparable product is Wibotic's Standard High Power System[1], a 90 watt magnetic resonance device that is marketed to businesses designing commercial drones and robotic systems. On the lower end, nearly all unbranded, low-cost wireless chargers that are available from mass online retailers supply no more than 5W via inductive charging. For a single industrial unit, we have received a price quote for approximately \$2000 USD. Individuals and small R&D teams that search for suitable devices through online retailers will find that these low-end transmitters are not modular and are limited to one specific purpose such as charging cell phones or key-fobs.

Our charging system employs magnetic resonance coupling to charge a lithium ion battery pack, delivering between 15 and 30 watts of power. The power transmitter and receiver communicates as a unified system that can provide battery management, protect against overcharging, and provide both diagnostic and telemetric information to the user and to an optional serial connection with the powered application's control circuitry. The charging system may be monitored and controlled by the user either through an attached LCD interface or a GUI from either a Bluetooth connected PC or smartphone.

This wireless charging alternative's intended market consists of hobbyists and prototype designers considering a self-docking direct electrical connection solution. This is the charging method used by the Roomba[2], which engages with a custom dock and charges using metal contacts. While this is a cost-effective solution for a mass-produced product, wireless charging is a superior choice for autonomous mobile devices that might have a wide variety of sizes and shapes. The benefits offered by our product's wireless charging include flexible placement of the charger, a compact charging area, greater tolerance for misalignment between the charger and the target device, and the absence of exposed electrical connections. Additionally, this product would solve the same need for OEM producers who are interested in a "turn-key" wireless charging solution.

To best demonstrate the full potential of our project, the team has specified optional deliverables that include a mobile robot capable of charging itself for continuous wireless operation, fully integrated with a smart Li-ion battery for detailed fuel gauge and battery health status.

The team holds that a moderate power, low cost wireless charger with accessible telemetry is useful to a small but important market of robotics hobbyists and developers, who at present, are not being served by either costly, proprietary business-to-business solutions or the low power and poorly documented inductive chargers available on the hobby market.

Below in Figure 1, the general flow of power from the AC to DC Wall Converter to the end user's device and information from the user is shown.

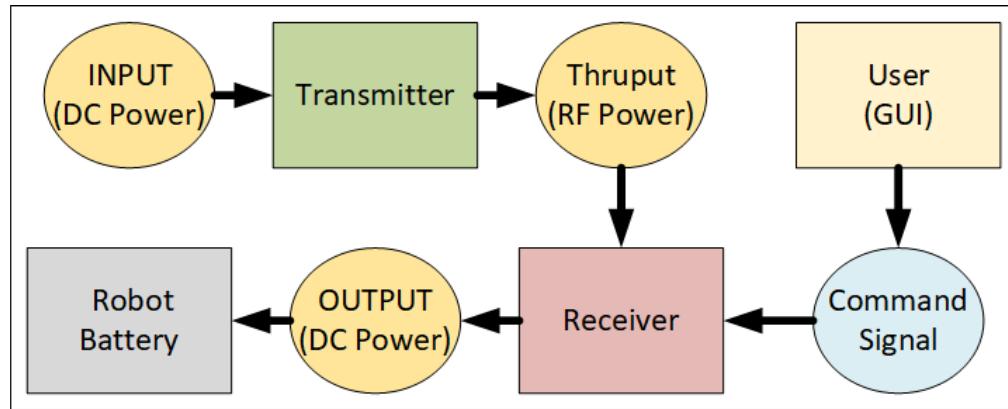


Figure 1: Operation Story Block Diagram

The project is divided between two teams: the hardware team and the software team.

#### A. Software Team's Focus for Project

The software team is focused on two programs: the microcontrollers' firmware and the graphical user interface (GUI) software application. The firmware operates the transmitter or receiver while the GUI allows for the user to readily monitor and interact throughout the charging process.

## B. Hardware Team's Focus for Project

The hardware team is focused on producing three modular components: the receiver PCB, the transmitter PCB, and the coil module. The image below displays how these modules operate together.

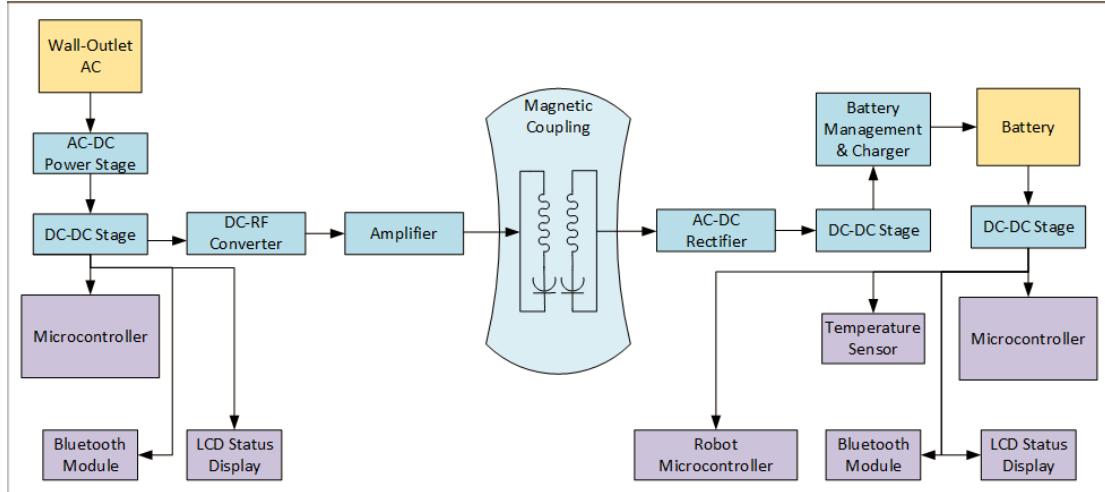


Figure 2: Power Supply of Transmitter and Receiver Subsystems

While the image below explicitly separates out the receiver and transmitter modules. Note that the completed PCB boards have a power transferring coil module affixed to them individually.

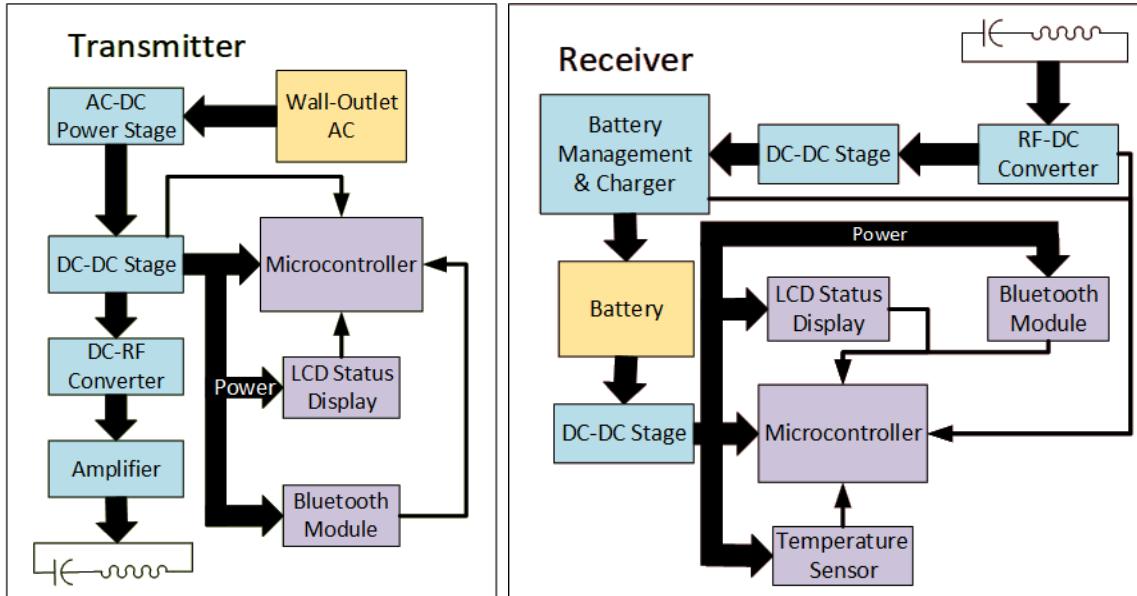


Figure 3: Transmitter and Receiver Block Diagrams

## II. FINAL DESIGN SPECIFICATIONS

Table 1 below shows the specs of the receiver subsystem.

Table 1: Receiver Specifications

Charge time (Per 4Ah Battery Packs)	5 Hours Max
Battery pack voltage	14.2 V
Coupling Efficiency Transmitter to Receiver	90%
AC-DC Conversion Efficiency	80%
Charging Controller DC-DC converter	85%
Overall Receiver Conversion Efficiency	61.2%
Maximum Battery Charging Current	1.25 A (14.7 V battery pack)
Charger Subsystem Charge Protocol	Constant Current Constant Voltage (Li-ION Battery)
Battery Type	Lithium-Ion (4 x18650 in Series or 2P4S Configuration)
Power Negotiation	Bluetooth 5 LE
Transmitter Locator Method	RF Localization [Bluetooth]
Deliverable Demo	Self-Moving Device (Robot)
Telemetry	Report State to GUI Device
LCD display	Diagnostic Character String Display

Table 2 below shows the specs of the transmitter subsystem.

Table 2: Transmitter Specifications

Operating frequency	13.56 MHz
RF power output	30 W
Max operating range	5 cm
DC Power supply	48 V 1.25 A max.
Conversion Efficiency DC-AC	80%
Telemetry	Report State to GUI Device

Table 3 below shows the communication specifications.

Table 3: Communication Link Specifications

Communication Medium	Bluetooth 5 LE
Protocol	L2CAP (RFCOMM)

Table 4 below shows the GUI software specifications.

Table 4: GUI Specifications

GUI OS	WinOS, IOS, Linux, & Android
License	LGPL 3.0
Software Architecture	Model-Controller- View (MCV) Architecture
Delivery Model	Open Source (Free App Download)

### *A. Feasibility Study*

The design consists of two subsystems: the transmitter and the receiver. This product is expected to be used by hobbyists and prototype designers for different applications that require contactless charging. There is no similar device available in the price range from \$200 to \$400. The expected cost of the charger system is \$300. There are some commercial chargers available right now and the cost of that system is \$2000. The price of \$300 per system will make wireless charging affordable for hobbyists and freelance hardware developers.

The design tools such as Altium designer and Multisim simulator are available free of charge to all group members using the provided UT Tyler license. Also, parts manufacturers are providing free simulation and evaluation tools for development. In addition to the software evaluation kits may be required for testing certain parts of the system such as the microcontroller, Bluetooth module, and the battery charger controller. Most of those evaluation modules are already purchased and they are available to team members. Evaluation kits are purchased by Indus Instruments.

The system is designed such that it uses standard components that are available at any electronic components store and they can be purchased without restrictions. PCB fabrication will be given to a company located in China that is offering quick turnaround PCB fabrication and fast shipping. Components purchasing and printed circuit board assembly will be done at Indus Instruments. Indus Instruments have all the necessary equipment that can handle surface mount components.

All test equipment required for development and testing will be available. Indus Instruments will provide space and necessary test equipment for the wireless charging system prototype evaluation and testing.

The final product cost is estimated at around \$300 (for small quantities). Most likely for larger quantities, it is possible to decrease the cost even more.

### *B. Microcontroller*

There are four aspects to analyze: economics, technical, legal, and scheduling. A single MSP430FR5994 part costs about \$3 to \$4, while the MSP-EXP430FR5994 LaunchPad kit costs \$16.99. Considering the team only needs two of these microcontrollers (one for the transmitter and one for the receiver), this is an economic and reasonable cost. [3] [4]. On the technical side, this microcontroller's memory, voltage supply limitations, UART and I2C mode specifications, and overall low power consumption makes it the ideal model for our project needs [3]. Some of the most important standards TI's MSP430FR5994 complies with include ANSI, JEDEC, and ESDA [3]. Lastly, the team already has in hands the LaunchPad kit for the microcontroller. The individual microcontrollers are also ready-to-purchase items with delivery times of less than 7 days. More testing will be done once the team has the first PCB design in hands.

### *C. Transmitter Coil*

The circular planar coil was the most inexpensive approach, the copper tubing to make the coils has an approximate value of \$15.99. The design properties also significantly contributed to reducing the complexity of acquiring the main coil parameters. It was important to take this factor into account because of the time constraint of two months. In order to reduce the complexity in our project, the spiral planar design was the best option.

The calculation of the inductance formula in the planar spiral design was easier to acquire than the other two proposed solutions. This was crucial because it significantly gave the project a higher chance of matching the predestined inductance of the circuit requirement of  $.909 \mu\text{H}$ .

The economical and ethical considerations did not affect our decision making as much, due to the fact that there were not many differences. Furthermore, this design was appropriate for our project and the team does have the budget, resources and time to successfully implement this design.

The planar spiral coil design allows the project to more reduces the complexity of the formulas implemented in the calculations.

### *D. Transmitter*

The transmitter class-E amplifier circuit was simulated at an efficiency of 98%. The actual transmitter efficiency would be around 90%. In the simulation, it was determined that the current required to power the class-E amplifier is 0.9 A at 30 V. The power for the transmitter will be supplied by using an external 48 V AC to DC converter followed by a step-down converter in the transmitter subsystem.

The main concern in this subsystem is the immunity of the supporting circuits to the RF electromagnetic field generated by the transmitter coil. The transmitter coil placement must be done such that the electromagnetic field has minimal effects on the electronic circuits in the transmitter. The transmitter sensitive electronic parts may require EMI shields.

During the simulation, the high voltage across the coil was observed. The highest voltage observed was 320 Vpp. That voltage poses a serious electric shock hazard. Therefore, the transmitter coil insulation must be capable of withstanding voltages that are in the 500V to 1kV range to provide a safety margin for the design. One way of achieving this is to make a plastic box that would contain the transmitter coil and have insulation that is capable of withstanding voltages in the 500 V to 1000 V range.

Heat dissipation in the Class E amplifier circuit is expected to be around 3W (based on the efficiency of 90%). That dissipation will occur in inductors, capacitors (due to ESR), and the amplifier transistor. The transistor will have a proper heatsink to prevent overheating. Since the dissipation in the transistor is very small (on-resistance is 50 mΩ) the proper thermal management will be achieved on the printed circuit board. Coils used in the transmitter will be designed such that the coil resistance is minimized which also will decrease the heat dissipation in the transmitter circuit.

#### *E. Receiver*

There is a possibility that the receiver RF to DC stage performs with higher losses than the losses that were determined in the simulation. According to the simulation data, the RF to DC conversion will be 81% efficient. In the system specification, the conversion efficiency is set to 80%. It is important to keep efficiency above 80% to prevent excessive heat generation. If received power is 25W and efficiency is 80% then power dissipation is 5 W.

The excessive heat may have adverse effects on battery life and the speed of charging [5]. A higher temperature environment requires lower charging currents to prevent further temperature rise and damage to the battery cells. Also, excessive heat generation must be minimized to avoid the use of fans and large heat-sinks. Heat-sinks and fans would increase the cost and the size of our product. If during the prototype test phase efficiency drops below 80% the circuit must be redesigned to achieve the target specification efficiency.

One problem that is likely to occur is the interference in the battery charging and communication link circuits caused by a strong electromagnetic field generated by the transmitter coil. Even though all good practices will be followed for the circuit board design the electromagnetic interference still may not be prevented. Charging circuit disruption can cause battery failure due to overcharging or overheating. If this problem occurs the additional EMI shielding will be required. The shielding includes placing metal boxes over sensitive electronic subcircuits and placing additional filters in series with DC power supplies for sensitive parts such as a microcontroller, Bluetooth module, and charger controller.

#### *F. Thermal Considerations for 3.3V and 5V Voltage Regulators*


According to the simulation data both parts have small power dissipation. The largest power dissipation is 0.18 W (5.0V regulator).

The graph below provides thermal resistance junction to ambient as a function of the printed circuit board. The equation below can be used to find the required thermal resistance junction to ambient ( $\Theta_{JA}$ ). The estimated ambient temperature in the transmitter is 45°C.

$$\Theta_{JA} = \frac{125^{\circ}C - T_{A(max)}}{P_{D(max)}} \left[ \frac{{}^{\circ}C}{W} \right] \quad (1)$$

$$\Theta_{JA} = \frac{125-45}{0.18} = 444.44 \left[ \frac{{}^{\circ}C}{W} \right]$$

The estimated transmitter PCB area will be around 100cm<sup>2</sup>. Given the board size and thermal resistance vs. board size, those regulators will have a proper heatsink.

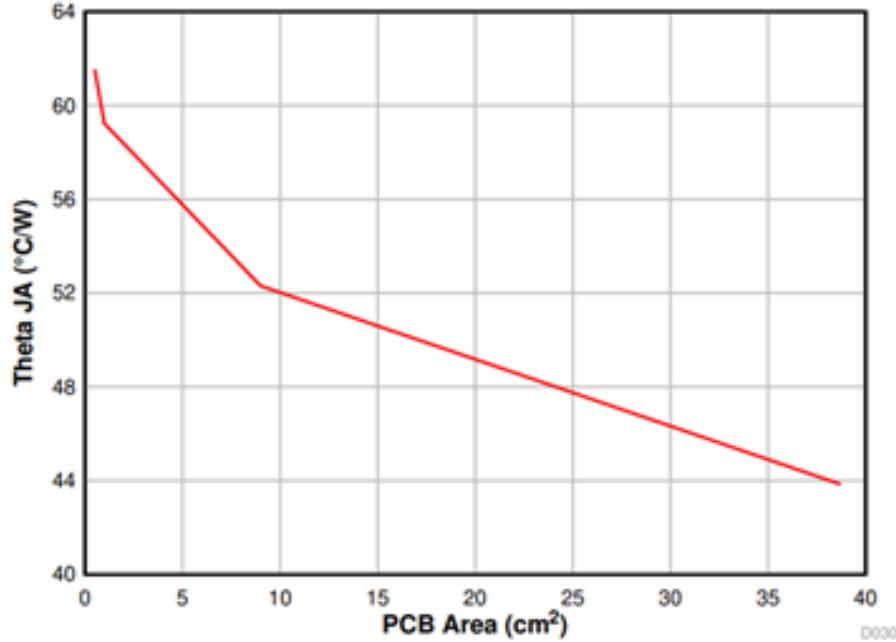

**Figure 35.  $\theta_{JA}$  versus PCB Area**

Figure 4: Thermal Resistance vs. PCB Area [5]

Thermal considerations(for class E amplifier voltage regulator (30V, 1.0A buck converter)

$$T_{A(max)} = T_{J(max)} - R_{TH} \cdot P_{TOT} \quad (2)$$

- $P_{TOT}$  is the total device power dissipation in [W]
- $T_A$  is the ambient temperature in [°C]
- $T_J$  is the junction temperature in [°C]
- $R_{TH}$  is the thermal resistance of the package  $\left[ \frac{^{\circ}C}{W} \right]$
- $T_{A(max)}$  is the maximum ambient temperature in [°C]
- $T_{J(max)}$  is the maximum junction temperature in [°C]

The expected ambient temperature is 40°C (that is temperature inside the transmitter enclosure).

Thermal resistance for a standard board ( $\Theta_{JA}$ ) is  $62.5 \left[ \frac{^{\circ}C}{W} \right]$  [6].

From the simulation the total power dissipation is 1 W.

From the recommended operating conditions the maximum junction temperature is 150°C [6].

Based on the data from the simulation and the datasheet the maximum ambient temperature can be determined

$$\begin{aligned} T_{A(MAX)} &= T_{J(MAX)} - R_{TH} * P_{TOT} \\ T_{A(MAX)} &= 150 - 62.5 * 1 = 87.5^{\circ}C \end{aligned}$$

The expected ambient temperature is lower than the maximum temperature calculated based on simulation data. Therefore, this part will operate within specified recommended conditions in the datasheet.

#### G. Charging Subsystem

The LTC4162-L is designed to manage a power path between an external input power source  $V_{in}$ , an output power  $V_{out}$ , and an installed battery pack. When external input power greater than the battery voltage is available at  $V_{in}$ , the LTC4162 will route  $V_{in}$  to  $V_{out}$  and charge the connected battery. If external power is interrupted or falls below  $V_{bat}$ , battery power will be automatically routed to  $V_{out}$ . As long as the battery has charge or a power source exists at  $V_{in}$ ,  $V_{out}$  will be supplied with power, but the voltage will range from  $V_{bat}$  to  $V_{in}$ . In order to provide consistent voltage to the target device output power should be drawn directly from the battery. Leaving  $V_{out}$  unused allows the maximum power point tracking feature to operate with optimal efficiency.

The LTC4162 draws power directly from  $V_{out}$  and has its own internal LDO linear regulators. All other components of the wireless receiver PCB must be powered by an appropriate DC-DC stage at  $V_{out}$  that can convert any potential input voltage (i.e. 7.4-35 V) to the required operating voltages of 5 V and 3.3 V. In the event that the battery is severely depleted and cannot power the microprocessor and Bluetooth interface, it will be necessary for the transmitter to be capable of initiating charging independently.

Since the LTC4162 has only an internal buck voltage regulator, the wireless power receiver subsystem must provide power to  $V_{in}$  that is higher than the voltage of the battery but below the maximum input voltage of 35V.

The LTC4162 approaches 95% efficiency at recommended switching frequency when the input voltage is no more than approximately 5V above battery charging voltage, and surpasses 90% in less ideal configurations. Heat losses will be in the range of three watts or less. It has a  $\Theta_{JC}$  of  $3.4 \left[ \frac{^{\circ}C}{W} \right]$  and will be soldered to a four-layer PCB. The team does not anticipate any thermal management issues with this circuit.

#### H. Battery Considerations

Li-Ion batteries offer superb performance and high energy density, but require special attention to safety. Under normal circumstances the LTC4162-L will monitor battery voltage and avoid overcharging. A NTC thermistor will allow the LTC4162 to monitor local charging temperatures and limit current in accordance with JEIDA recommendations.

For safety reasons, the team requires stricter battery specifications than originally planned. While our charger's thermistor can limit charging current in response to ambient temperature extremes, it cannot monitor individual cells—particularly if the battery pack is intended to be modular. While it can recognize and respond to abnormal battery voltages or short conditions, it cannot automatically determine maximum safe charging current. Any battery pack used must have a maximum charge current greater than the maximum current delivery of the charger. Battery packs must also meet UL1642 and IEC61960 standards and contain internal protection circuitry to limit charge and discharge currents and protect against thermal runaway.

The LTC4162 can deliver a maximum of 3.2 amps and has an efficiency of up to 95%. Assuming optimal efficiency and 26 W output from the wireless receiver, the charging voltage must be at least  $\frac{25W}{3.2A} = 7.8$  V in order to fully utilize the available power. Since the voltage of a typical Li-Ion cell is 3.7 V and the charging voltage is 4.2 V, the target battery pack should consist of two or more cells in series. The LTC4162 supports 1 to 8 cell series arrangements provided the input voltage is adequate. Optimal arrangements would include a 7.4V pack rated for 3.2 A charging, a 11.1 V pack rated for 2.2 A charging, or a 14.8 V pack rated for 1.7 A charging. The number of cells is set by selection pins and may be configured by a DIP switch or jumpers. It is not necessary to specify a specific number of cells for suitable battery packs, provided that they meet UL1642 and IEC61960 standards. The optimal balance of safe charging rates and performance will likely be found with packs utilizing six to eight 18650 cells or the equivalent. The power delivery estimates above are optimistic and actual power delivery from the charger may not reach these levels. As prototyping progresses, it will be possible to refine battery recommendations and expected charging times.

Ideally, up to 25 W will be delivered to the battery pack, making the battery the largest potential source of heat in our system. Since the battery pack is intended to be a modular, removable component with flexible specifications, it will not necessary for it to be enclosed with the wireless receiver PCB and receiving coil. It will be connected by an appropriate low-loss cable and connector, and exact placement will be determined by the user application. For this reason, the team has specified that only battery packs with internal temperature monitoring and protection circuitry should be used with this charger.

Our original specifications suggested that the charging subsystem would be capable of detailed monitoring of battery health and charge state. The team has learned that this type of information must be obtained at the individual cell level by a specialized controller which is usually integrated into the battery pack itself. Our charge subsystem can only recognize an approaching low-battery condition by a drop in voltage, and cannot estimate battery capacity except by calculation using charging voltage, charge times and currents, and such data would be of limited use considering battery aging and user-replaceability. It will be possible to notify the user and target device of a drop in battery voltage, but more detailed fuel gauge and battery health information will require an SMBus enabled smart battery. An I2C line on the MSP430FR5994 will be reserved for

communication with an optional SMBus capable smart battery pack. If feasible, optional battery pack telemetry may be polled by firmware and reported to the user along with the data already available from the LTC4162.

All the parts and design resources needed to complete the charging and power subsystem are readily available. Constructing this subsystem within the projected time-frame is feasible.

Table 5: Final Design's Charging Subsystem Specifications

DC-DC stage from wireless receiver to $V_{in}$	May not be necessary, pending further determination of wireless receiver output voltage
DC-DC stage from $V_{out}$	5V at 100mA; 3.3V at 100 mA
Battery Requirements	UL1642 and IEC61960 compliant Li-Ion packs with 7.4-15 $V_{DC}$ nominal output voltage
Maximum Charging Current	3.2A (7.4V); 2.2A (11.1V); 1.7A (14.8V)
Provision for optional smart battery health and fuel gauge monitoring	Reserved I2C line from MSP430FR5994 with buffering

### I. Microcontroller Considerations

The MSP430FR5994 has a body size that ranges from 6mm by 6mm to 12mm by 12mm depending on the package the group purchases, 8KB RAM, 68 GPIO pins, 4 I<sup>2</sup>C, 4 UART, up to four serial communication ports, and 20 ADC channels. The MSP430 series include limitations that range from safety to performance [3].

Relevant limitations to the project include:

1. ESD (Electrostatic discharge) ratings. For a human-body model, safe discharge ratings are around 500 V to 1000 V, while for a charged-device model, safe discharge ratings are around 250 V. These regulations are taken from JEDEC JS-001 and JESD22-C101 respectively [3].
2. Absolute maximum ratings: voltage applied to any pin must be within -0.3 V to 4.1 V, voltage difference between DVCC and AVCC pins must stay within -0.3 V to 0.3 V (if not, writing errors could occur to RAM and FRAM), and current at any device pin must have a maximum of -2 to 2 mA [3].
3. Supply voltage applied should be within 1.8 V to 3.6 V, maximum ACLK frequency should be 50 kHz, and maximum SMCLK frequency should be 16 MHz [3].

4. For the eUSCI I<sup>2</sup>C, eUSCI (enhanced universal serial communication interface) input clock frequency should not exceed 16 MHz, SCL clock frequency should not exceed 400 kHz [3].

#### *J. Firmware Requirements: Transmitter*

The Wireless Power Transmission Stage (Transmitter) will be controlled by an MSP430FR5994 running custom firmware. The firmware must meet the following requirements:

- 1.) Activate or deactivate wireless transmitter.
- 2.) Respond to commands received from a Bluetooth link with the Wireless Power Receiver Stage (Receiver), which may include requests for power delivery measurements or instructions to initiate or cease charging.
- 3.) Continuously monitor wireless power transmitter current and voltage and calculate delivered power.
- 4.) Automatically cease power transmission when the Receiver requests a shutdown or if severe interference is detected.
- 5.) Communicate operating status to the Receiver via Bluetooth, and directly to the user via fault LED's or an installed LCD.

#### *K. Firmware Requirements: Receiver*

The Wireless Power Receiver Stage (Receiver) will be controlled by an MSP430FR5994 running custom firmware. The firmware must meet the following requirements:

- 1.) Link to the Transmitter over Bluetooth.
- 2.) Link to user GUI device over Bluetooth.
- 3.) Link to an optional UART connection with the target device.
- 4.) Respond to queries or instructions from the Bluetooth connection to the user GUI or from the optional UART connection.
- 5.) Monitor charging state and battery status though I<sup>2</sup>C connection with LTC4162 and optional SMBus link with smart battery.
- 6.) Recognize low voltage state or optional low capacity battery warning and notify the user and target device.

- 7.) Signal the Transmitter via Bluetooth to initiate charging when instructed by the user or target device.
- 8.) Continuously monitor wireless power receiver current and voltage and calculate delivered power.
- 9.) Monitor reported power transmission from the Transmitter, compare it with received power, and recognize excessive power losses that could indicate unsafe interference conditions
- 10.) In the event of excessive transmission losses, instruct the Transmitter to cease power transmission. Notify the user and target device of the error condition.

The Transmitter and Receiver firmware will be developed with Texas Instruments Code Composer Studio. The team has suitable Launchpad development boards and access to all necessary documentation and libraries are available. The team is composed of multiple experienced programmers in our group. The firmware requirements are limited and well-defined and completing it within our scheduled time-frame is feasible.

#### *L. Software Requirements: GUI*

The GUI will be operated on multiple platforms and rely upon QT5 to operate. The software must fulfill the following requirements:

- 1.) Provide connection to transmitter and receiver for the product's user that grants sufficient control over the product's hardware
- 2.) Serve as a platform for custom messages to and from the user's device connected to the receiver.
- 3.) Provide alert system via push notifications and continuous monitoring of the transmitter and receiver.

### M. Coil Considerations

Table 6: Final Design's Coil Tubing Specifications

Material	122 Copper
Tube Size	1/8 [in]
Outer Diameter (OD)	1/4 [in]
Wall Thickness	0.049 [in]
Inner Diameter (ID)	0.152 [in]
Fabrication	Seamless
Bending Method	By hand
Temper Rating	Soft
Compatible Tube Fittings	Compression, Solder Connect
Specifications met	ASTM B75 RoHS 3(2015/863/EU) Compliant
Resistivity	$1.68 \times 10^{-8} [\Omega/m]$
Conductivity	$5.96 \times 10^7 [S/m]$

This tubing has good corrosion resistance and excellent heat transfer qualities. All tubing meets international standards for copper tubing. Important to note: Tube size is an accepted industry designation, not an actual size [7].

Table 7: Final Design's Receiver Coil Specifications

Outside Diameter of Coils (Do)	90 mm
Number of Turns	4
Length	729.6 mm
Spacing	4.81 mm
Width of Tubing	3.175 mm
Inner Diameter (Di)	26.12 mm
Winding Radius	29.03 mm
Radial Depth	31.94 mm
Inductance	909.66 nH.
Capacitance	150.55 pF
Frequency	13.6 MHz
Resistance (Dc)	1.5462 mΩ
Total Resistance	69.46 mΩ
Quality Factor	1119.09

## N. Specification Summary

Table 8: Final Design's Receiver Specifications

Charge time(4Ah Battery Pack)	5 Hours Max
Battery pack voltage	User Selectable: 7.4V-14.2 V
Coupling Efficiency Transmitter to Receiver	90%
AC-DC Conversion Efficiency	80%
Charging Controller DC-DC Converter	85%
Overall Receiver Conversion Efficiency	61.2%
Battery Requirements:	UL1642 and IEC61960 compliant Li-ion packs.
Maximum Battery Charging Current	3.2A (7.4V); 2.2A (11.1V); 1.7A (14.8V)
Charger Subsystem Charge Protocol	Constant Current Constant Voltage (Li-Ion Battery)
Battery Type	UL1642 and IEC61960 compliant Li-Ion packs; 7.4-15 VDC nominal output voltage.
Power Negotiation	Using Bluetooth 5 LE
Deliverables	Wireless resonant charger with approximately 30W power transmission capability. Stretch Goal: a mobile device to demonstrate autonomous charging.
Telemetry	Report State to GUI Device
LCD display	Diagnostic Data Character String Display

Table 9: Final Design's Transmitter Specifications

Operating Frequency	13.56 MHz
RF Power Output	30 W
Max. Charging Distance	30 cm
DC Power supply	48V 1.25A min.
Conversion Efficiency	80%
DC-AC	
Telemetry	Report State to Receiver

Table 10: Final Design's Communication Link Specifications

Communication Medium	Bluetooth 5 LE
Protocols	GUI: Host Controller Interface (HCI) Receiver-transmitter: Synchronous Connection-Oriented (SCO) link

Table 11: Final Design's GUI Specifications

OS	WinOS, IOS, Linux, & Android
License	LGPL 3.0
Software Architecture	Model-Controller-View (MCV) Architecture
Delivery Model	Open Source Free App Download

#### O. Ethical and Professional Considerations

1.) *Public Health:* Life preserving medical equipment requires concern in the transmission of powerful RF charging signals that may interfere with the medical equipment. We will adhere to FCC standards for intentional radiators and ensure that the charger transmitter does not exceed FDA guidelines for RF emission. Our design will be informed by the guidelines of the National Council on Radiation Protection and Measurements (NCRP) and the Institute of Electrical and Electronics Engineers (IEEE).

2.) *Safety and Welfare:* Our design may contribute to public safety and welfare by easing the development of robotic systems intended to handle hazardous materials, work in narrow spaces, high temperature environments, or in vacuum. We will follow industry best practices for safe charging, such as current limiting and temperature monitoring, to minimize the risk of battery failure.

*3.) Global Factors:* The pressures of governing bodies are to be taken into consideration in any choice this project takes; however, we are primarily concerned with the US governing bodies and then the EU bodies in order to streamline our development process to hit the largest market base possible. Additionally, Canadian and Mexican regulations would be considered as immediate market options.

In an alternate vein, there are sourcing questions that must be investigated before production in order to conform with international laws and prevent being banned from specific global markets whether at home or abroad.

*4.) Societal factors* The source code will be educational as well as providing value to the device itself. The design's modular intention will permit versatile implementations at work or at home. The product should serve influenceable groups such as teenagers, helping them enter STEM related fields.

The product as a whole should be considered in a way that would encourage further education in the classroom in physics. Likewise, the production of the product should foster a community between the product's programmers and engineers.

*5.) Environmental factors:* This concern requires continual attention for any anomalies concerning the battery cells. The device cannot account for all of these concerns, but should maintain labeling that makes the customer aware of such concerns that may be caused by their device. The project must provide a means of emergency shut off by some interrupt port that is always active. The operating robot, the user via a GUI, and the receiver itself must have this ability to turn off the charging feature of the receiver.

*6.) Economic factors:* The device could fulfill legal requirements for a client, and, in that case, a custom suite would be developed in the software at a premium to satisfy a client's needs. Additionally, creating a lightweight, low-cost production process is critical in maximizing profits. The open-source market also provides extensive free advertising momentum when capitalized successfully. Additionally, the product would assist in producing other products, especially in research and development.

Table 12: Ethical and Professional Considerations

Public Health	<ul style="list-style-type: none"> <li>· Medical Equipment RF Exposure</li> <li>· Electrical Shock</li> <li>· Chemical Exposure</li> </ul>
Safety and Wellness	<ul style="list-style-type: none"> <li>· RF Bandwidth Jamming</li> <li>· Electrical Shock</li> <li>· Chemical Exposure</li> </ul>
Global Factors	<ul style="list-style-type: none"> <li>· International Governing Bodies</li> <li>· Sourcing Restrictions</li> <li>· Inter-Market Penetrability</li> </ul>
Societal Factors	<ul style="list-style-type: none"> <li>· Open-Source Capitalization</li> <li>· STEM Educational Resources</li> <li>· Professional Organizations</li> <li>· Customer Privacy &amp; Security</li> </ul>
Environmental Factors	<ul style="list-style-type: none"> <li>· Chemical Pollution</li> <li>· User Environmental Awareness</li> <li>· Emergency Shut Off Cases</li> </ul>
Economic Factors	<ul style="list-style-type: none"> <li>· Open-Source Capitalization</li> <li>· Specialty Clientele</li> <li>· Rapid Agile-Deployment</li> <li>· Light-Weight Production</li> </ul>

### III. DESIGN SOLUTION

#### A. Product Architecture

The wireless charger system consists of two main subsystems, the receiver and the transmitter. The transmitter is powered by an external AC/DC 48 V power supply. The transmitter subsystem converts DC power into RF power to drive the transmitter coil. The transmitter has a microcontroller that communicates with the receiver and controls its wireless power transfer. The receiver has a receiving coil and capacitor that completes a 13.56 MHz parallel LC resonant circuit. The magnetic field generated by the transmitter induces an electric current in the receiving coil. The received power is rectified and transferred to the battery charger circuit. Also, the receiver has a microcontroller that communicates with the transmitter and indirectly controls transmitter circuits such as the wireless power transfer circuit. The receiver also communicates with remote devices such as tablets, phones, or computers to provide telemetry data.

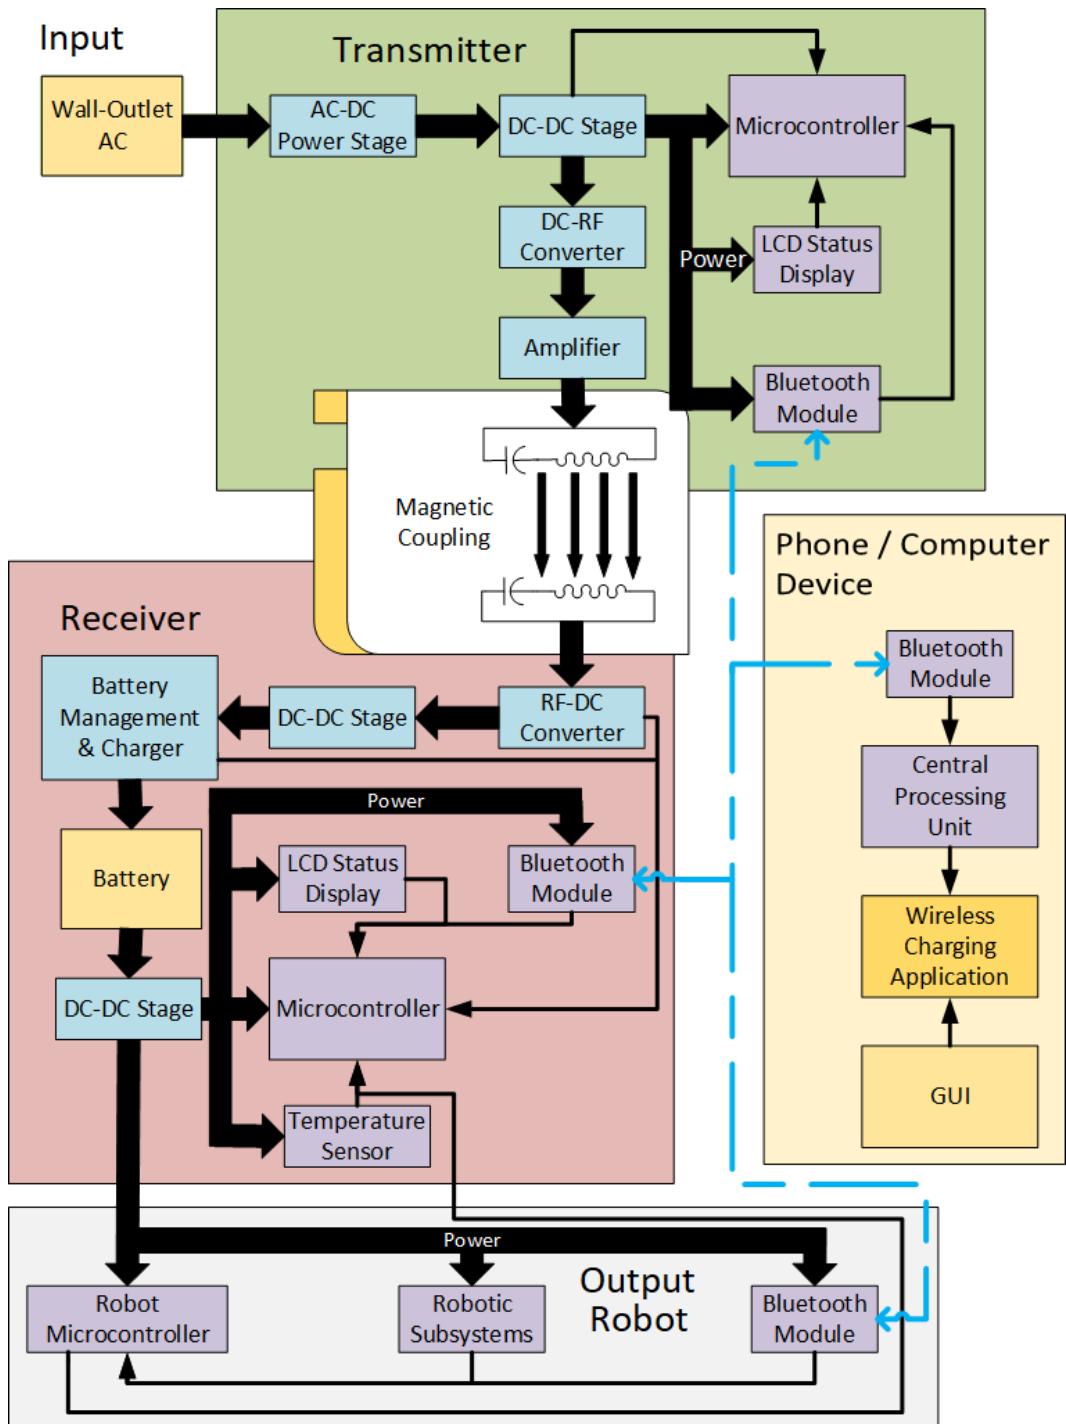


Figure 5: System Level Block Diagram

The graphical user interface (GUI) displays information with lists, data feeds, and visual aids that keep track of the battery's charge and any information passed along by the receiver to the user's remote device. The GUI's information on each device's connection and charging status allows real-time troubleshooting of each device.

The GUI Wireframe image below provides an example of how the GUI is structured. The selection widget shall be used to select between receiver devices to connect to. The top panel is reserved for battery monitoring. The Info panel utilizes wifi symbols to indicate connection status between devices while the lightning bolts reflect their on-going charging status. The bottom text panel is reserved for general warnings and information.

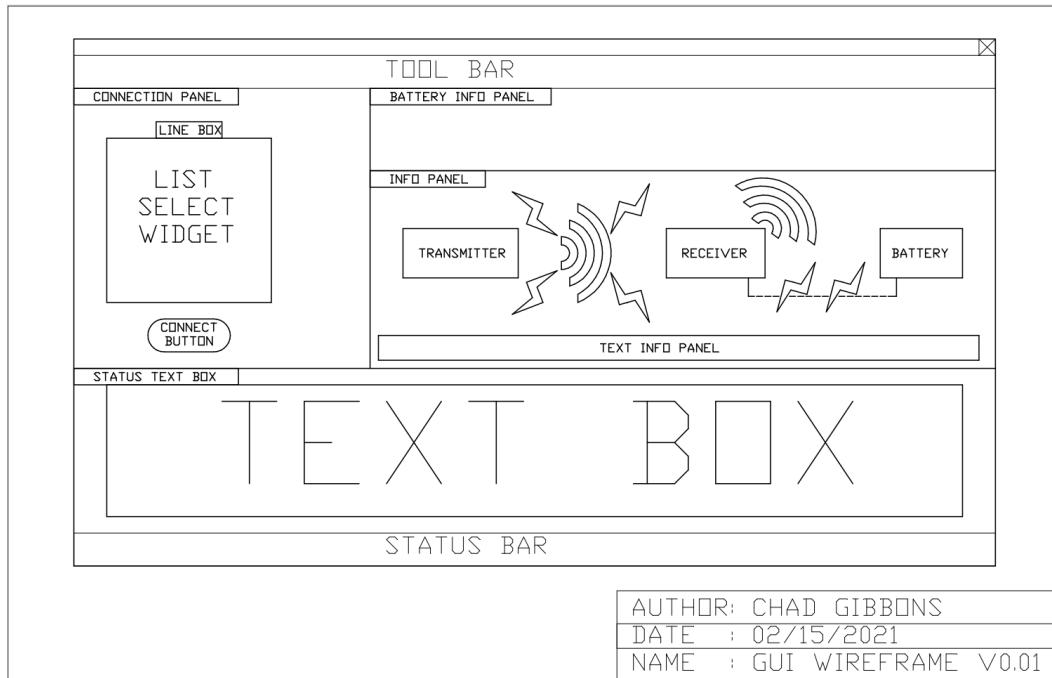


Figure 6: GUI Wireframe Diagram

## B. Hardware Subsystems

1.) *Transmitter Subsystem* The transmitter circuit requires a 48 V power supply that will be down-regulated to 30V, 5V, and 3.3V. 30V is used by a coil driver (class E amplifier). 5 V supply will be used for the LCD and class E amplifier buffer. 3.3V is used by digital circuits such as microcontroller and Bluetooth.

The block diagram below shows internal voltage regulator connections.

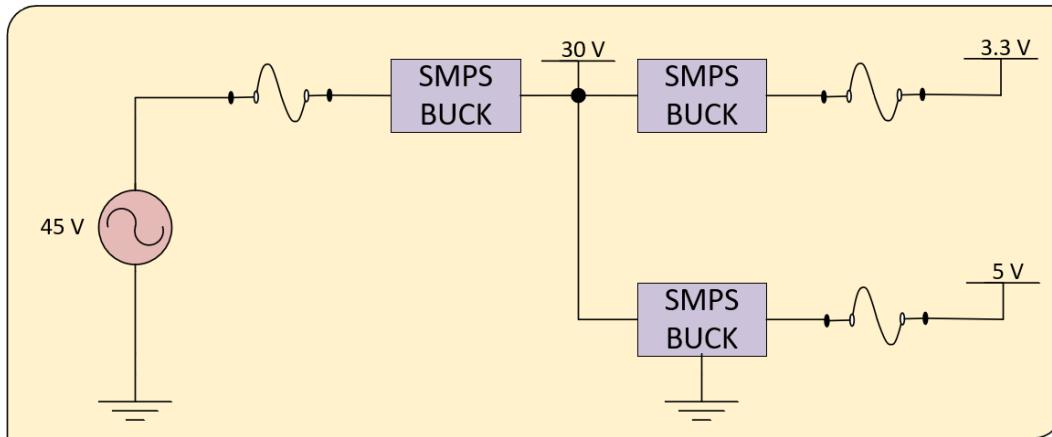


Figure 7: Transmitter Subsystem Voltage Regulator

The transmitter subsystem block diagram below illustrates how transmitter subcircuits interact with each other. The microcontroller is used to control most of the circuits in the transmitter subsystem. The Bluetooth module is connected to the microcontroller using the UART interface with flow control (RTS and CTS lines). The Bluetooth module is connected to the circuit that controls display contrast. The display parallel I/O interface is connected to the microcontroller through a level shifter. Also, the transmitter has four multipurpose user buttons that can be used to set the different modes of operations.

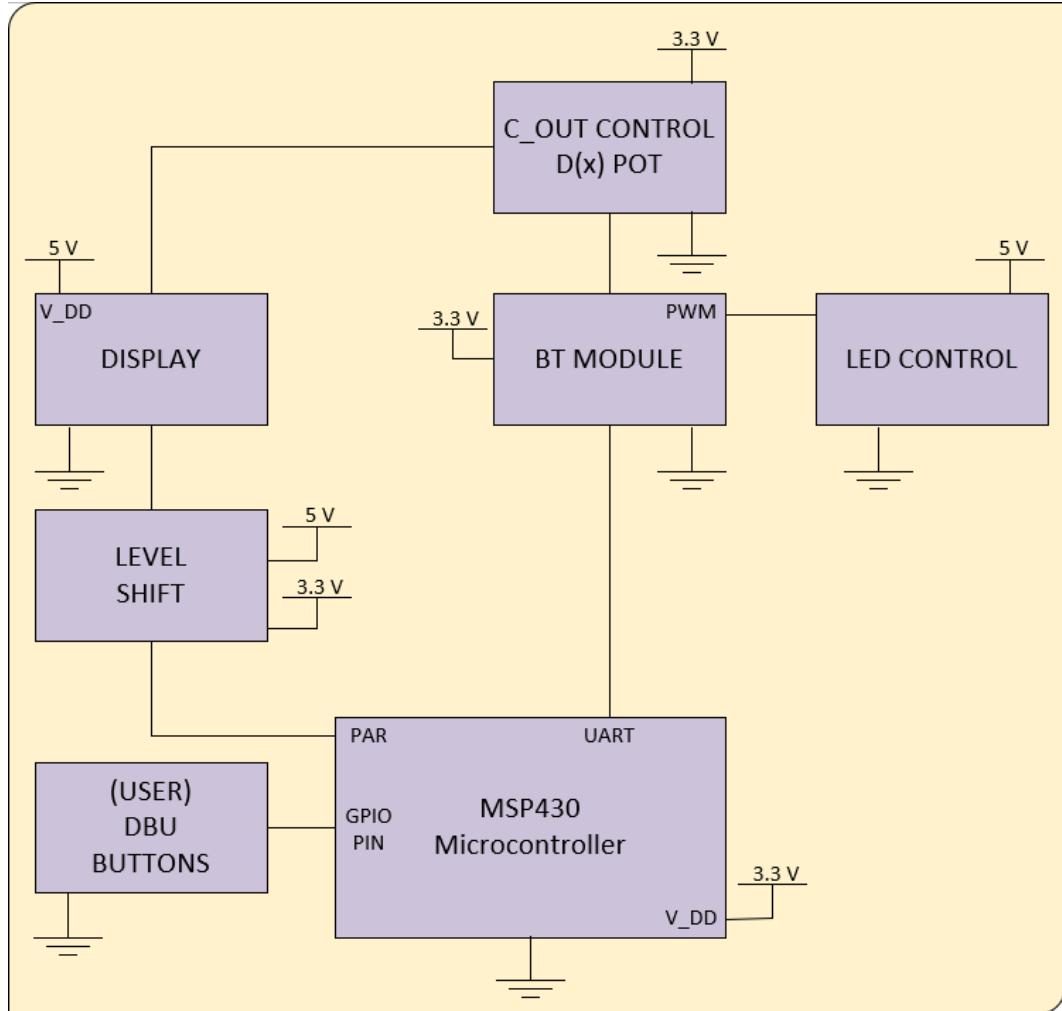


Figure 8: Transmitter Subsystem Block Diagram

The block diagram below illustrates the power transmission or DC to RF converter subcircuit. The subcircuit has an oscillator, buffer, and a coil driver. The 13.56 MHz signal is generated by a temperature-compensated crystal oscillator. The output of the oscillator is buffered using the GaN FET driver. A tuned switching power amplifier, also known as a Class E amplifier, is used to drive the transmitter coil where a GaN FET is used as a single-pole switching element. The transmitter coil and capacitors in series create the resonant LC circuit.

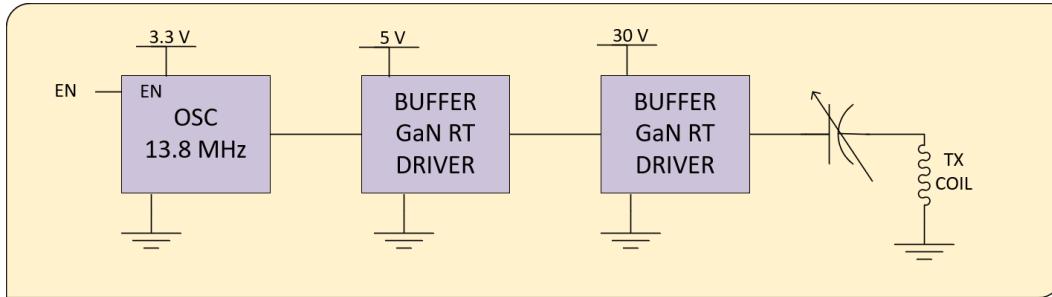


Figure 9: Coil Driver Subcircuit

The schematic diagram for the microcontroller (U2: MSP430FR5994), Bluetooth module (MD1 RN4870) display connector P3, the display illumination control (U5: MCP6001T-I/OT, U6: NUD3112LT1G), and LCD contrast control (U7: MCP4531-103E/MS) can be found in appendix NN.

The input power is supplied by an external AC/DC SMPS (Switched Mode Power Supply) converter. The power output of the buck SMPS is protected by a PPTC resettable fuse as short circuit protection. The fuse rating is 2.5A. A 48V power is converted to 30V which is used by the class E amplifier's 5V buck converter and 3.3V buck converter. Each SMPS module output has overcurrent protection using resettable PPTC fuses. Both fuses are 0.5A rated. Both low voltage regulators (5V and 3.3V) have additional filtering at their outputs using ferrite beads and 0.1  $\mu$ F capacitors.

Voltage regulators are shown below

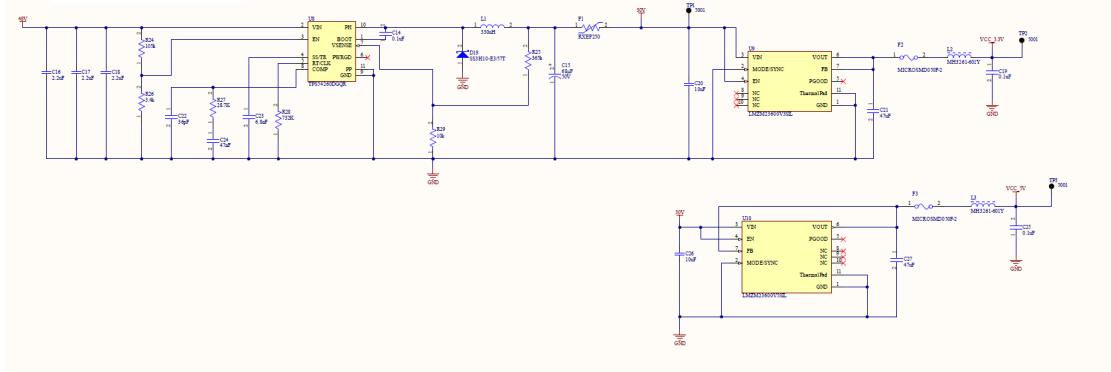


Figure 10: SMPS Subcircuit

The output of the temperature-compensated crystal oscillator (Y2) is connected to the GaN FET driver (U11: LM5112) which is connected to a GaN FET ( Q1: EPC2019). the output of the class E amplifier is connected to the transmitter coil. The amplifier circuit has a peak detector (R30, R35, D20, C36 and R36) to detect the peak voltages of its output. The voltage on the peak detector will be sampled using the microcontroller's ADC in order to validate the receiver's presence via loading effects on the coil.

The coil driver circuit is shown below

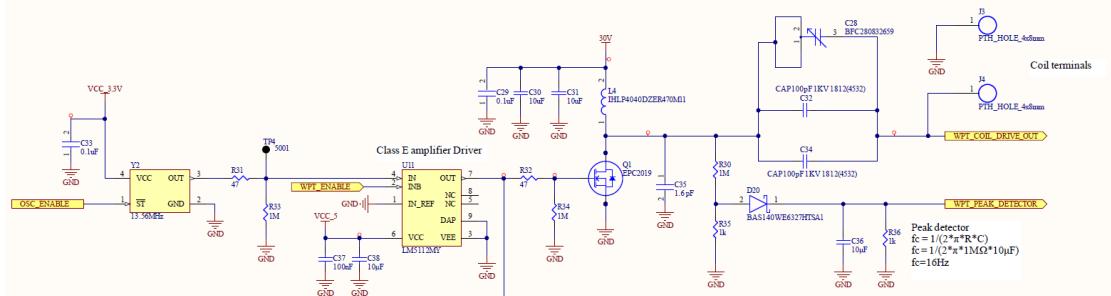


Figure 11: Transmitter Subcircuit

The transmitter subsystem function control and communication circuits schematic diagram shows the microcontroller (U2: MSP430FR5994), Bluetooth module (MD1 RN4870) display connector P5, the display illumination control (U5: MCP6001T-I/OT, U6: NUD3112LT1G), and LCD contrast control (U7: MCP4531-103E/MS). The schematic diagram can be found in appendix NN.

2.) *Receiver Subsystem* The main components in the receiver microcontroller subcircuit are identical to the transmitter microcontroller subcircuit.

The diagram below shows connections between receiver subcircuits.

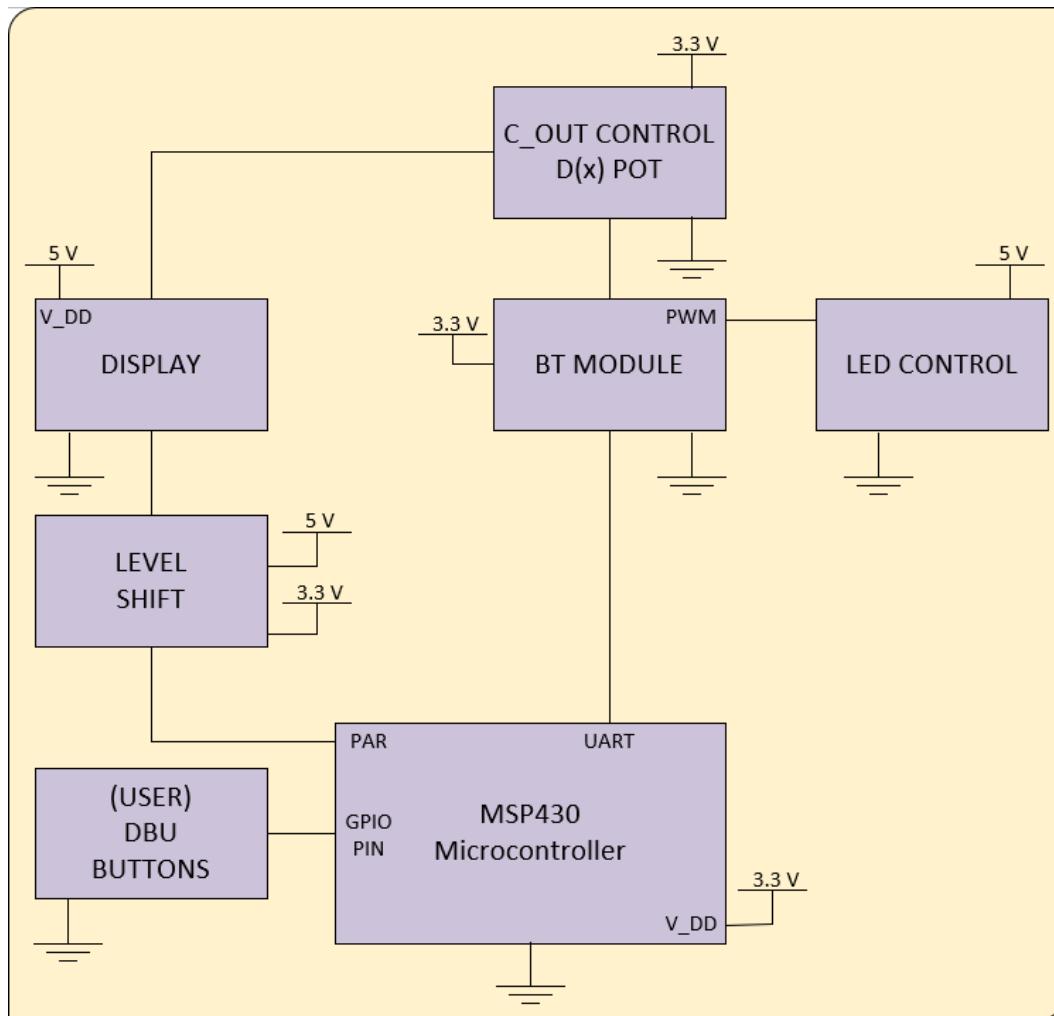


Figure 12: Receiver Subsystem Block Diagram

The receiver coil and parallel capacitor are acting as resonant tank circuit at a frequency of 13.56 MHz. The received power is rectified using a full wave rectifier bridge and then supplies to the battery charger circuit. The rectifier output voltage and current are constantly sampled by the microcontroller to determine instantaneous received power. The battery pack is connected to the charger for charging and the battery pack SMBus interface is connected to the microcontroller.

The diagram below shows the receiver's charging subcircuits.

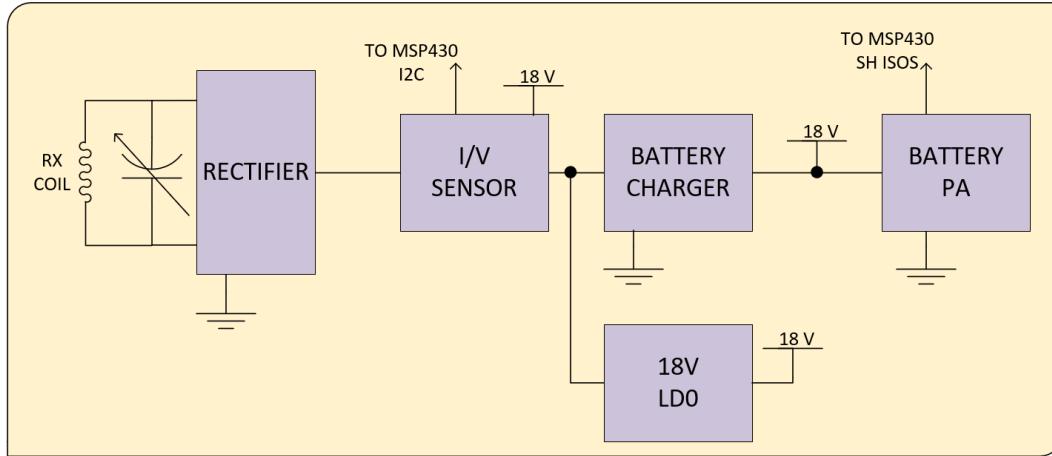


Figure 13: Receiver Coil Subsystem Block Diagram

The diagram below shows the voltage regulators utilized in powering the receiver's digital circuits and draws power from the battery pack directly.

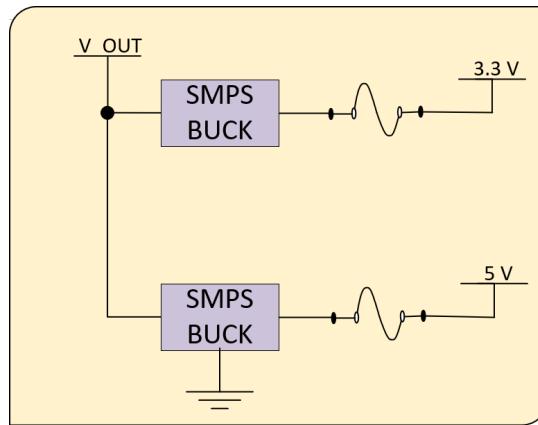


Figure 14: Receiver Voltage Regulator

On the receiver, battery management and power delivery functions are performed by the LTC4162-L monolithic charging controller. It handles many important battery testing and safety procedures automatically. Batteries are tested before charging, and should abnormal charging currents or voltages be detected the LTC4162-L will cease charging without firmware intervention. If conditions fall outside the preset limits a microcontroller interrupt may be triggered via the SMBALERT line for further error handling. The microcontroller firmware may read and change the LTC4162 status over an SMBus interface at any time.

A RRC smart battery will handle cell monitoring, balancing, and charging capacity measurement. It will automatically limit charge and discharge current to ensure safe functioning. Any one of a family of smart batteries may be connected to a keyed cable connector that ensures correct polarity and an SMBus connection. The SMBus interface will communicate with the microcontroller firmware to provide battery charge capacity and health information to the user.

Charger subcircuit is realized using LTC4162EUFD-SAD integrated circuit and may be found in Appendix A.2.

The power receiver subcircuit consists of the receiver coil, rectifier bridge, voltage sensor, and current sensor on the DC side of the circuit and feeds into the battery charging subcircuit. The rectifier bridge is designed using silicon carbide Schottky diodes.

DC Voltage detector and current sensor will be used to determine received power levels which can be used as an indication of transmitter-receiver inductive coupling. DC Voltage levels and current are sampled using the MSP430FR5994 AD converter.

The RF receiver rectifier and power sensor are shown below and can be found in larger print in Appendix A.3.

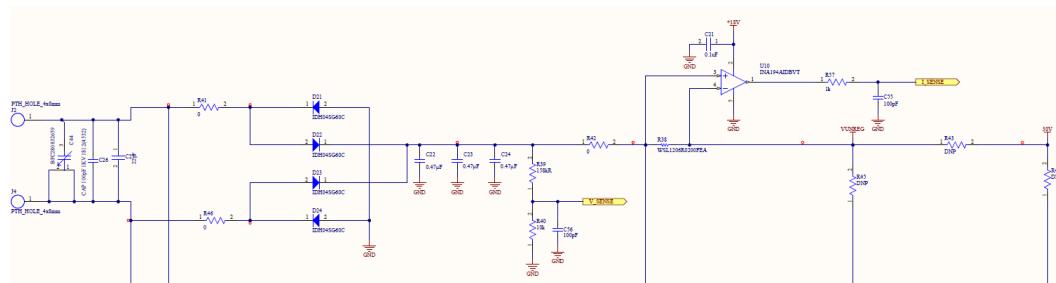


Figure 15: Rectifier and Power Sensor Subcircuit

3.) *Planar Coil Inductor* The transmitter and receiver utilize identical planar coils in the wireless power transfer process with an inductance of  $0.909 \mu\text{H}$ . The coils utilize copper tubing to reduce weight and costs.

The dimensions of the coil are shown below.

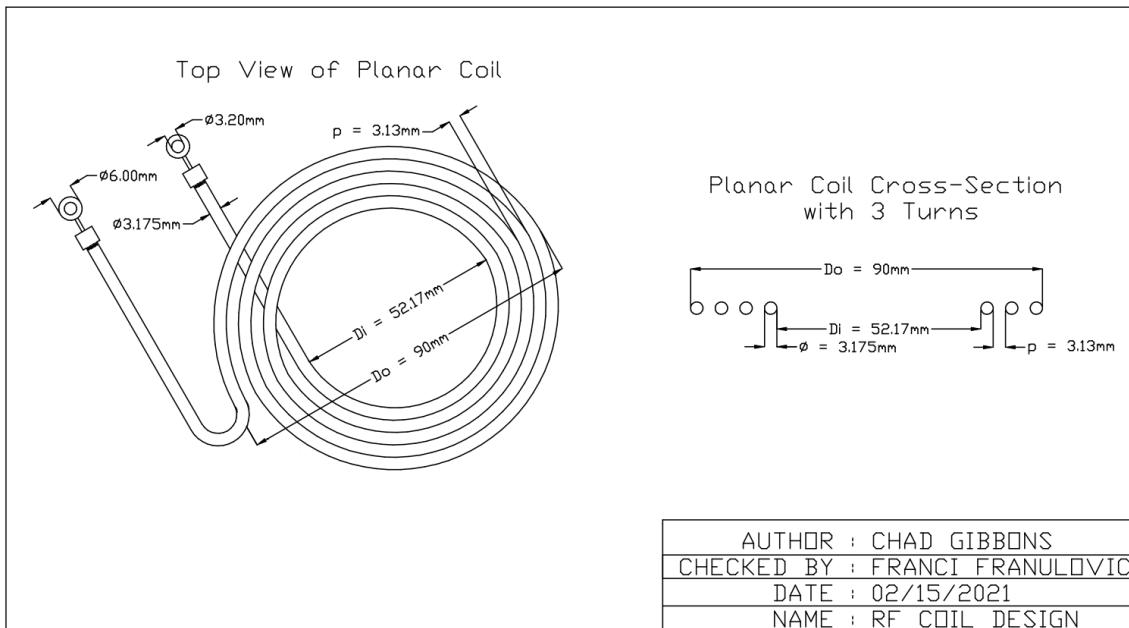


Figure 16: Planar Coil CAD Drawing

### C. Software Architecture

1.) *Firmware Architecture* The microcontrollers' firmware architecture is split into two general categories: core functionality that is required for the microcontroller to operate and utilities that handle specific tasks that the microcontrollers need to complete. The core functions primarily stem from interrupt calls and setup sequences. The util functions will communicate through the bluetooth, display information, and handle or monitor power transmission.

Below is an example of the firmware architecture.

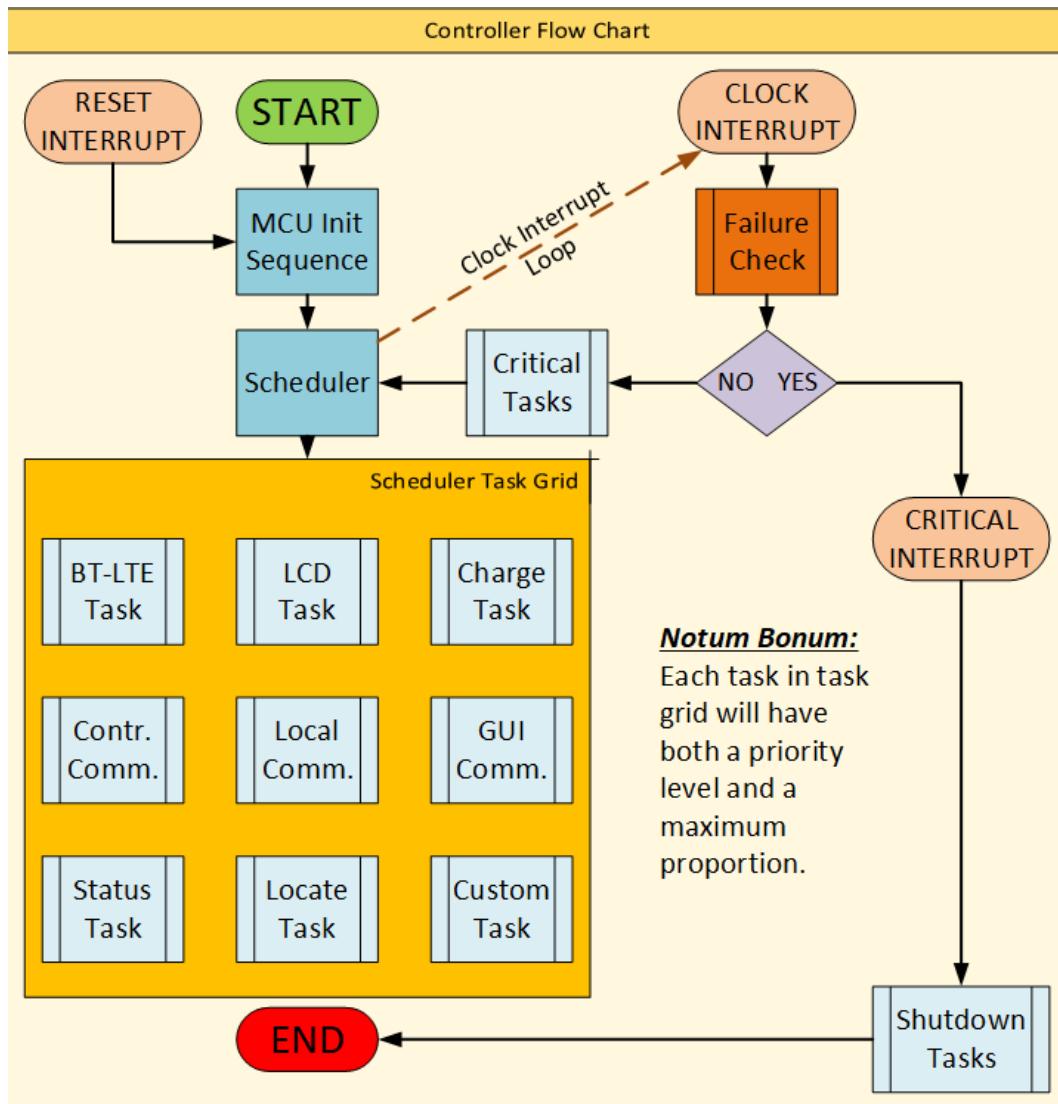


Figure 17: Controller Flow Chart

2.) *GUI Software Architecture* The GUI Software architecture is split into three general categories: Model, Controller, and View (MCV) components. Each general category is then subdivided into layers of functionality to maintain modularity. The Model is critical for handling data classes and storing data into files. The Controller is responsible for operating the visual components and model objects. The view category is utilized strictly for showing the graphical displays and are passive elements in the design's architecture.

The figure below shows the GUI 's Model-Controller-View (MCV) Architecture

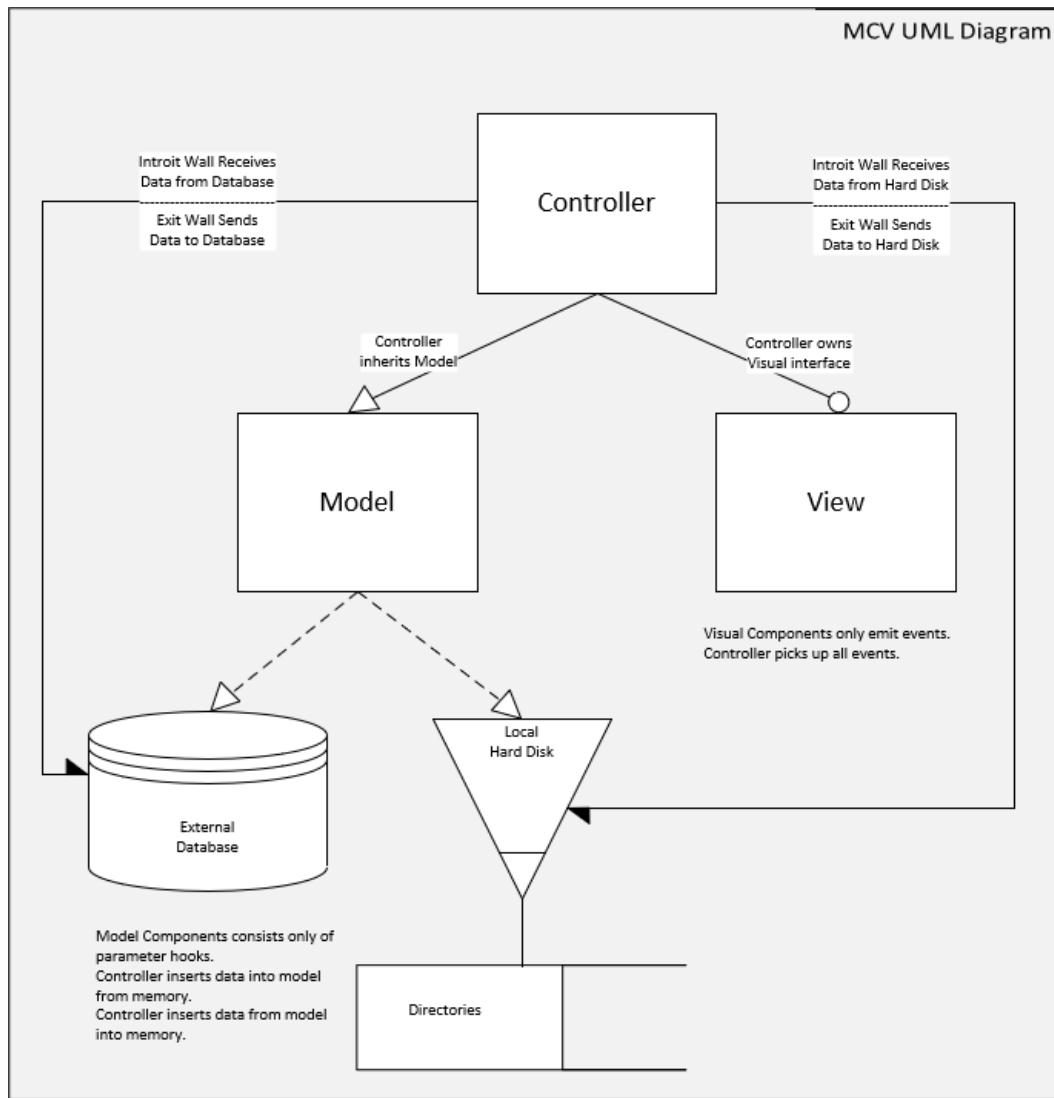


Figure 18: High Level GUI Software Architecture Example

## *D. Software Modules*

*1.) Firmware Modules Programmed on TI's Code Composer software and tested on TI's MSP430FR5994 Launchpad Kit*

\* = confer to both header and C files.

### **Microcontroller Setup**

**Location:** Firmware\{MSP430FR5994\_MCU\}\core\mcu\\_setup.\*

**Function:** Activates port settings and instantiates utility functions that operate the program.

### **Microcontroller Reset**

**Location:** Firmware\{MSP430FR5994\_MCU\}\core\mcu\\_reset.\*

**Function:** Resets microcontroller to initial setup configuration.

### **Task Queue Scheduler**

**Location:** Firmware\{MSP430FR5994\_MCU\}\util\Scheduler\scheduler.\*

**Function:** Creates and operates the scheduler method class that selects the next task to be run in the main loop based on task priorities.

### **Clock Interrupt**

**Location:** Firmware\{MSP430FR5994\_MCU\}\core\Interrupts\clock\\_interrupt.\*

**Function:** The code uses Timer A and SMCLK (1 MHz) to test clock interrupt. Once the program starts running, the timer counts up to 4 ticks to emit the clock interrupt signal every 250 ms period. Additionally, it instantiates utility functions considered critical to repeat frequently.

### **Button Interrupt**

**Location:** Firmware\{MSP430FR5994\_MCU\}\core\Interrupts\button\\_interrupt.\*

**Function:** Four buttons are set up within a port. The code sets up an interrupt service routine to run when a button is pushed, so that their respective function is called.

### **Pin Input Voltage Reader**

**Location:** Firmware\{MSP430FR5994\_MCU\}\core\Interrupts\pins.\*

**Function:** The function reads the analog 12 bit ADC input voltage at a port's pin.

### **Communication Transmission**

**Location:** Firmware\{MSP430FR5994\_MCU\}\util\Bluetooth\bluetooth\\_trans.\*

**Function:** The code permits the transmitter to communicate directly with the receiver. Alternatively, it permits the receiver to communicate with both the transmitter and a mobile device.

## **Communication Received**

**Location:** Firmware\ MSP430FR5994 MCU\ util\ Bluetooth\ bluetooth\_recv.\*

**Function:** The code facilitates the reception and reaction to bluetooth messages received.

## *2.) GUI Software Modules*

+++ = architecture layer ( Abstract - Base - Panel - Page - Window - App )

\* = confer to both header and C++ files

### **Controllers**

**Location:** Software\ controller\ +++\_controller.\*

**Function:** The doer or agent component of the program. Controllers allocate functions to particular events in the UI or manipulations to data models.

### **Widget Constructor**

**Location:** Software\ controller\ widget.setter.\*

**Function:** The factory class that is dedicated to building widgets in a panel with the proper hierarchy of inheritance in order to give the controller mediate control of all widgets.

### **Bluetooth Low Energy**

**Location:** Software\ core\ Bluetooth\ Protocols\ bt\_le.\*

**Function:** The concrete method class handling Qt5 Bluetooth classes.

### **App Initialization**

**Location:** Software\ core\ app.init.\*

**Function:** Configure all initial settings and ensure that the program is properly installed.

### **Models**

**Location:** Software\ model\ +++\_model.\*

**Function:** Data classes that can be pickled into compressed and encrypted binary data files. These models provide the stable memory of the application.

### **Canvas**

**Location:** Software\ ui\ CanvasTools\ +++\_canvas.\*

**Function:** Concrete instances of Qt5's QCanvas class for graphical displays of information.

### **Canvas Shapes**

**Location:** Software\ ui\ CanvasTools\ +++\_canvas\_shape.\*

**Function:** Individual images used as graphical displays of information and placed on their respective canvases.

## Panels

**Location:** Software\ui\Panels\\*\*\*\_panel.\*

**Function:** Concrete instances of movable panels used to hold widgets or canvases in GUI.

## Toolbar Tools

**Location:** Software\ui\ToolbarTools\win\_bar\_tools.\*

**Function:** Flushes out available toolbar icons and functions. Can also expand or limit drop down menu options at top of window.

## Widgets

**Location:** Software\ui\Widgets

**Function:** Too many individual modules to account for in this document. See GitHub repository [https://github.com/gibbs212521/HEC\\_2\\_senior\\_design](https://github.com/gibbs212521/HEC_2_senior_design) for further detail. These modules are Abstract-Concrete constructor classes that build their respective widgets with additional custom methods or attributes.

## Windows

**Location:** Software\ui\Windows\\*\*\*\_window.\*

**Function:** Abstract-Concrete constructor classes that permit the appearance of various types of windows in the application (restricted in tablet/cellphone device compilation).

## Power Monitor

**Location:** Software\util\power\_monitor.\*

**Function:** Method class that ascertains whether the transmitter is sending power currently or not. Collects additional ancillary charging data.

## Ticker Class

**Location:** Software\ui\Ticker\\*\*\*\_ticker.\*

**Function:** Collects or alters LCD ticker read out on the microcontroller.

## App Configurations

**Location:** Software\config.h

**Function:** Global variable module. Ideally this file remains blank.

## Application's Hidden Settings

**Location:** Software\.settings

**Function:** This file shall operate as a flat file to write or read current or most recent states in the application.

## Main Program

**Location:** Software\app.cpp

**Function:** The proverbial main.cpp that handles all dependencies of the application's program.

### E. Hardware Off The Shelf Items

The table below provides links and information on hardware incorporated in the post-production of the PCB. Further information can be found in the BOM Appendices in Appendix C, D, and E.

Table 13: Off The Shelf Items Utilized in Prototype

Description [Name]	Part Number	Link
Line Power Adapter: 65W 48V DC	DT62PW480D	<a href="https://product.tdk.com/en/search/power/switching-power/ac-dc-converter/info?part_no=DT62PW480D">https://product.tdk.com/en/search/power/switching-power/ac-dc-converter/info?part_no=DT62PW480D</a>
74.52 Wh Li-Ion Battery	RRC RRC2040-2	<a href="https://www.rrc-ps.com/en/battery-packs/standard-battery-packs/products/rrc2040-2/">https://www.rrc-ps.com/en/battery-packs/standard-battery-packs/products/rrc2040-2/</a>
LCD Display	NHD-0420DZ-FSW-FBW	<a href="https://www.newhavendisplay.com/specs/NHD-0420DZ-FSW-FBW.pdf">https://www.newhavendisplay.com/specs/NHD-0420DZ-FSW-FBW.pdf</a>

#### F. Software Off The Shelf Items

The table below includes all software used to develop hardware and the software for the wireless charger project.

Table 14: Off The Shelf Software Items

Name and Version	License Type	Restrictions	Link
National Instruments Multisim 14.1	Commercial	None	<a href="https://www.ni.com/en-us/shop/software/products/multisim.html">https://www.ni.com/en-us/shop/software/products/multisim.html</a>
Altium 21.0.9	Commercial	None	<a href="https://www.altium.com/">https://www.altium.com/</a>
Altium 365	Commercial	None	<a href="https://www.altium.com/altium-365">https://www.altium.com/altium-365</a>
Gerbv 2.6A	GPL 2.0	None	<a href="http://gerbv.geda-project.org/">http://gerbv.geda-project.org/</a>
Saturn PCB Design Inc. – PCB Toolkit ver.7.13	Commercial Freeware	None	<a href="https://saturnpcb.com/pcb_toolkit/">https://saturnpcb.com/pcb_toolkit/</a>
TI Code Composer	Commercial Freeware	None	<a href="https://www.ti.com/tool/CCSTUDIO">https://www.ti.com/tool/CCSTUDIO</a>
Qt5	LGPL 3	Code must be Open Source and Free to Download	<a href="https://doc.qt.io/qt-5/licensing.html">https://doc.qt.io/qt-5/licensing.html</a>
MS Visio	Personal License	No Corporate Use	<a href="https://www.microsoft.com/en-us/microsoft-365/visio-flowchart-software">https://www.microsoft.com/en-us/microsoft-365/visio-flowchart-software</a>
NanoCAD	Personal License	No Corporate Use	<a href="https://nanocad.com/products/nanoCAD/">https://nanocad.com/products/nanoCAD/</a>
GCC	GPL 2.0	None	<a href="https://nanocad.com/products/nanoCAD/">https://nanocad.com/products/nanoCAD/</a>

### *G. Schematics / Wiring Diagrams / Technical Drawings*

The schematics utilized can be found in appendices A and B with respect to the receiver, transmitter, and battery charger.

The coil design and GUI wireframe can be found in appendices F and G.

### *H. Custom Software*

All code is written modularly, to inspect functions or objects individually see repository of [https://github.com/ttgibbs212521/HEC\\_2\\_senior\\_design](https://github.com/ttgibbs212521/HEC_2_senior_design).

#### *1.) Firmware Main Program msp430\_proj.c*

```
#ifndef __MC_MSP430_H
#define __MC_MSP430_H
#include <msp430fr5994.h>
#endif
#include "util/Scheduler/scheduler.h"
#include "core/mcu_setup.h"
short main(){
    mc_setup(); // Setup Interrupts and Core Functions
    struct MCScheduler mc_scheduler; // Instantiate Scheduler Class Object
    buildScheduler(&mc_scheduler); // Build Out Scheduler
    mc_scheduler.run(&mc_scheduler); // Begin Utility Function Loop
    return 1; // Returns 1 since this point should never be reached
}
```

2.) GUI Software Main Program app.cpp

```
#include "Core\app_init.h"

int main(){
    AppController MotherController;
    MainWindow MainWin;
    AppModel PrimaryModel;
    MainWin.owner = &MotherController; // use only for signaling
    PrimaryModel.owner = &MotherController; // use only for signaling

    AppController.getSettings(); // collect stable memory in .settings file
    AppController.setModel(&PrimaryModel); // giving control over model
    AppController.setUI(&MainWin); // giving control over window ui
    // AppController.setChildrenControllers() // Currently only one page
    AppController runApp();
    return 0; // emits 0 on successful closure of application
}
```

## IV. PROTOTYPE DESIGN AND FABRICATION

### A. Transmitter Subsystem Prototype Production

1.) *PCB Manufacturing* The transmitter boards are manufactured at JLC PCB factory in China. The PCB specification shown below makes this board producible by many manufacturers because it does not require special manufacturing processes.

For the fabrication process, Altium PCB CAD software is used to generate board manufacturing files (Gerber X2).

Gerber files include the following files:

Transmitter_RevA_Copper_Signal_Top.gbr	TOP SIGNAL
Transmitter_RevA_Copper_Plane_1.gbr	GROUND PLANE
Transmitter_RevA_Copper_Signal_1.gbr	MID1 SIGNAL
Transmitter_RevA_Copper_Signal_Bot.gbr	BOTTOM SIGNAL
Transmitter_RevA_Soldermask_Top.gbr	TOP MASK
Transmitter_RevA_Soldermask_Bot.gbr	BOTTOM MASK
Transmitter_RevA_Legend_Top.gbr	TOP SILK
Transmitter_RevA_Legend_Bot.gbr	BOTTOM SILK
Transmitter_RevA_Paste_Top.gbr	TOP PASTE
Transmitter_RevA_Paste_Bot.gbr	BOTTOM PASTE

Reference Drill files

Transmitter_RevA_PTH_Drill.gbr	Plated through holes
Transmitter_RevA_NPTH_Drill.gbr	Non-plated through holes

NC DRILL

Transmitter_RevA-RoundHoles.TXT	N/C DRILL ROUND HOLES
Transmitter_RevA-SlotHoles.TXT	N/C DRILL SLOT HOLES

The transmitter boards are manufactured using the following specification:

Material: FR4 (135degC Tg) RoHS COMPLIANT

Board Thickness: 0.063"

Surface finish: Immersion Gold (Electroless Nickel Gold - ENIG)

Solder Mask Color: Green

Silkscreen Color: White

Min. Drill: 8 mils

Min. Line Width: 8 mils

Min. Spacing: 4 mils

The layers are stacked up as follows:

1. TOP SIGNAL
2. GROUND PLANE
3. MID1 SIGNAL
4. BOTTOM SIGNAL

The transmitter board size is 5.702 inches (144.821 mm) X 4.203 inches (106.76 mm).

*2.) Transmitter Prototype Board Assembly* The group plans to assemble two transmitter boards. Parts for two boards are ordered using part numbers and quantities specified in the bill of materials. Quantities for small parts such as resistors, capacitors, some diodes, and some transistors are rounded to the nearest hundred because of the price break.

The assembly is performed manually using solder paste stencil and manual surface mount component placement. The solder paste stencil is custom made and is manufactured in the same facility as the PCB. Soldering is performed using a reflow oven. Through-hole parts are added after reflow oven soldering and soldered using standard solder pencil. All materials used in the assembly process are RoHS compliant.

For manual PCB assembly the group must provide detailed drawings of the PCB with visible reference designators, the bill of materials (BOM) that includes components reference designators, component description, and part numbers.

Required assembly documentation for the transmitter subsystem includes the following documents:

1. PCB Top silk layer and top copper layer drawings (c.f. Appendix B)
2. Bill of materials (c.f. Appendix D)

The figure below shows the PCB Top silk layer.

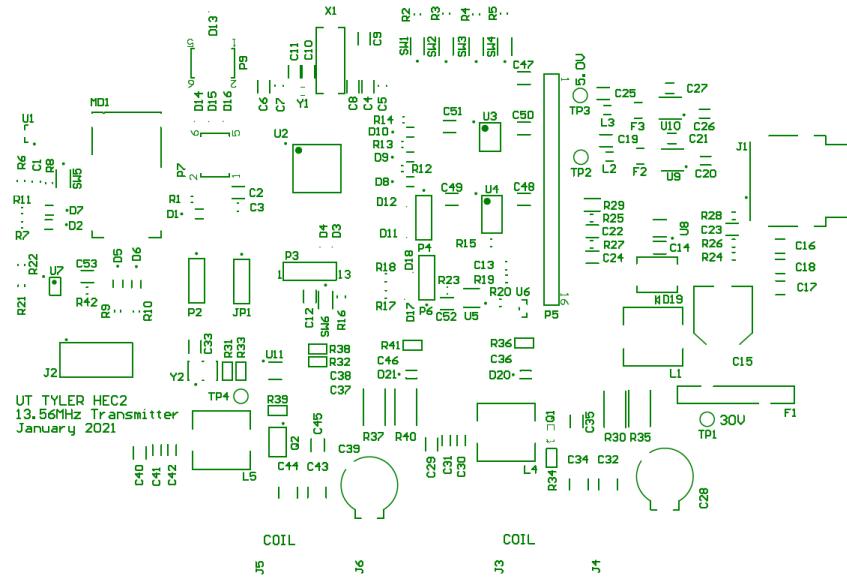


Figure 19: Transmitter Top Silk Layer

The figure below shows the PCB Top copper layer.

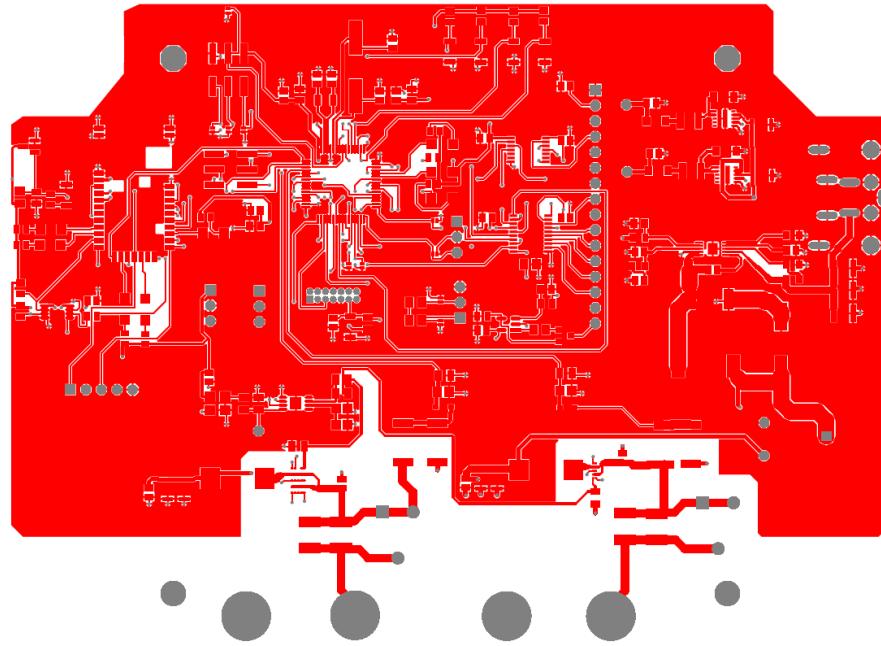


Figure 20: Transmitter Top Copper Layer

The assembly is performed by a professional worker. The assembly process consists of the following steps:

1. Solder paste printing on the PCB
2. Manual placement of surface mount components
3. Soldering using a reflow oven.
4. Through-hole soldering by hand using a solder iron pencil

All materials used in the assembly process are RoHS compliant. Also, all tools used in this process are standard tools used for the PCB assembly process.

*3.) Post Assembly Inspection* After the boards are assembled they must be inspected for solder quality and possible assembly errors. Components values such as resistance, capacitance, and part numbers must be compared against the BOM and the board drawing. Also, the inspection step includes component polarity and solder quality inspection. After this step, the transmitter boards are ready for electrical verification and tests.

The transmitter prototype design is intended to match the final hardware design. The enclosure selection may change depending on the thermal behavior of the transmitter subsystem. Also, the differences that may exist between the transmitter prototype and the final design solution are not known at this stage because the transmitter electronics performance and efficiency need to be validated. Depending on the test results the group may apply changes in the transmitter circuits.

### *B. Receiver Subsystem Prototype Production*

*1.) PCB Manufacturing* The receiver boards are manufactured at JLC PCB factory in China. The PCB specification shown below makes this board producible by many manufacturers because it does not require special manufacturing processes.

For the fabrication process, Altium PCB CAD software is used to generate board manufacturing files (Gerber X2).

Gerber files include the following files:

HEC2_Receiver_RevA_Copper_Signal_Top.gbr	TOP SIGNAL
HEC2_Receiver_RevA_Copper_Plane_1.gbr	GROUND PLANE
HEC2_Receiver_RevA_Copper_Signal_1.gbr	MID1 SIGNAL
HEC2_Receiver_RevA_Copper_Signal_Bot.gbr	BOTTOM SIGNAL
HEC2_Receiver_RevA_Soldermask_Top.gbr	TOP MASK
HEC2_Receiver_RevA_Soldermask_Bot.gbr	BOTTOM MASK
HEC2_Receiver_RevA_Legend_Top.gbr	TOP SILK
HEC2_Receiver_RevA_Legend_Bot.gbr	BOTTOM SILK
HEC2_Receiver_RevA_Paste_Top.gbr	TOP PASTE
HEC2_Receiver_RevA_Paste_Bot.gbr	BOTTOM PASTE

Reference Drill files	
HEC2_Receiver_RevA_PTH_Drill.gbr	Plated through holes
HEC2_Receiver_RevA_NPTH_Drill.gbr	Non-plated through holes

NC DRILL  
HEC2\_Receiver.TXT                  N/C DRILL ROUND HOLES

The receiver board is manufactured using the following specification:

Material: FR4 (135degC Tg) RoHS COMPLIANT  
 Board Thickness: 0.063"  
 Surface finish: Immersion Gold (Electroless Nickel Gold - ENIG)  
 Solder Mask Color: Green  
 Silkscreen Color: White  
 Min. Drill: 8 mils  
 Min. Line Width: 8 mils  
 Min. Spacing: 4 mils

The layers are stacked up as follows:

1. TOP SIGNAL
2. GROUND PLANE
3. MID1 SIGNAL
4. BOTTOM SIGNAL

The receiver board size is matching the enclosure recommended board dimensions.

The receiver prototype design is intended to match the final hardware design. The enclosure selection may change depending on the thermal behavior of the receiver subsystem. Also, the differences that may exist between the transmitter prototype and the final design solution are not known at this stage because the transmitter electronics performance and efficiency need to be validated and compared to the product specification. Depending on the test results the group may apply changes in the receiver circuits. The receiver board size is 5.702 inches (144.821 mm) X 4.203 inches (106.76 mm).

*2.) Receiver Prototype Board Assembly* The group plans to assemble two receiver boards. Parts for two boards are ordered using part numbers and quantities specified in the bill of materials. Quantities for small parts such as resistors, capacitors, some diodes, and some transistors are rounded to the nearest hundred because of the price break. The assembly is performed manually using solder paste stencil and manual surface mount component placement. The solder paste stencil is custom made and is manufactured in the same facility as the PCB. Soldering is performed using a reflow oven. Through-hole parts are added and soldered after reflow oven soldering using standard solder pencil. All components and materials used in the assembly process are RoHS compliant.

For manual PCB assembly the group must provide detailed drawings of the PCB with visible reference designators, the bill of materials (BOM) that includes components reference designators, component description, and part numbers.

Required assembly documentation for the transmitter subsystem includes the following documents:

1. PCB Top silk layer and top copper layer drawings (ic.f. Appendix A)
2. Bill of materials (c.f. Appendix C)

The figure below shows the PCB Top silk layer.

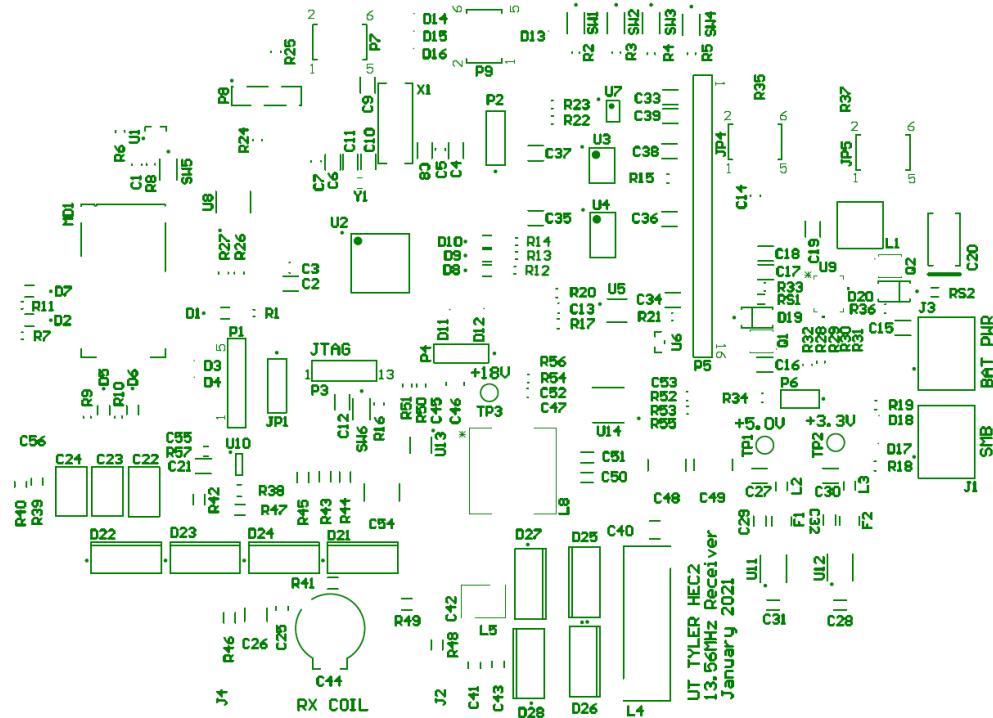


Figure 21: Receiver Top Silk Layer

The figure below shows the PCB Top copper layer.

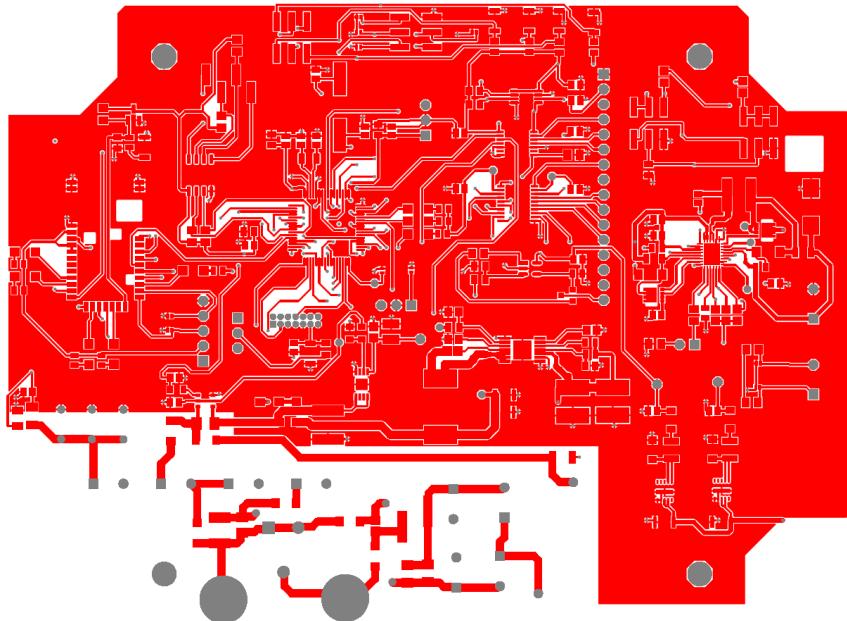


Figure 22: Receiver Top Copper Layer

The assembly will be performed by a professional worker. The assembly process consists of the following steps:

1. Solder paste printing on the PCB
2. Manual placement of surface mount components
3. Soldering using a reflow oven.
4. Through-hole soldering by hand using a solder iron pencil

All materials used in the assembly process are RoHS compliant. Also, all tools used in this process are standard tools used for the PCB assembly process.

*3.) Post Assembly Inspection* After the boards are assembled they must be inspected for solder quality and possible assembly errors. Components values such as resistance, capacitance, and part numbers must be compared against the BOM and the board drawing. Also, the inspection step includes component polarity and solder quality inspection. After this step, the receiver boards are ready for electrical verification and tests.

The receiver prototype design is intended to match the final hardware design. The enclosure selection may change depending on the thermal behavior of the receiver subsystem. Also, the differences that may exist between the receiver prototype and the final design solution are not known at this stage because the receiver electronics performance and efficiency need to be validated. Depending on the test results the group may apply changes in the receiver circuits.

### *C. Coil Production*

The coil development process involves printing a 3-dimensional hollow plastic fixture. The interior of the fixture contains a spiral bas-relief that shall fix the coil in the specified spiral form. The coil shall be connected to the PCB board using stranded copper wire. For ideal performance conditions, the coil must withstand 600V rms as well as possess a resistance of 69.906 mΩ. The coil is encased in a plastic enclosure to prevent electric shock. The plastic enclosure specification will have a size of 130mm x 110mm x 20mm. MFG alpha rated wire will be soldered to the coil and the other end of wire will be terminated with the ring terminal.

### *D. Expenditure Report*

The list below shows development tools and assembly tools cost that are used as an aid to design and produce the wireless charger system. This list does not include the cost of components that are part of the system.

#### **Evaluation Kits for Firmware**

Bluetooth Development Tools (802.15.1) RN4870 Sensor Board

Manufacturer part number: RN-4870-SNSR

Mouser part number: 579-RN-4870-SNSR

Cost: \$91.80

Ordered: 1 unit

Total cost: \$91.80

Bluetooth Development Tools (802.15.1) RN4870 click

Manufacturer part number: MIKROE-2543

Mouser part number: 932-MIKROE-2543

Cost: \$33.00

Ordered: 3 units

Total cost \$99.00

Development Boards & Kits - MSP430 MSP430FR5994 LaunchPad Dev Kit

Manufacturer part number: MSP-EXP430FR5994

Mouser part number: 595-MSP-EXP430FR5994

Cost: \$20.39

Ordered: 5 units

Total cost \$101.95

## **Hardware Evaluation Kits**

Power Management IC Development Tools LTC4162 DC2038= Li-ion,adjustable, MPP  
Manufacturer part number: DC2038A-J

Mouser part number: 584-DC2038A-J

Cost: \$150.00

Ordered: 1 unit

Battery packs for charger controller testing

Battery Packs 11.1V, 6.4Ah, 72Wh battery (3s2p)

Manufacturer part number: RRC2040-2

Mouser part number: 328-RRC20402

Ordered: 1 unit

Cost: \$105.00

## **Solder Stencil Production**

Solder paste stencils are ordered for each subsystem.

Manufacturer: JLC PCB

Manufacturer part number: Custom order

Solder paste stencil \$7.05

Total cost \$14.10

Table 15: Summary of Expenditures

	Expenditure Description	Subsystem	Cost
1	Hardware development kits	Receiver	\$255.00
2	Firmware evaluation kits	Transmitter/ Receiver	\$226.75
3	Solder paste stencils (board assembly)	Transmitter/Receiver	\$14.10
	TOTAL COST		\$495.85

The tables below account for man-hours expended in development and prototyping.

Table 16: Man-Hours Expenditure Report in Development and Prototyping

Task Description	Man-Hours
<b>Coil Production</b>	
Francisco Sosa worked on coil	8
Franci Franulovic worked on coil	8
<b>Subtotal</b>	<b>16 hours</b>
<b>Schematic design and capture</b>	
David Flory	90
Franci Franulovic	12
<b>Subtotal</b>	<b>102 hours</b>
<b>PCB Layout Design</b>	
Franci Franulovic	10
David Flory	9
<b>Subtotal</b>	<b>19 hours</b>
<b>PCB Assembly</b>	
Estimated time required to assemble four prototypes	16
<b>Subtotal</b>	<b>16 hours</b>
<b>Post Assembly Inspection</b>	
Assembly verification	1
Solder quality inspection	1
<b>Subtotal</b>	<b>2 hours</b>
<b>GUI Software Development</b>	
Chad Gibbons on GUI Software Architecture	5
Chad Gibbons	2
<b>Subtotal</b>	<b>7 hours</b>
<b>Firmware development</b>	
Natasha Franca	25
Francisco Sosa	8
Chad Gibbons	32
Chad Gibbons worked on test suite	10
<b>Subtotal</b>	<b>75 hours</b>

## Man-Hours Report Continued

<b>Task Description</b>	<b>Man-Hours</b>
<b>Learning Curves and Used Skilled Resources</b>	
David Flory on Altium	7
Firmware Team studied C/C++	15
Franci Franulovic developed PCB Schematic Drawing	11
Natasha Franca learned Object Oriented Programming in C	2
<b>Subtotal</b>	<b>35 hours</b>
<b>Subsystem Prototyping</b>	
Receiver PCB assembly	8
Parts procurement	2
Coil assembly	8
Coil Test	5
Hardware test	17
Firmware test	6
Quality control inspection	8
<b>Subtotal</b>	<b>54 hours</b>

Table 17: Development and Prototyping Summary of Man-Hours

<b>Task Description</b>	<b>Man-Hours</b>
Time Learning	35
Software development	82
Hardware development	137
Assembly	36
Quality Assurance	36
<b>Total</b>	<b>326 hours</b>

### *E. Budget*

This budget lists the expenses for development hardware, prototyping materials, and skilled labor necessary to realize and test the prototype.

Table 18: Development and Prototyping Budget

<b>Item Description</b>	<b>Price</b>	<b>Qty.</b>	<b>Totals</b>
Microchip Bluetooth RN4870 Sensor Board	\$91.80	1	\$91.80
Mikroe Bluetooth RN4870 click	\$33.00	3	\$99.00
TI MSP430FR5994 LaunchPad Dev Kit	\$20.39	5	\$101.95
Analog Devices LTC4162-L Evaluation Board	\$150.00	1	\$150.00
RRC Battery Packs 11.1V, 6.4Ah, 72Wh battery (3s2p)	\$105.00	1	\$105.00
16x2 Parallel LCD Display (for evaluation)	\$20.63	3	\$61.89
Receiver BOM	\$77.30	2	\$154.59
Transmitter BOM	\$128.78	2	\$257.55
System BOM	\$136.92	1	\$136.92
<b>Total Hardware</b>			<b>\$1,158.70</b>

#### *F. Current Manufacturing Abilities*

The process starts with the purchase of the necessary components. Having the PCBs' Altium CAD Software drawings, the transmitter and receiver board files are sent for manufacturing at JLC PCB factory in China. Shipping time for the boards are around seven days. Small parts for the boards are also generated in the Altium software as a bill of materials, and those include but are not limited to resistors, capacitors, transistors, and diodes. Those can be ordered anywhere online and take up to seven days for delivery. Small parts can be purchased at local electronics stores. Hardware off-the-shelf items include power adapter, Li-Ion battery, and LCD display, and those can also be readily purchased at any local electronics store. Assembling is done by soldering the components according to the board layout, and each board takes approximately four to five hours to assemble by hand. The last setup step is to load the firmware onto the boards which requires less than one hour. In that same hour, testing the prototype can be completed if there are no issues hindering the charging process. The board would need to be troubleshooted for firmware, software, or hardware issues; the troubleshooting can take minutes or hours to fix.

Table 19: Prototype Production Timetable

Description	Time Required
Shipping Time for PCBs and other components	7 days
Manual receiver PCB assembly	5 hours
Manual transmitter PCB assembly	5 hours
Parts procurement process for each subsystem	2 hours
Coil assembly for each subsystem	1 hour
Coil Test	1 hour
Hardware test	1 hour
Firmware load and test	1 hour
Quality control inspection	8 hours
<b>Total</b>	<b>8 days</b>

## V. REFERENCES

### SOFTWARE REFERENCES

Block diagrams were rendered in Windows Visio Standard 2019.

Multisim circuits simulated in NI Multisim V.14.2 2019.

PCB Schematics rendered in Altium-365.

CAD Drawings rendered in NanoCAD.

## DESIGN REFERENCES

- [1] “Standard High Power System”. In: *WIBOTIC Products* (2021). URL: <https://www.wibotic.com/products/high-power-dev-kit/>.
- [2] “Anatomy of a Create 2”. In: *iRobot Education: Create 2: Create | Advanced* (2021).
- [3] “MSP430FR599x, MSP430FR596x Mixed-Signal Microcontrollers”. In: *Texas Instruments Inc. SLASE54C - MARCH 2016 - REVISED AUGUST 2018* (2018), pp. 1–172. URL: [https://www.ti.com/lit/ds/symlink/msp430fr5994.pdf?ts=1604041478538&ref\\_url=https%253A%252F%252Fwww.ti.com%252Fproduct%252FMSP430FR5994](https://www.ti.com/lit/ds/symlink/msp430fr5994.pdf?ts=1604041478538&ref_url=https%253A%252F%252Fwww.ti.com%252Fproduct%252FMSP430FR5994).
- [4] *Texas Instruments MSP430FR5994 Tool Description*. URL: <https://www.ti.com/tool/MSP-EXP430FR5994>.
- [5] “TPSM265R1 65-V Input, 100-mA Power Module with Ultra-Low IQ”. In: *Texas Instruments Inc. SNVSBF6A - OCTOBER 2019 - REVISED DECEMBER 2019* (2019), pp. 1–32. URL: [https://www.ti.com/lit/ds/symlink/tpsm265r1.pdf?ts=1606735419804&ref\\_url=https%253A%252F%252Fduckduckgo.com%252F](https://www.ti.com/lit/ds/symlink/tpsm265r1.pdf?ts=1606735419804&ref_url=https%253A%252F%252Fduckduckgo.com%252F).
- [6] “TPS54160 1.5-A, 60-V, Step-Down DC/DC Converter with Eco-mode”. In: *Texas Instruments Inc. SLVSB56C - MAY 2012 - REVISED FEBRUARY 2014* (2014), pp. 1–58. URL: <https://www.ti.com/lit/ds/symlink/tps54160.pdf>.
- [7] *Conductor Bulk Resistivity & Skin Depths*. RF Cafe. URL: <https://www.rfcafe.com/references/electrical/cond-high-freq.htm>.

## APPENDIX A: RECEIVER PCB SCHEMATICS



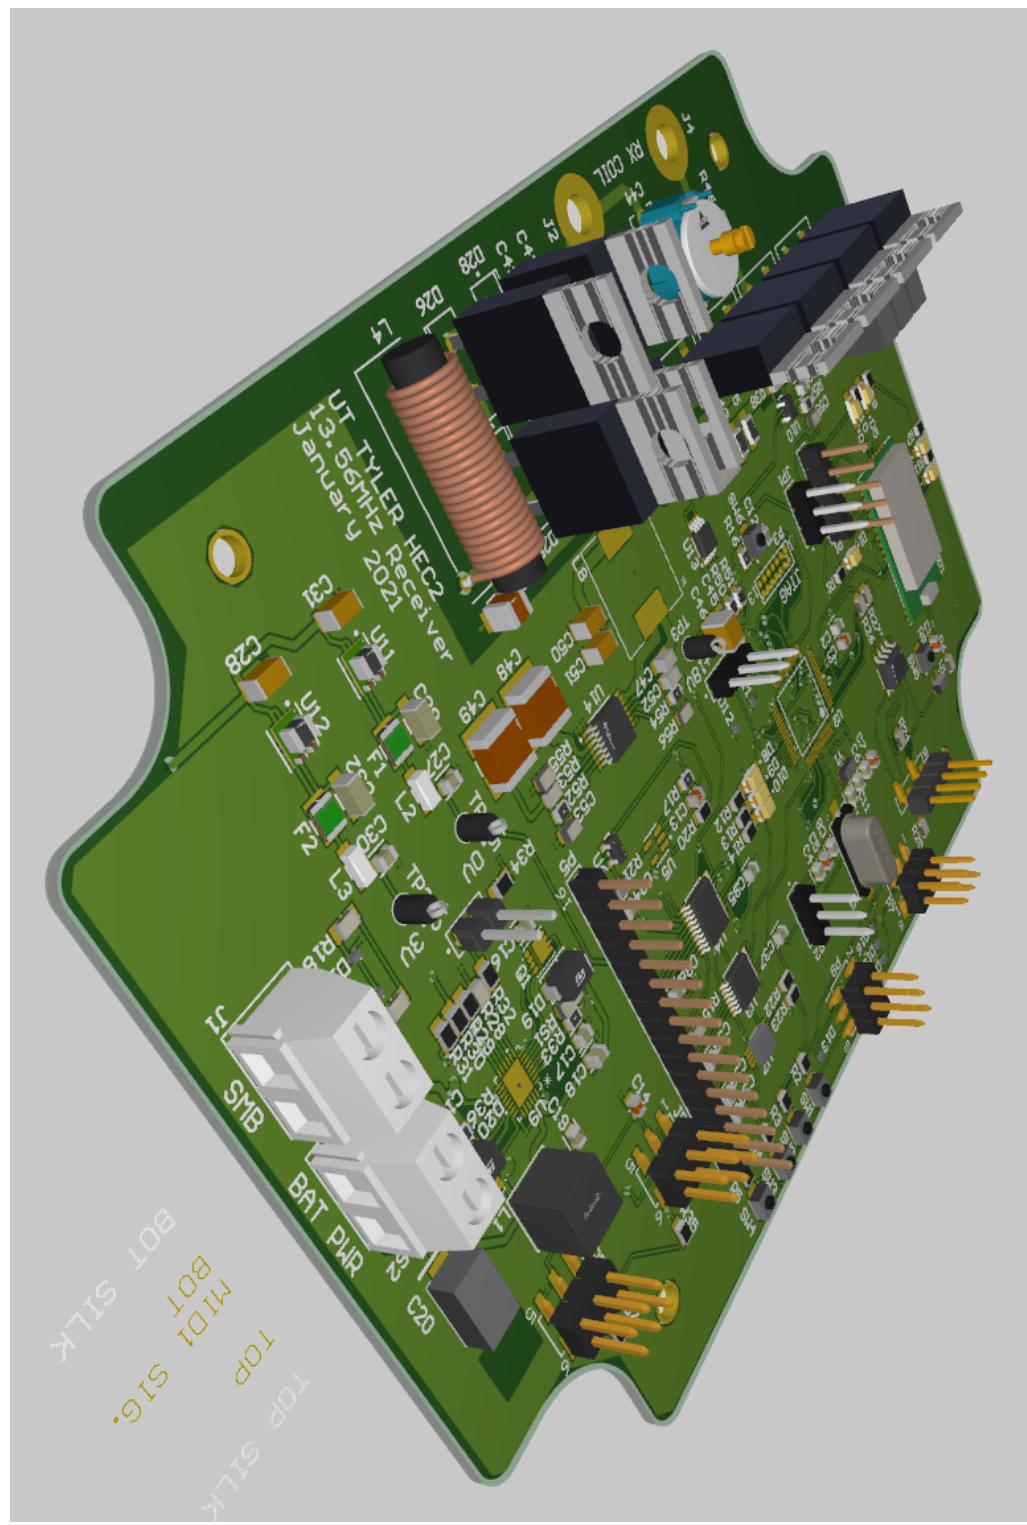


Figure 23: Isometric Image of Receiver PCB


## 1. Receiver Controller

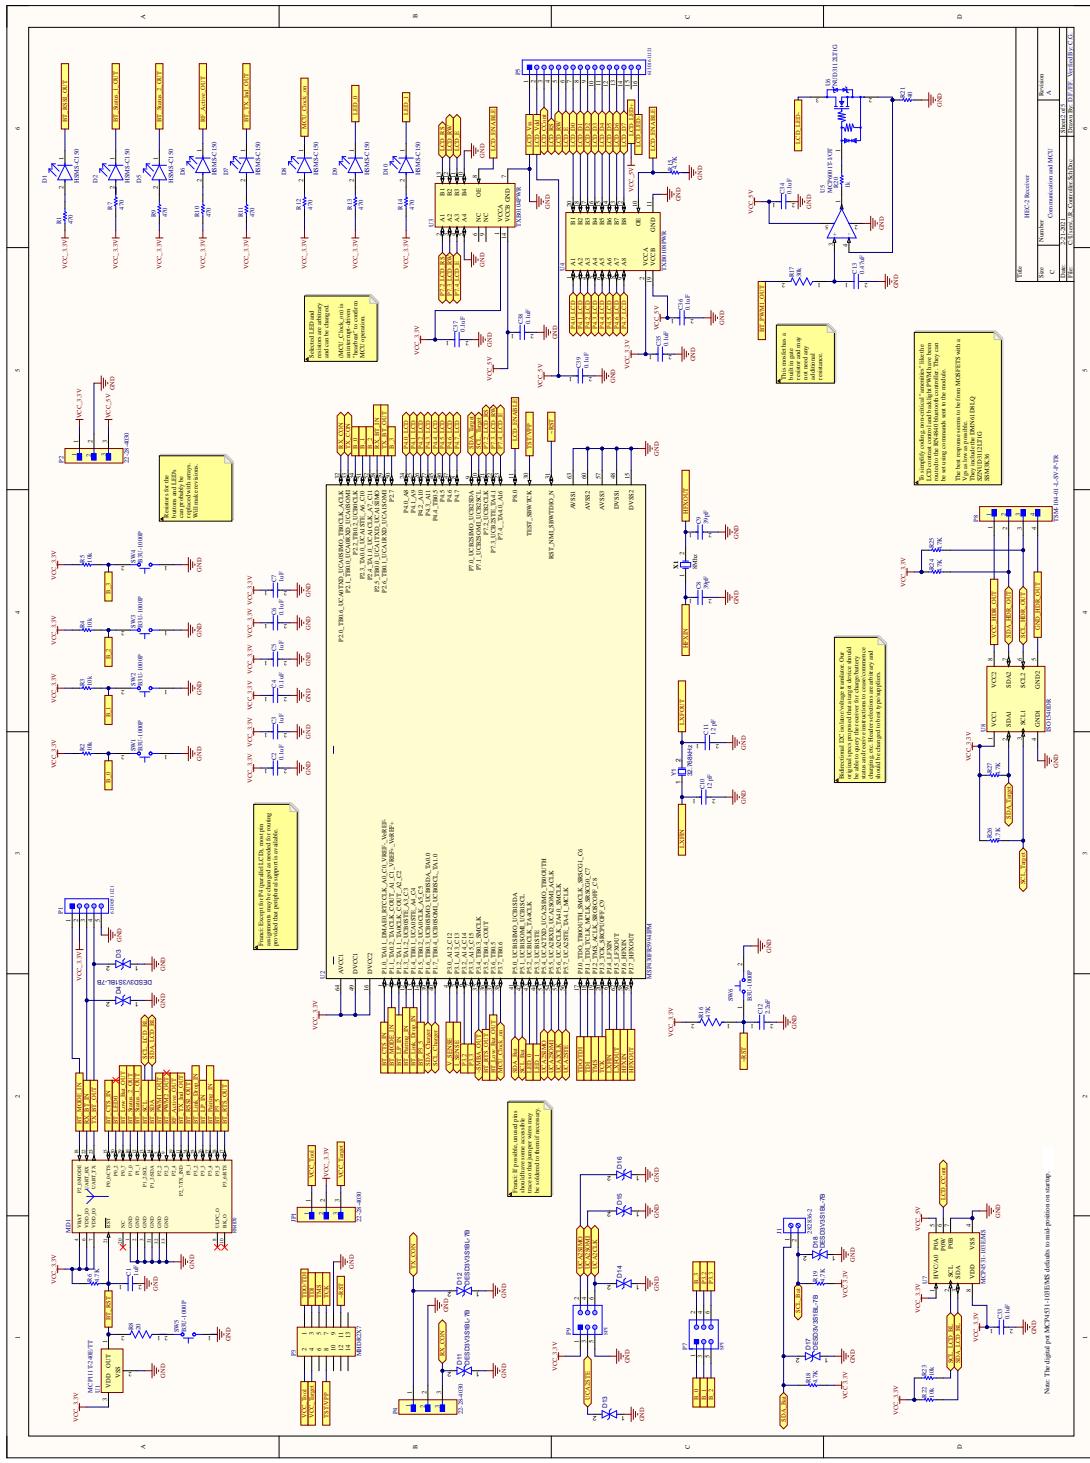


## *2. Receiver Battery Charger*

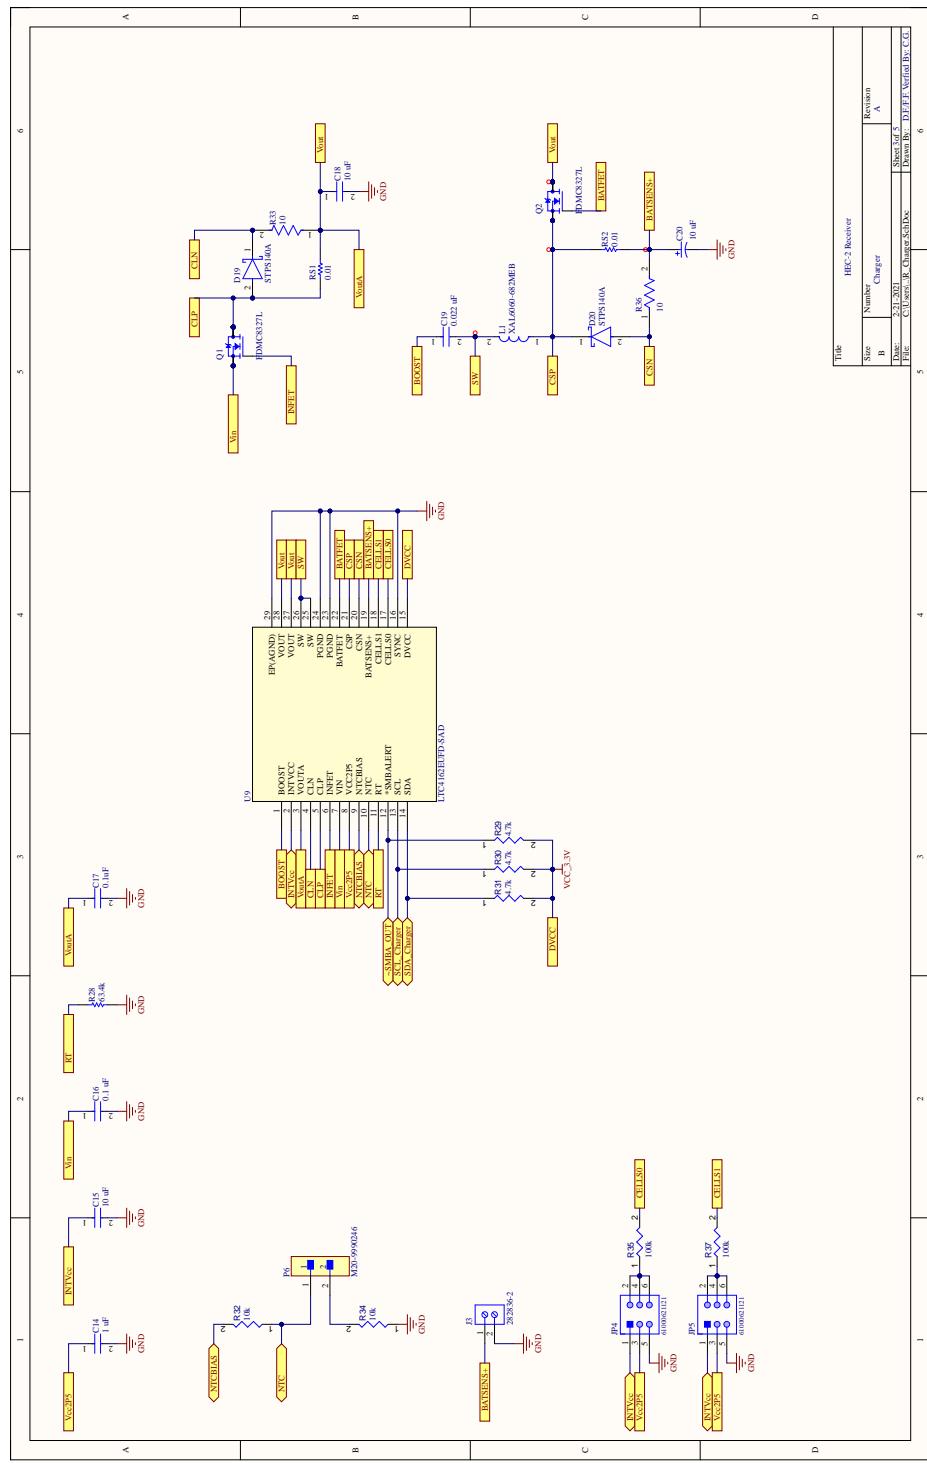


### 3. RF/DC Converter

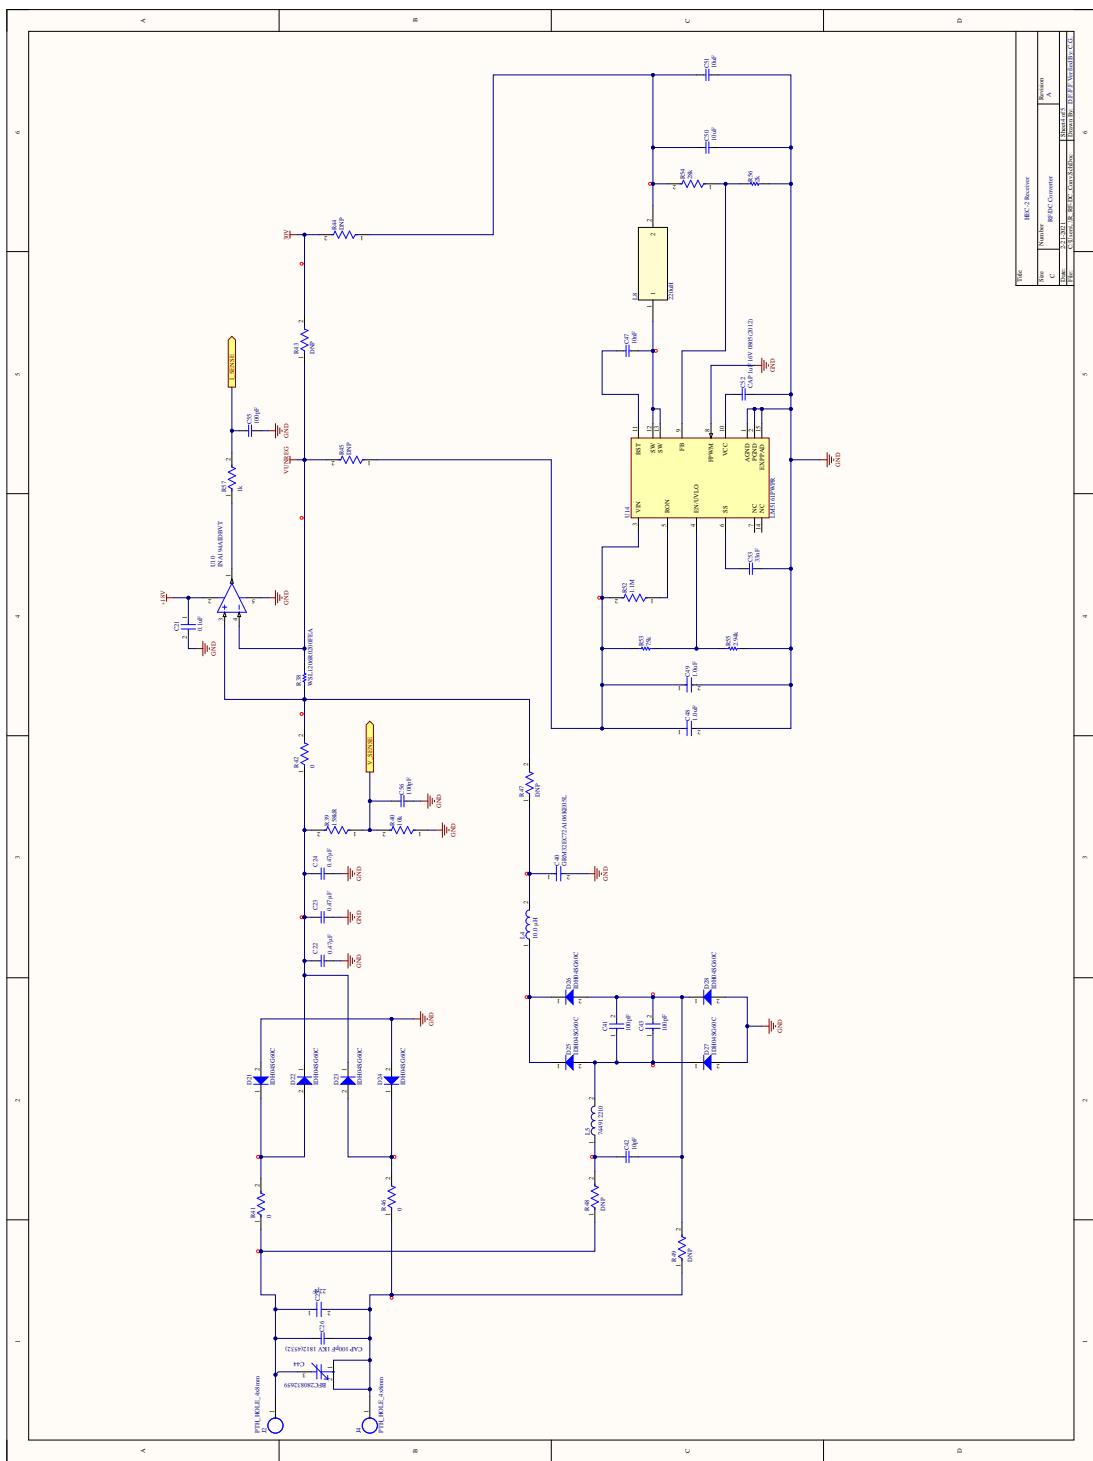


#### 4. DC/DC Converter

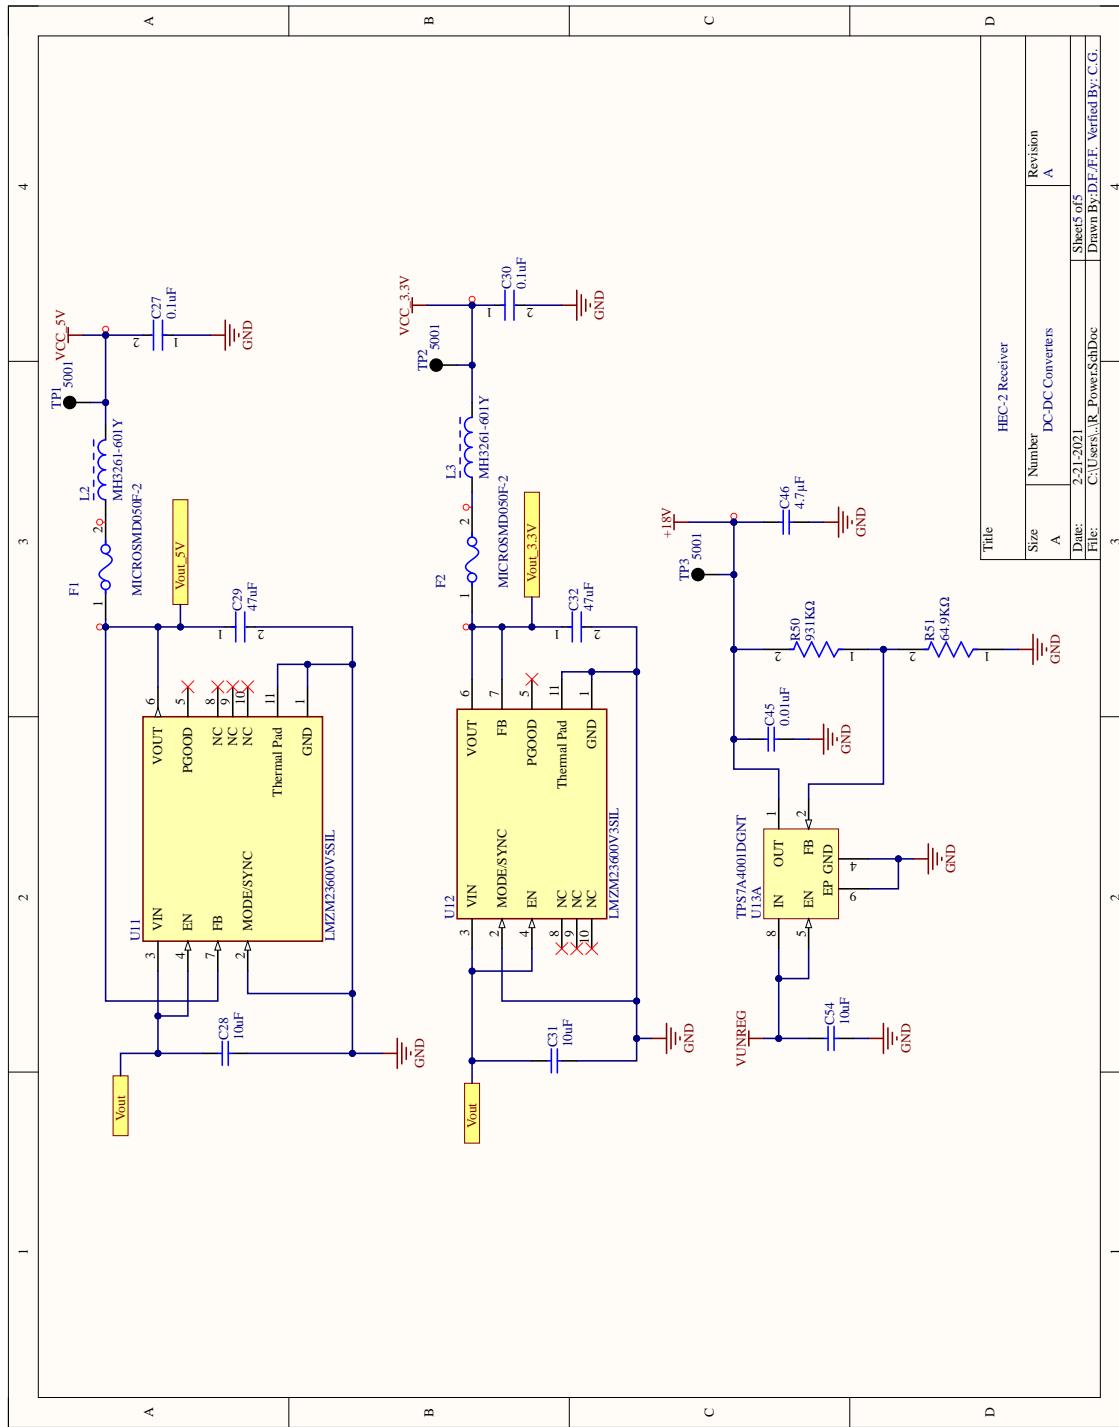

5. Top Copper Layer

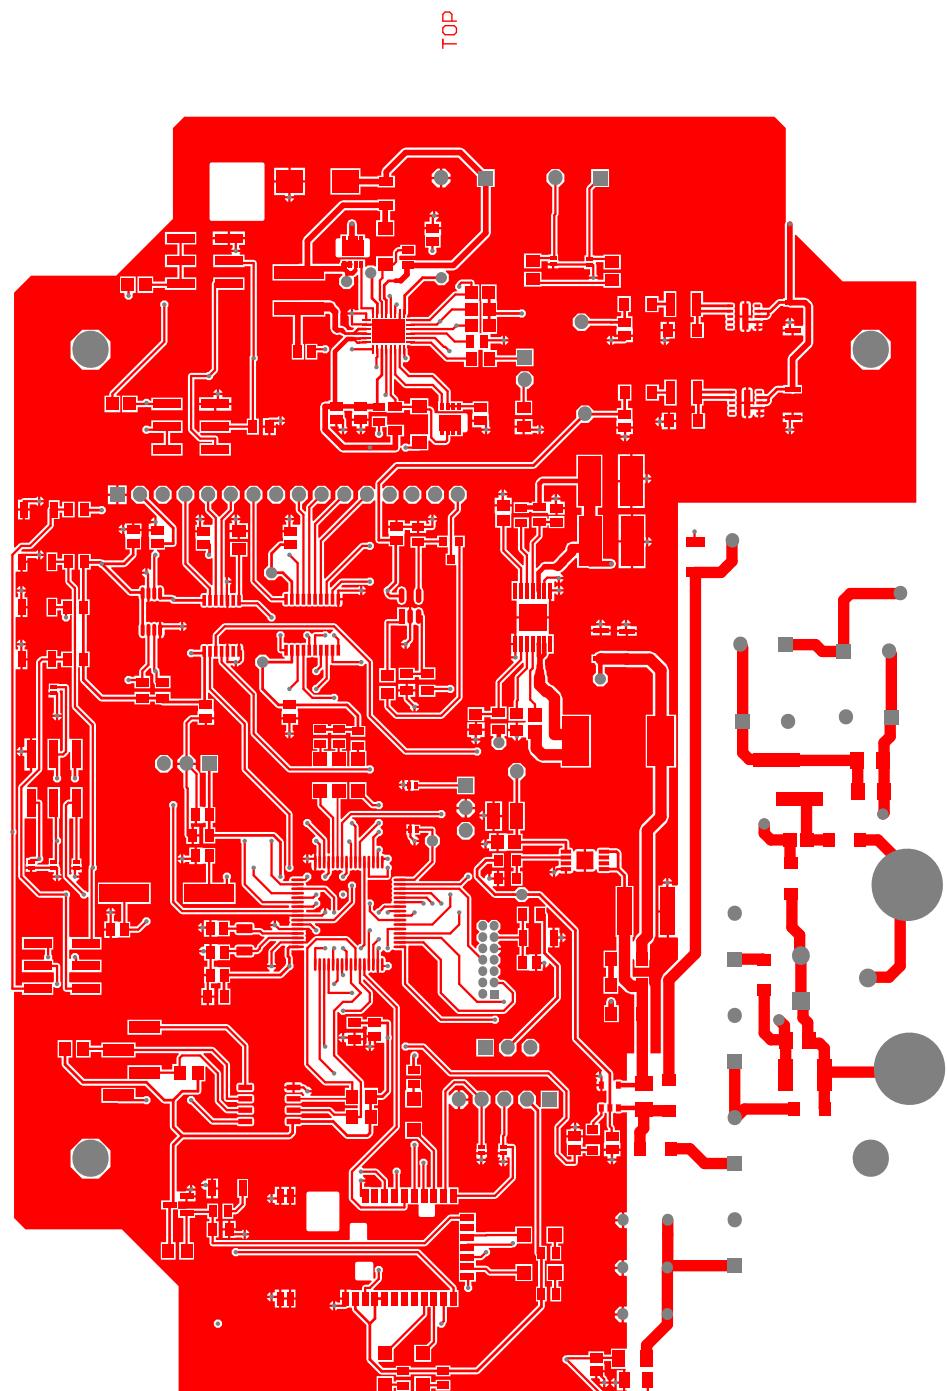

6. Top Silk Layer

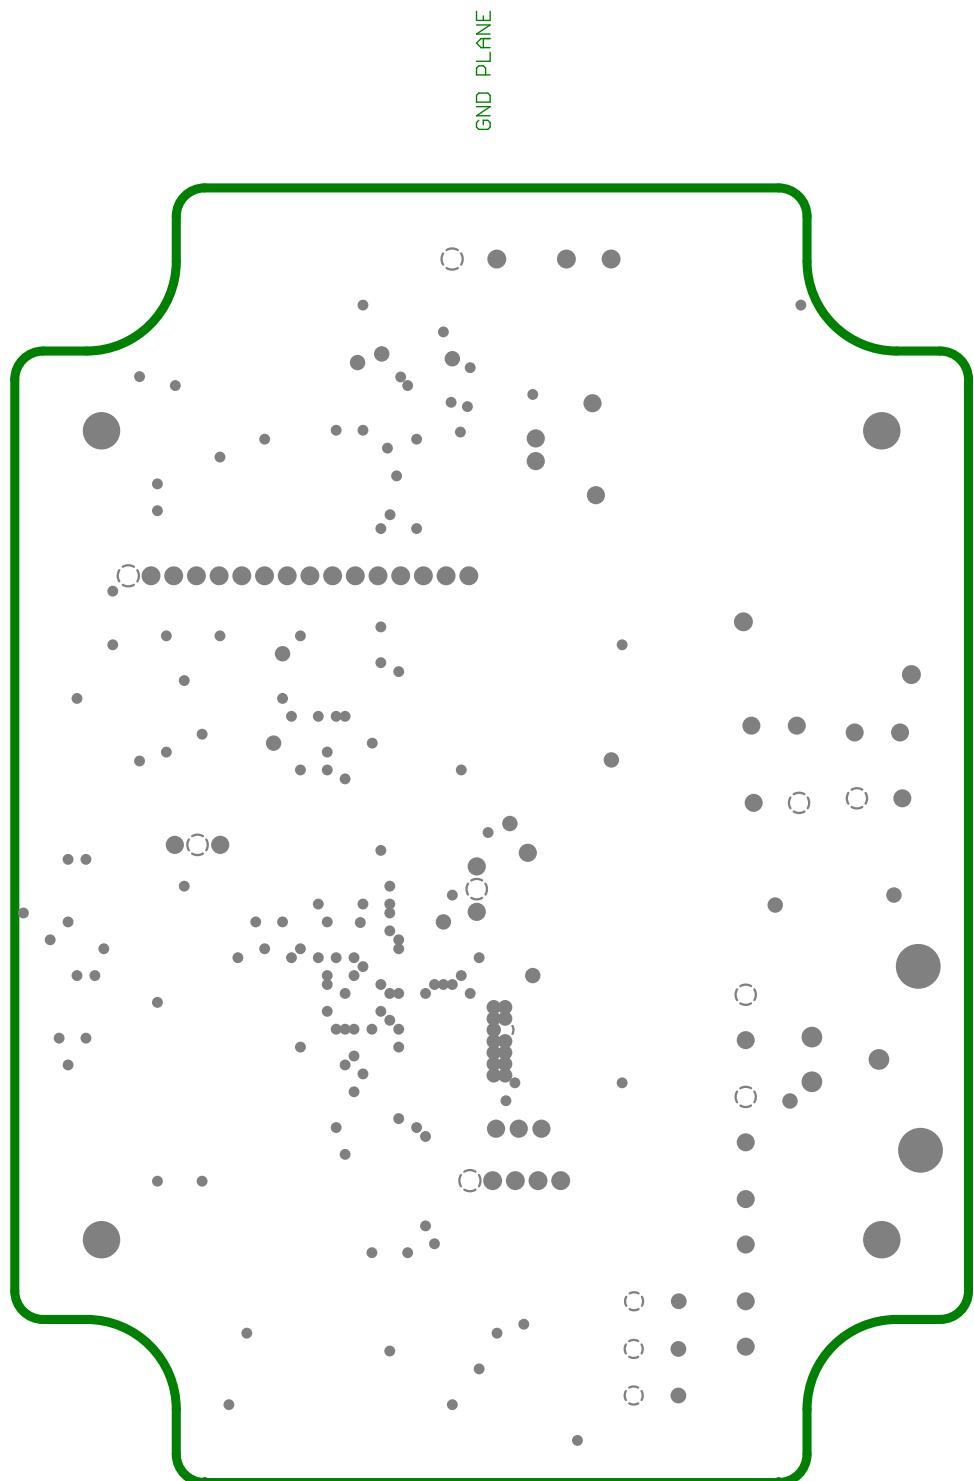

## APPENDIX B: TRANSMITTER PCB SCHEMATICS



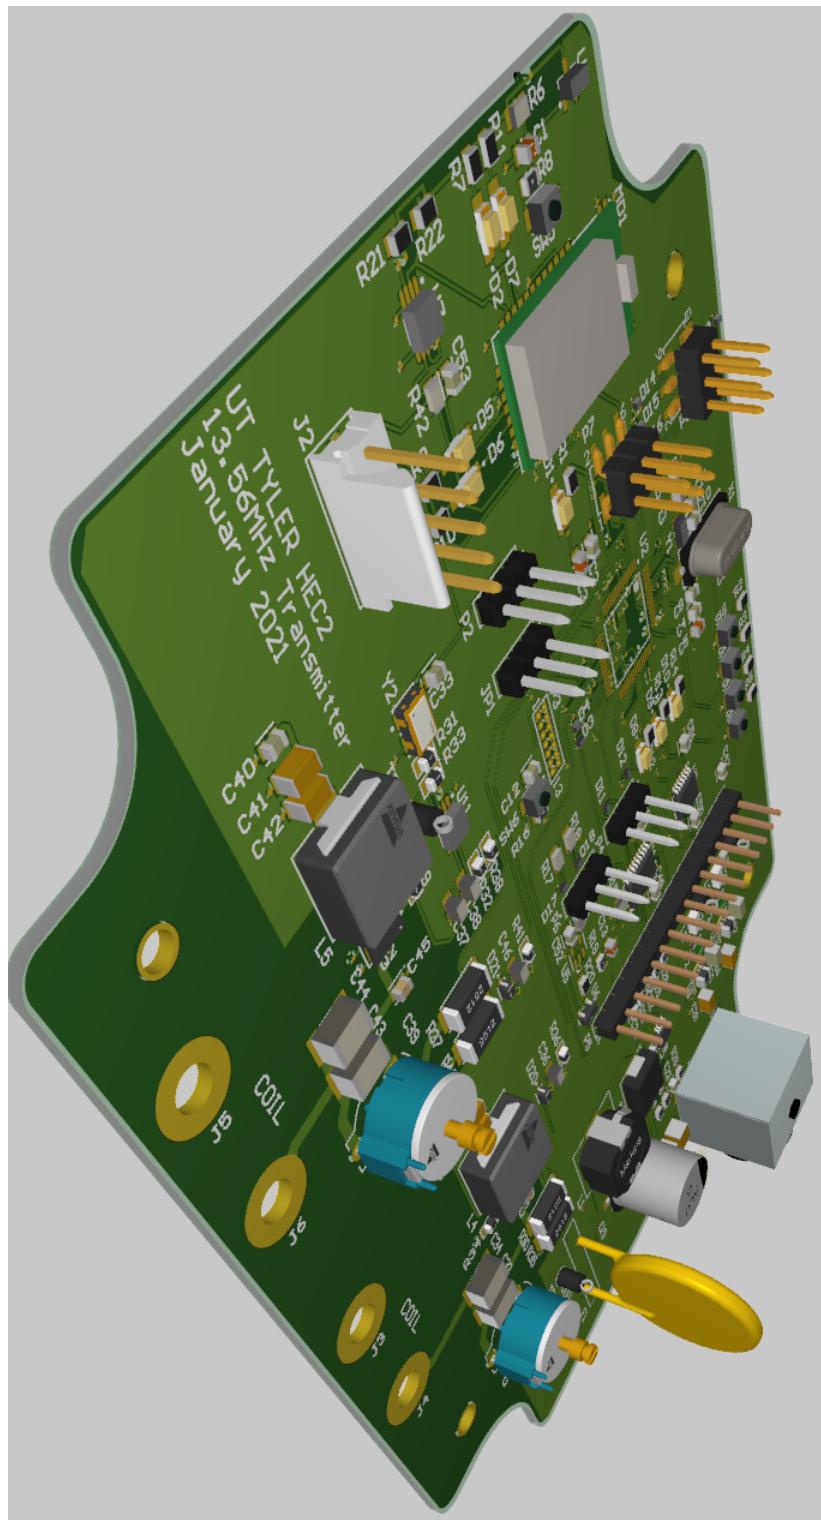


Figure 24: Isometric Image of Transmitter PCB


## 1. Transmitter Controller

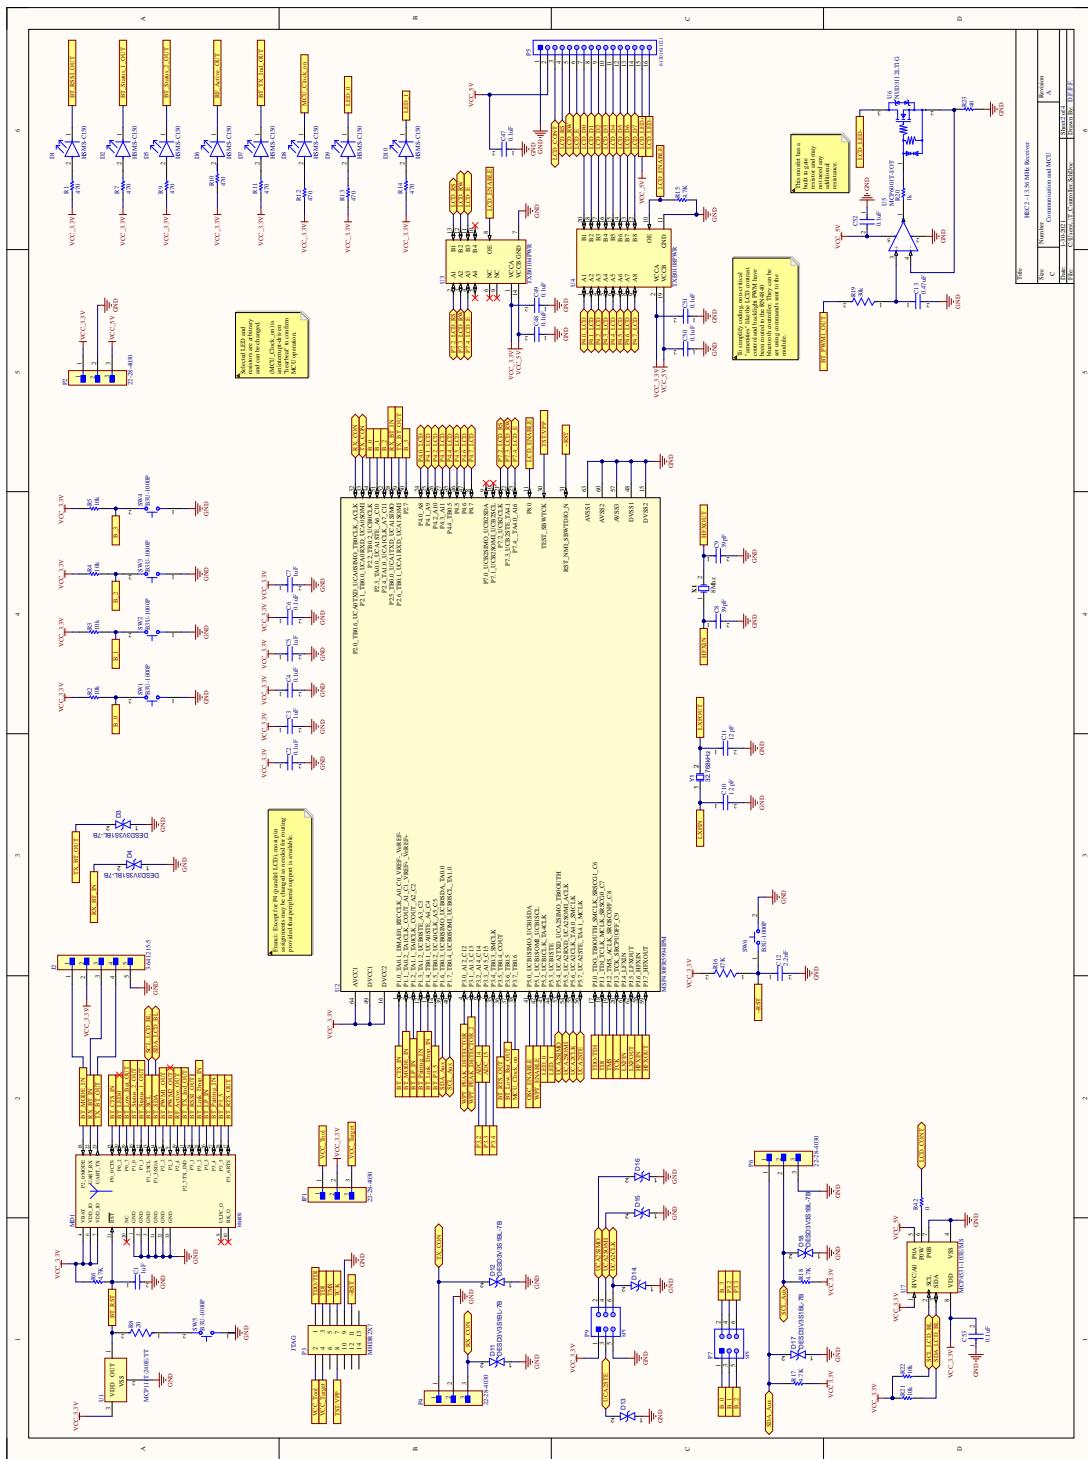


## 2. DC/DC Converter

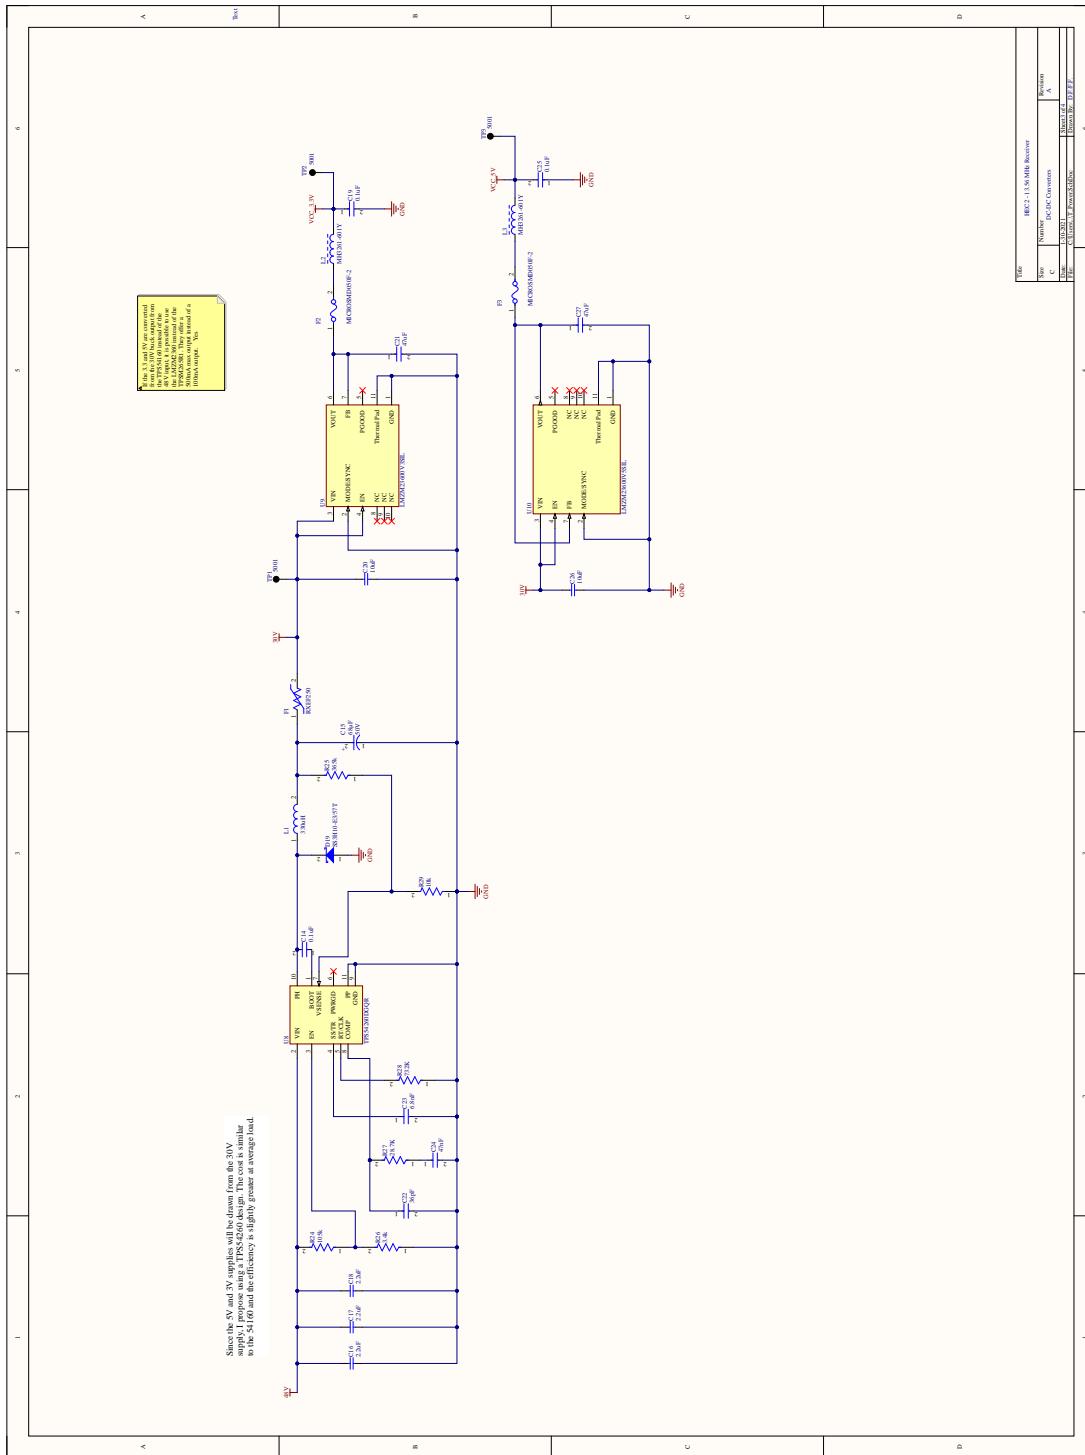


### 3. Coil Driver

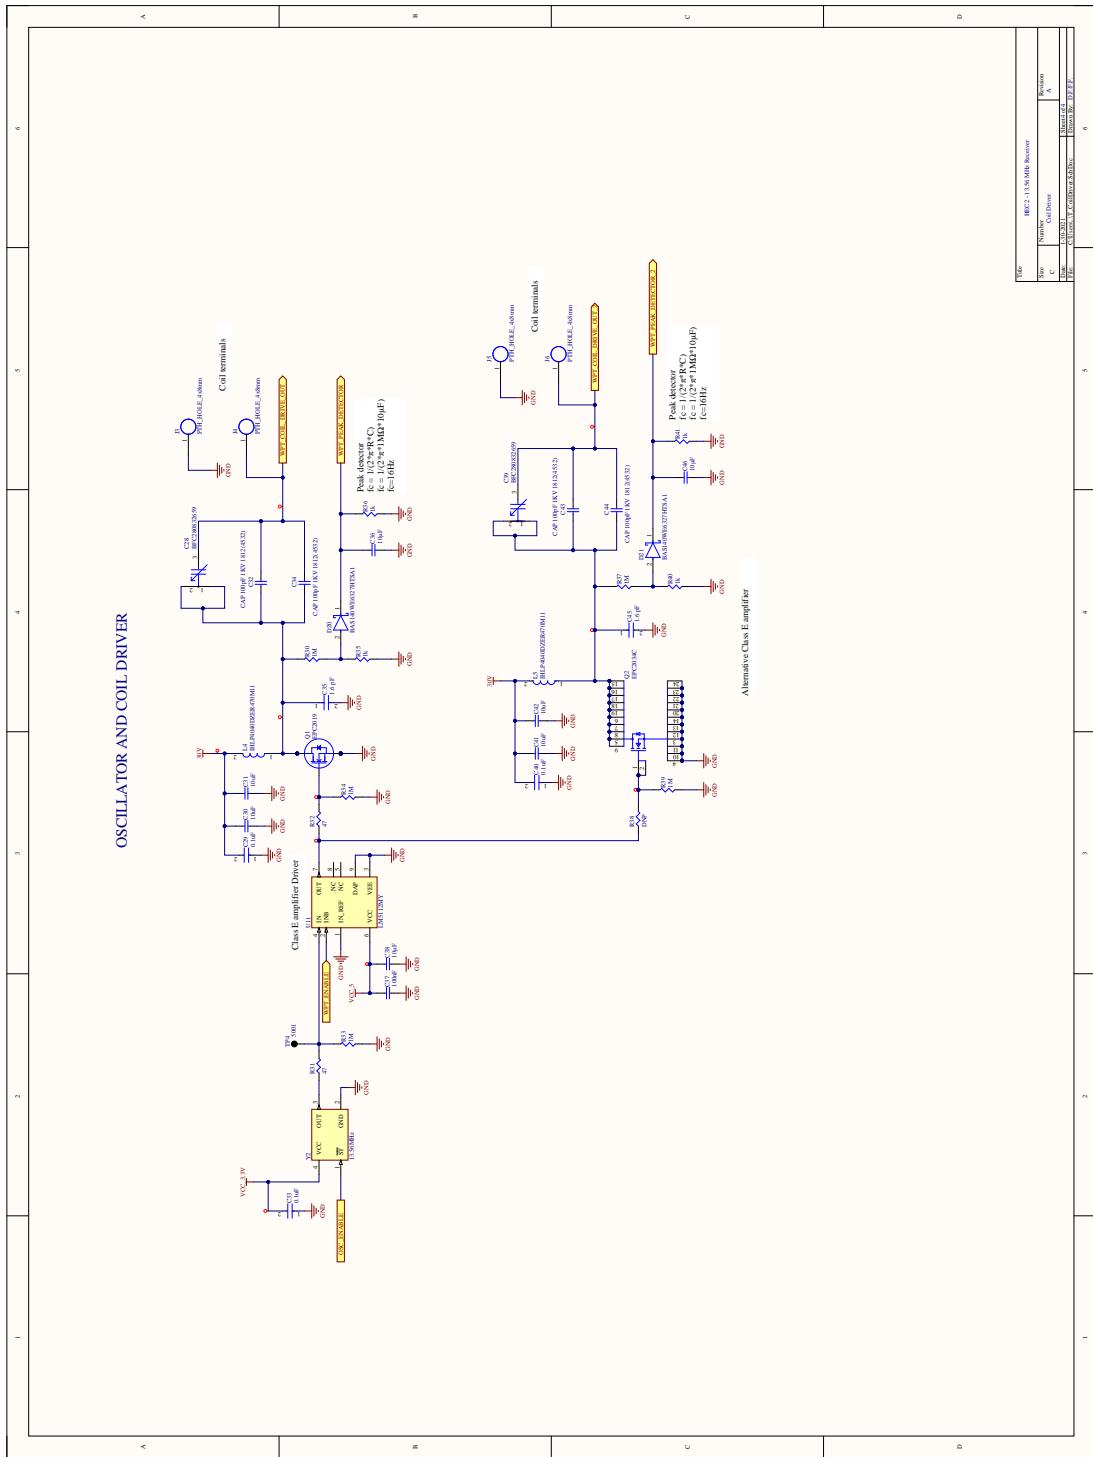

4. Top Copper Layer

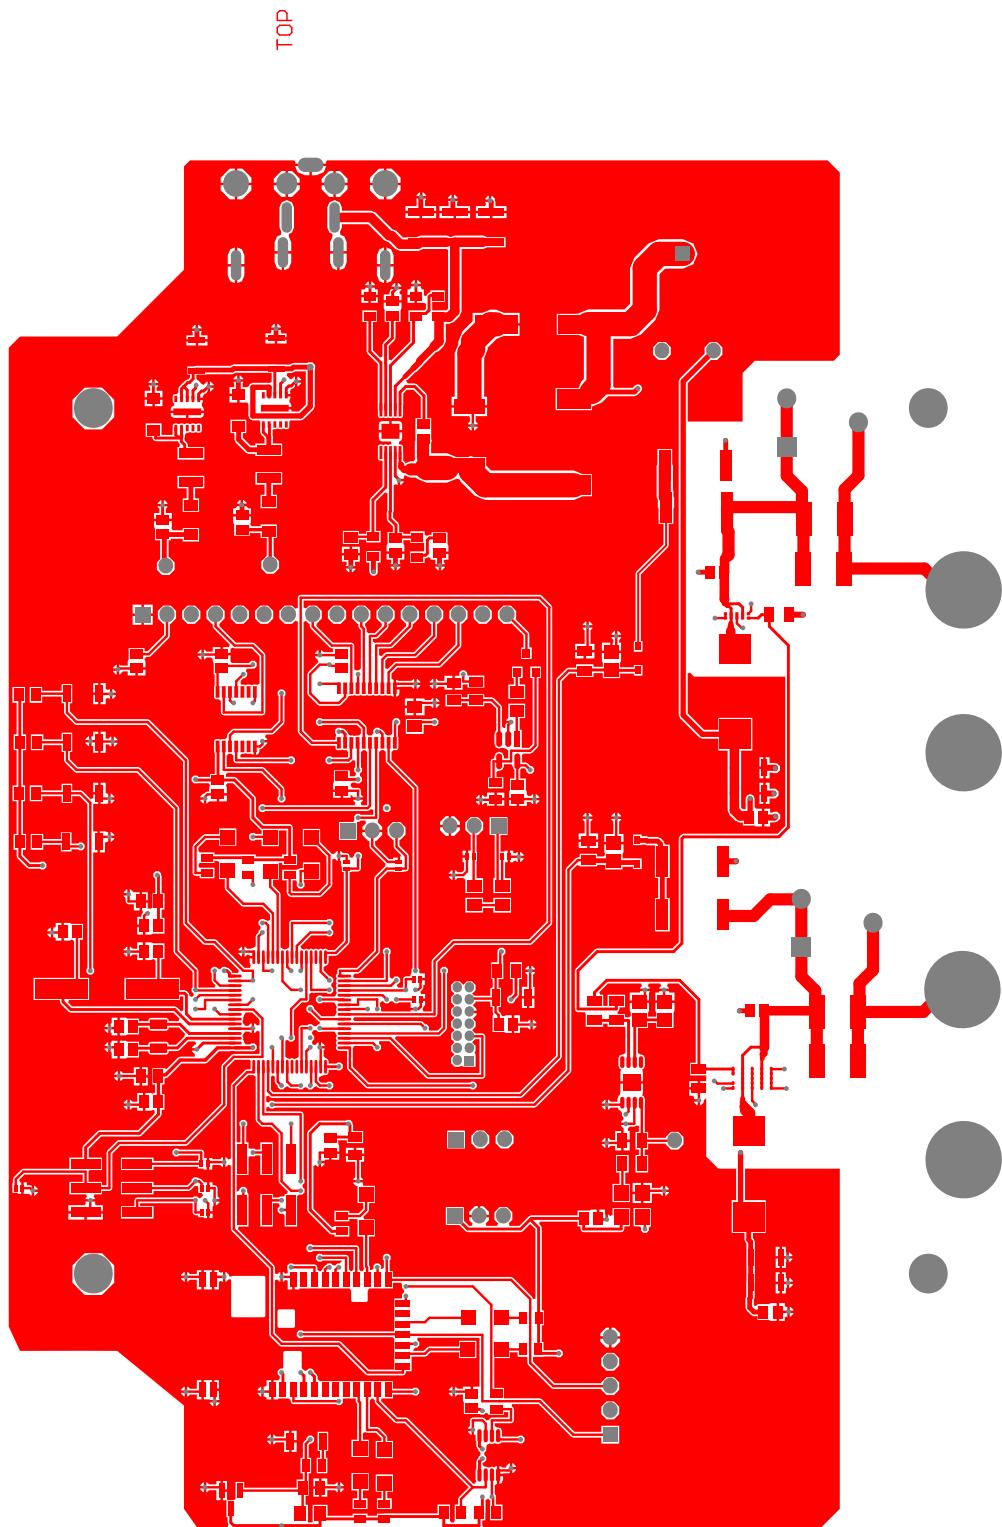

5. Top Silk Layer

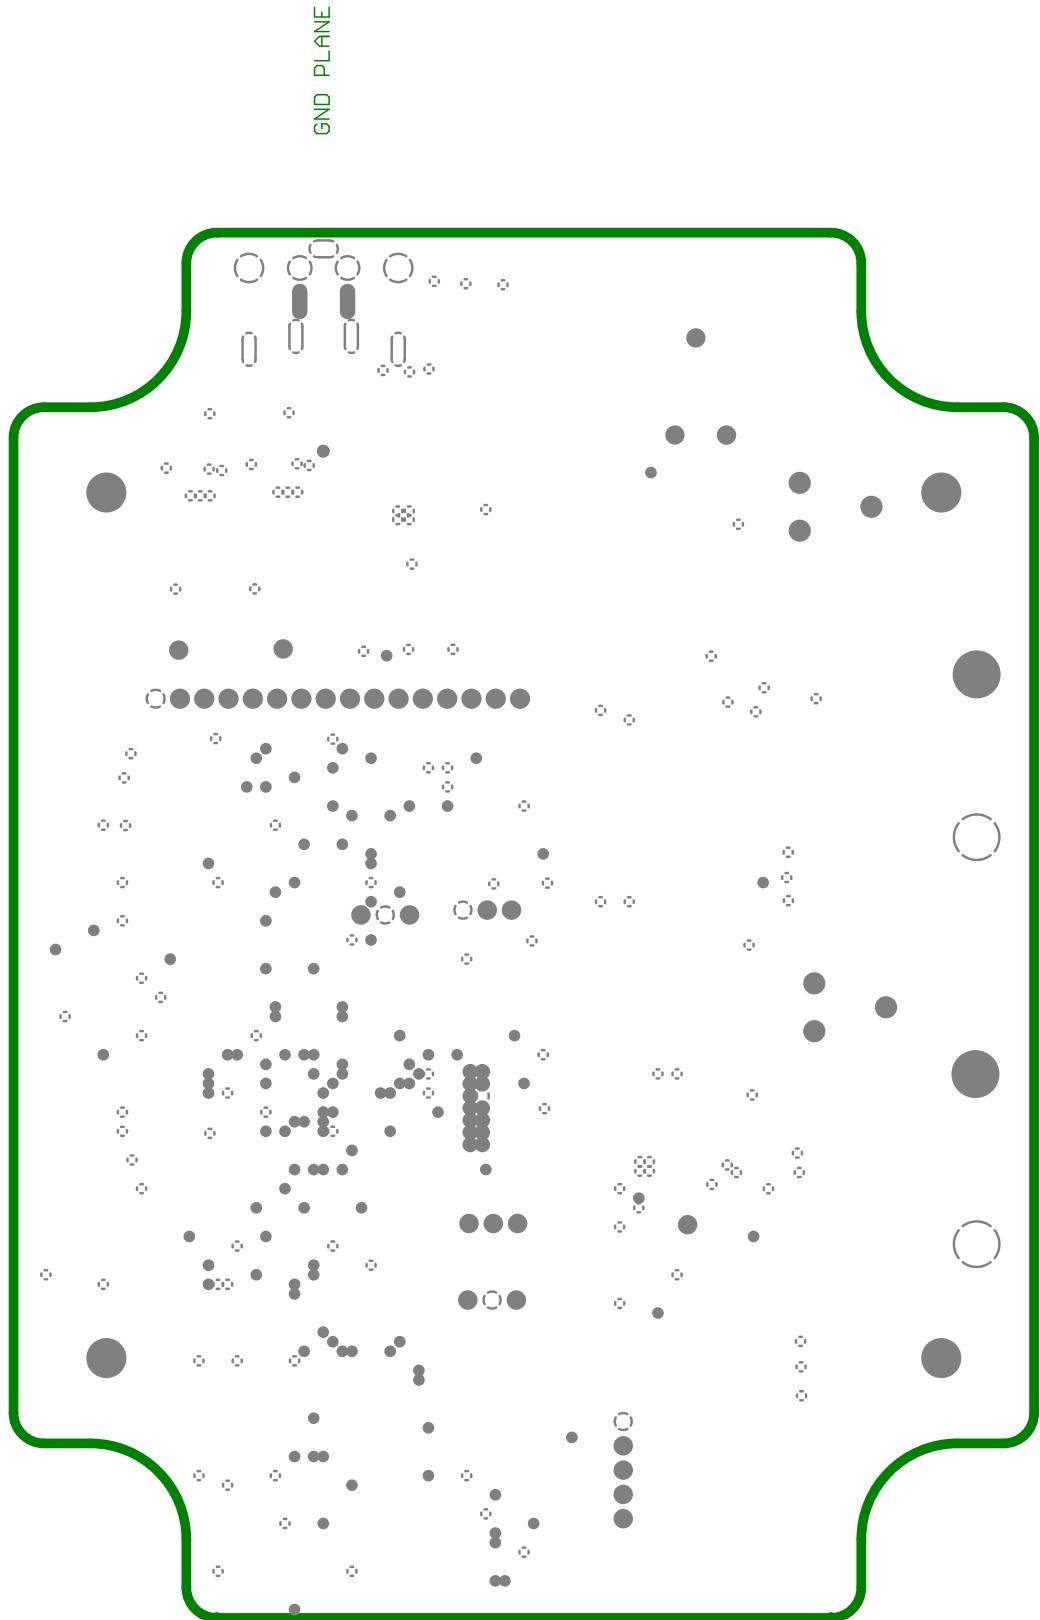

## APPENDIX C: RECEIVER BOM

21	2 C48, C49	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 220uF 50Vt X7R 10%	GRM555DR72E105KWN01L Murata	GRM555DR72E105KWN01L Mouse	81-GRM555DR72E105K 5MW01_01-398382.pdf	<a href="https://www.mouser.com/datasheet/2/281/j/GRM55DR72E105KWN01L_5MW01_01-398382.pdf">https://www.mouser.com/datasheet/2/281/j/GRM55DR72E105KWN01L_5MW01_01-398382.pdf</a>
22	1 C52	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 10V 1uF X7R 0805 10%	KEMET	C0805C105K4RACTU Broadcom Limited	89-C0805C105K4RACTU 630-15MS-C150	<a href="https://www.mouser.com/datasheet/2/212/kem-c1002_x7r_s_md-1102033.pdf">https://www.mouser.com/datasheet/2/212/kem-c1002_x7r_s_md-1102033.pdf</a>
23	1 C54	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 100V 10uF X7R 220uF Tol High CV	AVX	22201C106MAT2A H5K5-C150	581-22201C106MAT2A 630-15MS-C150	<a href="https://www.mouser.com/datasheet/2/40/YTRD/electric-hem-cx-c5-05mar2012-182765.pdf">https://www.mouser.com/datasheet/2/40/YTRD/electric-hem-cx-c5-05mar2012-182765.pdf</a>
24	8 D1, D2, D5, D6, D7, D8, D9, D10	Standard ESD - SMD Standard Ld53 - SMD Red Diffused 656nm 10mcd		ESD Suppressors / TVS Diodes ESD Suppressors / TVS Diode Low Cap BiTVS 10pF 3.3V 8.8Vbs 25kV ESD Suppressors / TVS Diodes ESD Suppressors / TVS Diode Low Cap BiTVS 3.3V 8.8Vbs 25kV Diodes Incorporated	621-DESDV51BL7B 621-DESDV51BL7B	<a href="https://www.mouser.com/datasheet/2/115/DESDV51BL7B_321080.pdf">https://www.mouser.com/datasheet/2/115/DESDV51BL7B_321080.pdf</a>
25	5 D3, D11, D12, D17, D18	ESD Suppressors / TVS Diodes ESD Suppressors / Schottky Diodes & Rectifiers Schottky Diodes & Rectifiers SiC DIODES Resettable Fuses - PPTC Resettable Fuses - PTIC	Infinion	DES3V35S1BL7B STPS140A	621-DESDV51BL7B 551-STPS140A	<a href="https://www.mouser.com/datasheet/2/389/tp1140-1851573.pdf">https://www.mouser.com/datasheet/2/389/tp1140-1851573.pdf</a>
26	5 D4, D3, D14, D15, D16	5A 13.2V 40A Imax	Littelfuse	MICROSM050F-2	621-DESDV51BL7B 650-MICROSM050F-2	<a href="https://www.mouser.com/datasheet/2/40/littelfuse_ptc_mic_002_06_en.pdf">https://www.mouser.com/datasheet/2/40/littelfuse_ptc_mic_002_06_en.pdf</a>
27	2 D19, D20	Fired Terminal Blocks Fired Terminal Blocks 5.0MM PCB COUNT: 2P	TE Connectivity	282836-2	571-22-28-04030 HEADERS-228162.pdf	<a href="https://www.mouser.com/datasheet/2/276/0022284030_PCB_-PartCtxt=228162.pdf">https://www.mouser.com/datasheet/2/276/0022284030_PCB_-PartCtxt=228162.pdf</a>
30	2 J1, J3	Headers & Wire Housing Headers & Wire	Molex	22-28-4030	538-22-28-04030 HEADERS-228162.pdf	<a href="https://www.mouser.com/datasheet/2/445/61/000621121-1717892.pdf">https://www.mouser.com/datasheet/2/445/61/000621121-1717892.pdf</a>
31	2 J2, J4	Housings 3P VERT HEADER Sn			710-6100621121	<a href="https://www.mouser.com/datasheet/2/597/yal660x-70658.pdf">https://www.mouser.com/datasheet/2/597/yal660x-70658.pdf</a>
32	3 IP1, P2, P4	Headers & Wire Housing Headers & Wire			994-XA6060-682/MEB	<a href="https://www.mouser.com/datasheet/2/54/m-777565.pdf">https://www.mouser.com/datasheet/2/54/m-777565.pdf</a>
33	2 IP4, IP5	Housings WRPID 2.54mm SMT Gp Hrd Dual Srt Fixe Inductors Fixed Inductors 6.8uH Shld 10% 96.20.8mDms AECQ2	Würth Elektronik Collart	XAL6060-682/MEB	652-MH3261-601Y	<a href="https://www.mouser.com/datasheet/2/445/744711005-1722097.pdf">https://www.mouser.com/datasheet/2/445/744711005-1722097.pdf</a>
34	1 L1	2 L2, L3	CURRENT Ferrite Beads Ferrite Beads 600 ohms 25% HIGH Bourns	MH3261-601Y	710-74492210	<a href="https://www.mouser.com/datasheet/2/445/744912210-172335.pdf">https://www.mouser.com/datasheet/2/445/744912210-172335.pdf</a>
35	1 L4	1 L5	10uH 5.1mOhm 100nH 7.4150MHz	Würth Elektronik	744912210	<a href="https://www.mouser.com/datasheet/2/537/msi110-270677.pdf">https://www.mouser.com/datasheet/2/537/msi110-270677.pdf</a>
36	2 L8	2.1A 245mOhms AECQ2	Collart	MSI210-224KEB	994-M55120-224KEB	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-579-RN4870-JRM140">https://www.mouser.com/datasheet/2/445/62/000621121-579-RN4870-JRM140</a>
37		Bluetooth Modules (802.15.1) Bluetooth Modules Shielded, Antenna, ASCII Interface, 12x22mm	Microchip	RN4870-JRM140	579-RN4870-JRM140	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-579-RN4870-JRM140">https://www.mouser.com/datasheet/2/445/62/000621121-579-RN4870-JRM140</a>
38		Headers & Wire Housing Headers & Wire Housings WRPID 2.54mm Hot SP Single Str Gold	Würth Elektronik	61300511121	710-61300511121	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf">https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf</a>
39	1 M01	Headers & Wire Housing Headers & Wire Housings WRPID 2.54mm Hot SP Single Str Gold	Würth Elektronik	62201421121	710-62201421121	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf">https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf</a>
40	1 P1	Headers & Wire Housing Headers & Wire Housings WRPID 2.54mm Hot SP Single Str Gold	Würth Elektronik	61302611121	710-61302611121	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf">https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf</a>
41	1 P3	Headers & Wire Housing Headers & Wire Housings WRPID 2.54mm Hot SP Single Str Gold	Würth Elektronik	61000621121	710-61000621121	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf">https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf</a>
42	1 P5	Headers & Wire Housing Headers & Wire Housings 100° Surface Mount Terminal Strip Gold	Sumtec	TSM-104-01-L-SV-P-TTR	710-51301611121	<a href="https://www.mouser.com/datasheet/2/527/lsm-1344849.pdf">https://www.mouser.com/datasheet/2/527/lsm-1344849.pdf</a>
43	1 P6	Headers & Wire Housing Headers & Wire Housings 02 SIL VERTICAL PIN HEADER TIN	Harwin	M70-9990246	855-M70-9990246	<a href="https://www.mouser.com/datasheet/2/118/l120-999-1218971.pdf">https://www.mouser.com/datasheet/2/118/l120-999-1218971.pdf</a>
44	2 P7, P9	Headers & Wire Housing Headers & Wire Housings WRPID 2.54mm SMT Gp Hrd Dual Srt	Würth Elektronik	61000621121	710-61000621121	<a href="https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf">https://www.mouser.com/datasheet/2/445/62/000621121-1717892.pdf</a>
45	1 P8	Headers & Wire Housing Headers & Wire Housings 100° Surface Mount Terminal Strip Gold			200-TSM10401LSVTR	<a href="https://www.mouser.com/datasheet/2/308/1807402.pdf">https://www.mouser.com/datasheet/2/308/1807402.pdf</a>
46	2 Q1, Q2	PowerTrench MOSFET	ON Semiconductor	FDMG8327L	512-FDMG8327L	<a href="https://www.mouser.com/datasheet/2/447/pv0_rc_group_51_R05_L_10-1564068.pdf">https://www.mouser.com/datasheet/2/447/pv0_rc_group_51_R05_L_10-1564068.pdf</a>
47	8 R1, R7, R9, R10, R11, R12, R13, R14	Thick Film Resistors - SMD Thick Film Resistors - SMD 470 OHM 1%	Yageo	RC0805FR-07470RL	603-RC0805FR-07470RL	<a href="https://www.mouser.com/datasheet/2/181/R05_L_10-1564068.pdf">https://www.mouser.com/datasheet/2/181/R05_L_10-1564068.pdf</a>

48	6 R2, R3, R4, R5, R22, R23	Thick Film Resistors - SMD Thick Film Resistors - SMD 10K Ohm 1% Yageo	RC0805FR-0710KL	Mouse	603-RC0805FR-0710KL	<a href="https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf">https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf</a>	\$0.13	
49	8 R27	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 4.7Kohms 5% 100ppm	CRCW08054K0UNTA	Mouse	71-CRCW08054-4.7K	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-176215D.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-176215D.pdf</a>	\$0.12	
50	1 R8	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 4.7Kohms 5% 100ppm	CRCW080520R0FKEA	Mouse	71-CRCW0805-20-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
51	1 R17	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 30Kohms 1% 100ppm	CRCW080530K0FKEA	Mouse	71-CRCW0805-30K-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
52	1 R20, R57	Thick Film Resistors - SMD Thick Film Resistors - SMD 1kOhm 1%	RC0805FR-071KL	Mouse	603-RC0805FR-071KL	<a href="https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf">https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf</a>	\$0.13	
53	1 R21	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 40.2ohms 2% 100ppm	CRCW080540R2KTA	Mouse	71-CRCW0805-40.2	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-176215B.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-176215B.pdf</a>	\$0.16	
54	1 R28	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 63.4Kohms 1% 100ppm	CRCW080563K4FKEA	Mouse	71-CRCW0805-63.4K-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
55	3 R29, R30, R31	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 4.7Kohms 1% 100ppm	CRCW08054K70FKEA	Mouse	71-CRCW0805-4K7-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
56	2 R32, R34	Thick Film Resistors - SMD Thick Film Resistors - SMD 10K Ohm 1%	RC0805FR-0710KL	Mouse	603-RC0805FR-0710KL	<a href="https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf">https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf</a>	\$0.13	
57	2 R33, R36	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 100ohms 5% 200ppm	CRCW080510R0NEA	Mouse	71-CRCW080510R0NEA	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
58	2 R35, R37	Thick Film Resistors - SMD Thick Film Resistors - SMD 10K Ohm 1%	RC0805FR-0710KL	Mouse	603-RC0805FR-0710KL	<a href="https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf">https://www.mouser.com/datasheet/2/447/PLU_RC_Group_51_Rohs_L_10-166068.pdf</a>	\$0.13	
59	1 R38	Current Sensors Resistors - SMD Current Sense Resistors - SMD 1 Watt, 0.05ohms 1%	VIS1205FR0200FEA	Mouse	71-W5L1205FR0200FEA	<a href="https://www.vishay.com/doc/30373">https://www.vishay.com/doc/30373</a>	\$0.89	
60	1 R39	Thin Film Resistors - SMD Thin Film Resistors - SMD 1 Watt, 158Kohms 1%	CRCW1206LSBK1KEA	Mouse	71-CRCW1206-158K-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
61	1 R40	Thin Film Resistors - SMD Thin Film Resistors - SMD 10Kohms 1% 206.25mm Auto - Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 0.05ohms 1%	MCA12060D1002BFB500	Mouse	594-MCA12060D1002BFB5	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.51	
62	3 R41, R42, R45	Thick Film Resistors - SMD Thick Film Resistors - SMD 100mJumper	CR1206-1/000ELF	Mouse	652-CR1206-1/000ELF	<a href="https://www.mouser.com/datasheet/2/5/crxxxxxx-185836.pdf">https://www.mouser.com/datasheet/2/5/crxxxxxx-185836.pdf</a>	\$0.10	
63	6 R43, R44, R45, R47, R48, R49	SMD Dohm Jumper	CR1206-1/000E1F	Mouse	652-CR1206-1/000E1F	<a href="https://www.mouser.com/datasheet/2/5/crxxxxxx-185836.pdf">https://www.mouser.com/datasheet/2/5/crxxxxxx-185836.pdf</a>	\$0.10	
64	1 R50	Thin Film Resistors - SMD Thin Film Resistors - SMD 91Kohm 1% 25ppm	RT08059R0D0793IKL	Mouse	603-RT08059R0D0793IKL	<a href="https://www.mouser.com/datasheet/2/447/PLU_RT_1_to_01_Rohs_L_11-16606912.pdf">https://www.mouser.com/datasheet/2/447/PLU_RT_1_to_01_Rohs_L_11-16606912.pdf</a>	\$0.43	
65	1 R51	Thin Film Resistors - SMD Thin Film Resistors - SMD 1.8V 6.5K Ohm 1% 25ppm	RT08059R0D07649KL	Mouse	603-RT08059R0D07649KL	<a href="https://www.mouser.com/datasheet/2/447/PLU_RT_1_to_01_Rohs_L_11-16606912.pdf">https://www.mouser.com/datasheet/2/447/PLU_RT_1_to_01_Rohs_L_11-16606912.pdf</a>	\$0.43	
66	1 R52	Thick Film Resistors - SMD Thick Film Resistors - SMD 1 Watt, 1.1Mohms 1%	CRCW0805M10FKEA	Mouse	71-CRCW0805M10FKEA	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
67	1 R53	Thick Film Resistors - SMD Thick Film Resistors - SMD 10Watt 75Kohms 1% 100ppm	CRCW080575K0FKEA	Mouse	71-CRCW0805-75K-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
68	1 R54	Thick Film Resistors - SMD Thick Film Resistors - SMD 10Watt 28Kohms 1% 100ppm	CRCW080528K0FKEA	Mouse	71-CRCW0805-28K-E3	<a href="https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf">https://www.mouser.com/datasheet/2/427/dcrcw-3-1762152.pdf</a>	\$0.10	
69	1 R55	Thick Film Resistors - SMD Thick Film Resistors - SMD 0.05 2.46ohms 1% AEC-Q200	Panasonic	ERU6ENF2941V	Mouse	667-ERU6ENF2941V	<a href="https://www.mouser.com/datasheet/2/315/AOA0000C304-1140630.pdf">https://www.mouser.com/datasheet/2/315/AOA0000C304-1140630.pdf</a>	\$0.10
70	1 R56	Thin Film Resistors - SMD Thin Film Resistors - SMD 1.0Watt 75Kohms 1% 100ppm	Susumu	RR1220P-202-D	Mouse	754-RR1220P-202-D	<a href="https://www.mouser.com/datasheet/2/392/Asumu_RR_Data_Sheet-120638.pdf">https://www.mouser.com/datasheet/2/392/Asumu_RR_Data_Sheet-120638.pdf</a>	\$0.10
71	2 R51, R52	Current Sensors Resistors - SMD Current Sense Resistors - SMD 120E 0.010ohm 1% Curv Sense AEC-Q200	Panasonic	ERU8BWFR010V	Mouse	667-ERU8BWFR010V	<a href="https://www.mouser.com/datasheet/2/315/AOA0000C313-1141758.pdf">https://www.mouser.com/datasheet/2/315/AOA0000C313-1141758.pdf</a>	\$0.74
72	6 SW1, SW2, SW3, SW4, SW5, SW6	Tactile Switches Tactile Switches Top Actuated w/o Bezel w/ Bezel	Omrton	B3U-1000P	Mouse	653-B3U-1000P	<a href="https://www.mouser.com/datasheet/2/397/eh-13-3615.pdf">https://www.mouser.com/datasheet/2/397/eh-13-3615.pdf</a>	\$0.92
73	3 TP1, TP2, TP3	Circuit Board Hardware - PCB Test Point BLACK	Keystone Electronics	5001	Mouse	534-5001	<a href="https://www.mouser.com/datasheet/2/215/000-5004-741181.pdf">https://www.mouser.com/datasheet/2/215/000-5004-741181.pdf</a>	\$0.35
74	1 U1	Supervisory Circuits Supervisory Circuits Open Drain	Microchip	MCP111-240E/T	Mouse	579-MCP111-240E/T	<a href="https://www.mouser.com/datasheet/2/268/21889-b-04653.pdf">https://www.mouser.com/datasheet/2/268/21889-b-04653.pdf</a>	\$0.47
75	1 U2	16-bit Microcontrollers - MCU 16-bit Microcontroller - MCU	Texas Instruments	MSP430FR5941HM	Mouse	595-MSP430FR5941HM	<a href="https://www.ti.com/lit/pdf/scea0164">https://www.ti.com/lit/pdf/scea0164</a>	\$8.11
76	1 U3	Translation - Voltage Levels Translation - Voltage Levels 4-Bit Bidirectional V-Level Translator	Texas Instruments	TXB0104PWR	Mouse	595-TXB0104PWR	<a href="https://www.ti.com/lit/pdf/scea0164">&amp;gt;&amp;gt;url=https://ti.com/mic/2Ht6z2_Fgpnb2Efb010</a>	\$0.93
77	1 U4	Translation - Voltage Levels Translation - Voltage Levels 8-Bit Bidirectional V-Level Translator	Texas Instruments	TXB0108PWR	Mouse	595-TXB0108PWR	8	\$1.29

78	1 U5	Operational Amplifiers - Op Amps Operational Amplifiers - Op Amps Single 1.8V/1MHz	Microchip MCP6001T-J/OT	Mouse	579-MCP6001T-J/OT	<a href="https://www.mouser.com/datasheet/2/268/21731-740845.pdf">https://www.mouser.com/datasheet/2/268/21731-740845.pdf</a>	\$0.24
79	1 U6	Gate Drivers Gate Drivers 12V Industrial Relay Inductive Load	GN Semiconductor NUD3112LTIG	Mouse	863-NUD3112LTIG	<a href="https://www.onsemi.com/pub/Collateral/AN98116-D.PDF">https://www.onsemi.com/pub/Collateral/AN98116-D.PDF</a>	\$0.44
80	1 U7	Digital Potentiometer ICs Digital Potentiometer ICs Single 78 V 2C POT	Microchip MCP4531-103E/MS	Mouse	579-MCP4531-103E/MS	<a href="https://www.mouser.com/datasheet/2/268/DS_22096a-36467.pdf">https://www.mouser.com/datasheet/2/268/DS_22096a-36467.pdf</a>	\$0.70
81	1 U8	Power Isolators Digital Isolators Low-Power Isolators DC/DC	Texas Instruments ISO1540DR	Mouse	595-ISO1540DR	<a href="https://www.ti.com/lit/pdf/synt403a">https://www.ti.com/lit/pdf/synt403a</a>	\$4.51
82	1 U9	Battery Management Battery Management 3.5V/3.6A Multi-cell Lithium-on Step-Down Battery Charger with PowerPath and DC Telemetry Current & Power Monitors & Regulators Current & Power Monitors & Regulators Vfb Out Hi-Sd	Analog Devices Inc. LTC4162EUFD-SAD#PBF	Mouse	584-4162EUFD-SAD#PBF	<a href="https://www.mouser.com/datasheet/2/609/LTC4162_S-1398197.pdf">https://www.mouser.com/datasheet/2/609/LTC4162_S-1398197.pdf</a>	\$7.33
83	1 U10	Non-isolated DC/DC Converters Non-isolated DC/DC Converters	Texas Instruments INA194ADBYT	Mouse	595-INA194ADBYT	<a href="https://www.ti.com/lit/pdf/sylo228">https://www.ti.com/lit/pdf/sylo228</a>	\$2.89
84	1 U11	Non-isolated DC/DC Converters Non-isolated DC/DC Converters	Texas Instruments LMZM22360LV5SLT	Mouse	595-LMZM22360LV5SLT	<a href="https://www.ti.com/lit/pdf/syva834">https://www.ti.com/lit/pdf/syva834</a>	\$6.17
85	1 U12	DC/DC Converters	Texas Instruments LMZM22360LV5SLT	Mouse	595-LMZM22360LV5SLT	<a href="https://www.ti.com/lit/pdf/syjip015">https://www.ti.com/lit/pdf/syjip015</a>	\$6.17
86	1 U13	LDI/Voltage Regulators LDO Voltage Regulators 50mA 1.00V/5% Our pull/DIO Linear Reg	Texas Instruments TP574401DDNT	Mouse	595-TP574401DDNT	<a href="https://www.ti.com/lit/pdf/syjip015">https://www.ti.com/lit/pdf/syjip015</a>	\$2.81
87	1 U14	Switching Voltage Regulators Switching Voltage Regulators	Texas Instruments LM516LPWPR	Mouse	595-LM516LPWPR	<a href="https://www.mouser.com/datasheet/2/440/e_WIMA_MKS_2-001">https://www.mouser.com/datasheet/2/440/e_WIMA_MKS_2-001</a>	\$4.21
88	3 C22, C23, C24	Film Capacitors Film Capacitors 1.00V 47uF 10%	WIMA MKS20034701E0KSSD	Mouse	505-MKS2-47/100/10	<a href="https://www.mouser.com/datasheet/2/440/1138871.pdf">https://www.mouser.com/datasheet/2/440/1138871.pdf</a>	\$0.48
89	1 R16	Thick Film Resistors - SMD Thick Film Resistors - SMD 1/16watt 47Kohms 1% 100ppm	Vishay CRW080547K0RKEA	Mouse	71-CRW080547K0RKEA	<a href="https://www.mouser.com/datasheet/2/47/dcrwa-3-1762152.pdf">https://www.mouser.com/datasheet/2/47/dcrwa-3-1762152.pdf</a>	\$0.10
90	1 X1	Crystals Crystals 8MHz 20pF	Fox FOXS1F/080-20	Mouse	599-FOX080-20-LF	<a href="https://www.mouser.com/datasheet/2/160/C45D-1131563.pdf">https://www.mouser.com/datasheet/2/160/C45D-1131563.pdf</a>	\$0.27
91	2 C41, C43	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 1206 100pF 1000Vdc COG - 5%	Murata GRM11A5CA101JW0D	Mouse	81-LGRN31AC101JW0D	<a href="https://www.mouser.com/datasheet/2/281/GRM31AC101JW0D.pdf">https://www.mouser.com/datasheet/2/281/GRM31AC101JW0D</a>	\$0.52
92	1 C45	Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 0.01uf X_R 0805 10%	KEMET C0805X103K5RAC7210	Mouse	80-C0805X103K5R7210	<a href="https://www.mouser.com/datasheet/2/212/KEM_C1013_XTR_FT_Cap_SMD-1103280.pdf">https://www.mouser.com/datasheet/2/212/KEM_C1013_XTR_FT_Cap_SMD-1103280.pdf</a>	\$0.35
93	1 C53	Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 0.03uf X_R 0805 10%	KEMET C0805S33K5RACTU	Mouse	80-C0805S33K5RACTU	<a href="https://www.mouser.com/datasheet/2/212/Y/KEM_C1014_XR_FT_Cap_SMD-1102761.pdf">https://www.mouser.com/datasheet/2/212/Y/KEM_C1014_XR_FT_Cap_SMD-1102761.pdf</a>	\$0.41
94	2 C55, C56	Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 100pF CG 0805 5%	KEMET C0805C1015GACTU	Mouse	80-C0805C1015GACTU	<a href="https://www.mouser.com/datasheet/2/212/KEM_C1003_CG_S-MD-1101588.pdf">https://www.mouser.com/datasheet/2/212/KEM_C1003_CG_S-MD-1101588.pdf</a>	\$0.16
95	0 Y1	Crystals Crystals 32.768MHz 2.7PF -40C +95C ABRACON	ABSO166-32.768MHz-T	Mouse	815-ABSO166-32.768MHz-T	<a href="https://www.mouser.com/datasheet/2/122/ECK-34G-1064121.pdf">https://www.mouser.com/datasheet/2/122/ECK-34G-1064121.pdf</a>	\$0.66
96	1 Alternative Y1	Crystals 32.768MHz 6pF -40C +95C	ECS ECS-327-6-34G-TR	Mouse	520-327-6-34G-TR	<a href="https://www.mouser.com/datasheet/2/122/ECK-34G-1064121.pdf">https://www.mouser.com/datasheet/2/122/ECK-34G-1064121.pdf</a>	\$0.74

## APPENDIX D: TRANSMITTER BOM

ASSEMBLY NO:		DESCRIPTION		DATE:		PREPARED BY:		NOTES	
ITEM	QTY	REFERENCE	DESCRIPTION	MFG	MFG PN	VENDOR	VENDOR PN	Datasheet URL	Unit Price
1	1	R42	Thick Film Resistors - SMD Thick Film Resistors - SMD 1/8watt ZEROOhm Jumper	Vishay	CRCW0805000020EA	Mouse	71-CRCW0805-0-E3	<a href="https://www.mouser.com/datasheet/2/27/dcrcwe3-1762152.pdf">https://www.mouser.com/datasheet/2/27/dcrcwe3-1762152.pdf</a>	\$0.10
2	1	R8	Thick Film Resistors - SMD Thick Film Resistors - SMD 1/8watt 20ohms 3% 100ppm	Vishay	CRCW080520R0FKA	Mouse	71-CRCW0805-20-F-3	<a href="https://www.mouser.com/datasheet/2/27/dcrcwf-1762152.pdf">https://www.mouser.com/datasheet/2/27/dcrcwf-1762152.pdf</a>	\$0.10
3	1	R23	Thick Film Resistors - SMD Thick Film Resistors - SMD 1/8watt 40.2ohms 3% 100ppm	Vishay	CRCW080540R2FKTA	Mouse	71-CRCW0805-40.2	<a href="https://www.mouser.com/datasheet/2/27/dcrcw-1762150.pdf">https://www.mouser.com/datasheet/2/27/dcrcw-1762150.pdf</a>	\$0.16
4	2	R31, R32	Thick Film Resistors - SMD Thick Film Resistors - SMD 0805 47.0ohms 3% To AEC-Q200	Panasonic	ERI-6E-N47R0V	Mouse	667-ER-6E-N47R0V	<a href="https://www.mouser.com/datasheet/2/47/147/PYU_RC_Group_51_RoHS_L_10-1664068.pdf">https://www.mouser.com/datasheet/2/47/147/PYU_RC_Group_51_RoHS_L_10-1664068.pdf</a>	\$0.10
5	8	R1, R7, R9, R10, R11, R12, R13, R14	Thick Film Resistors - SMD Thick Film Resistors - SMD 470 OHM 1%, TEST POINT BLACK	Yageo	RC0805FR-07470RL	Mouse	603-RC0805FR-07470RL	<a href="https://www.mouser.com/datasheet/2/15/000-5004-741181.pdf">https://www.mouser.com/datasheet/2/15/000-5004-741181.pdf</a>	\$0.13
6	4	TP1, TP2, TP3, TP4	Circuit Board Hardware - PCB Circuit Board Hardware - PCB Electronics	Keystone	5001	Mouse	524-5001	<a href="https://www.mouser.com/datasheet/2/45/61/3016/11221-1717958.pdf">https://www.mouser.com/datasheet/2/45/61/3016/11221-1717958.pdf</a>	\$0.35
7	1	PS	Headers & Wire Holdings Header & Wire Housing VR-PHD 2.54mm Hat 16P Single Str Gold	Wurth Elektronik	6130161121	Mouse	710-6130161121	<a href="https://www.mouser.com/datasheet/2/15/000-503V35IBL-321080.pdf">https://www.mouser.com/datasheet/2/15/000-503V35IBL-321080.pdf</a>	\$0.90
8	4	D13, D14, D15, D16	ESD Suppressors /TVS Diodes ESD Suppressors / TVS Diodes	Diodes Incorporated	DESD303518U-7B	Mouse	621-DE-SD303518U-7B	<a href="https://www.mouser.com/datasheet/2/15/000-503V35IBL-321080.pdf">https://www.mouser.com/datasheet/2/15/000-503V35IBL-321080.pdf</a>	\$0.29
9	16	C50, C51, C52, C53	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 0.1uf 2.5V	Yageo	CC0805K87R7BB474	Mouse	603-CC0805K87R7BB474	<a href="https://www.mouser.com/datasheet/2/81/GQM2195C21E1R678IBI-D-1102033.pdf">https://www.mouser.com/datasheet/2/81/GQM2195C21E1R678IBI-D-1102033.pdf</a>	\$0.13
10	1	C13	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 270nF 16V X7R 10%	Yageo	CC0805K87R7BB474	Mouse	603-CC0805K87R7BB474	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.23
11	2	C35, C45	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 20volts 1.6uF 250pf COG 0.10PF	Murata	GDM2195C21E166B12D	Mouse	81-GDM2295C2E166B12D	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.14
12	3	C36, C38, C46	Multilayer Ceramic Capacitors MLCC - SMD/SMT 10%	KEMET	CD805C10KSPACTU	Mouse	80-C0805C10KSP	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.14
13	1	R24	Thin Film Resistors - SMD Thin Film Resistors - SMD 1/8W 10K 10% ohm 1.3% 25ppm	Yageo	RT0805BRD07105KL	Mouse	603-RT0805BRD07105KL	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.43
14	6	R22	Thin Film Resistors - SMD Thick Film Resistors - SMD 10K OHM 1% T: 1.6mm	Yageo	RC0805FR-0710KL	Mouse	603-RC0805FR-0710KL	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.13
15	1	R29	Thick Film Resistors - SMD Thick Film Resistors - SMD 10K %	Bourns	CR0805-1W-103ELF	Mouse	652-CR0805-1W-103ELF	<a href="https://www.mouser.com/datasheet/2/54/Crxxxx-1858351.pdf">https://www.mouser.com/datasheet/2/54/Crxxxx-1858351.pdf</a>	\$0.10
16	6	C20, C26, C30, C31, C41, C42	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 2206 10V X5R 10%	TDK	C3216X5R-H106K160A8	Mouse	810-C3216X5R-H106K	<a href="https://product.tdk.com/info/en/catalog/datasheets/mlcc_commercial_general_en.pdf?ref_dlytmouse">https://product.tdk.com/info/en/catalog/datasheets/mlcc_commercial_general_en.pdf?ref_dlytmouse</a>	\$0.85
17	2	C10, C11	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 12pF COG 0805 5%	KEMET	CD805C12056ACTU	Mouse	80-C0805C12056	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.11
18	1	V2	Standard Clock Oscillators Standard Clock Oscillators 13.5MHz 50ppm -40C +85C	Epson	SGS0325CAN 3.5 6600004f T/G3	Mouse	732-SGS0325CAN 3.5 6600004f T/G3	<a href="https://www.mouser.com/datasheet/2/137/SGS0325CAN_en-86-15956.pdf">https://www.mouser.com/datasheet/2/137/SGS0325CAN_en-86-15956.pdf</a>	\$1.17
19	1	R20	Thick Film Resistors - SMD Thick Film Resistors - SMD 1K OHM 1%	Yageo	RC0805FR-071KL	Mouse	603-RC0805FR-071KL	<a href="https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/11/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.13
20	2	R35, R40	Thick Film Resistors - SMD Thick Film Resistors - SMD 2512 1Kohms 1% To AEC-Q200	Panasonic	EBI-1TNE100IU	Mouse	667-ER-1TNE100IU	<a href="https://www.mouser.com/datasheet/2/15/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/15/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.63
21	2	R36, R41	Thick Film Resistors - SMD Thick Film Resistors - SMD 0805 1Kohms 5% AEC-Q200	Panasonic	ERI-6GEV102V	Mouse	667-ER-6GEV102V	<a href="https://www.mouser.com/datasheet/2/15/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf">https://www.mouser.com/datasheet/2/15/000-5004-747/PYU_RT_1_to_0.1_Rto-50V-115300.pdf</a>	\$0.10

22	2 R30, R37	"Thick Film Resistors - SMD Thick Film Resistors - SMD 2512 1Mohms 1% To AEC-Q200 Thick Film Resistors - SMD 0805 1.0Mohms 0.5% V 1% Tol AEC-Q200	Panasonic	ERI-1TY105U	Mouser	667-ERI-1TY105U	https://www.mouser.com/datasheet/2/315/AOA000C301-1488782.pdf	\$0.46
23	3 R33, R34, R39	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 1.0uf 10V X7R 10%	Panasonic	ERI-P06F100AV	Mouser	667-ERI-P06F100AV	https://www.mouser.com/datasheet/2/315/AOA000C331-114874.pdf	\$0.18
24	4 C1, C3, C5, C7	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 2200uF X8R 0805 KE/MET	Yageo	CC0805KX7R6BB1L05	Mouser	603-CC0805KX7R6BB105	https://www.mouser.com/datasheet/2/212/KEM_C1007_X8R_ULT-RA-150C-SMD-110Z703.pdf	\$0.25
25	1 C12	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 2200uF X8R 0805 5%	KE/MET	CD8025KX2215HACTU	Mouser	802-C08025KX2215HACTU	https://www.mouser.com/datasheet/2/212/KEM_C1007_X8R_ULT-RA-150C-SMD-110Z703.pdf	\$0.69
26	3 C16, C17, C18	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 1201 1000 2.2uF 7R 10% T2.3mm Headers & Wire Housings Headers & Wire Housings 3P VERT HEADER Sn	TDK	C3225XTR2A225K2304AB	Mouser	810-C3225XTR2A225K2304AB	https://product.tdk.com/info/en/catalog/datasheets/miccc_comme_rcial_micccage_en.pdf?ref=disty-mouser	\$0.70
27	4 JP1, P2, P4, P6	"Thin Film Resistors - SMD Thin Film Resistors SMD 1/8W 38.7K ohm 1% 50ppm	Yageo	RT0805FR0728K7L	Mouser	603-RT0805FR0728K7L	https://www.mouser.com/datasheet/2/447/PvU_RT_1_to_0_1_R-oh5_L-11-669912.pdf	\$0.12
28	1 R27	"Thin Film Resistors - SMD Thin Film Resistors SMD 1/8W 38.7K ohm 1% 50ppm	Yageo	RT0805BRD073K4L	Mouser	603-RT0805BRD073K4L	https://www.mouser.com/datasheet/2/447/PvU_RT_1_to_0_1_R-oh5_L-11-669912.pdf	\$0.12
29	1 R26	"Thin Film Resistors - SMD Thick Film Resistors - SMD 1/8W 3.4K ohm 1% 25ppm	Vishay	CRCW080530R0KHEA	Mouser	603-RT080530R0KHEA	https://www.mouser.com/datasheet/2/447/PvU_RT_1_to_0_1_R-oh5_L-11-669912.pdf	\$0.43
30	1 R19	"Thin Film Resistors - SMD Thick Film Resistors - SMD 1/8W 3.4K 300ohms 1% 100ppm	Vishay	CRCW080530R0KHEA	Mouser	71-CRCW080530K_E3	https://www.mouser.com/datasheet/2/427/dccwe3-176152.pdf	\$0.10
31	0 Y1	"Crystals Crystals 32.768kHz 10pf 7PF -40C +85C	ABRAVON	AB50-166-32.768kHz-T	Mouser	815-AB50-166-32.768kHz-T	https://www.mouser.com/datasheet/2/122/ECX-34G-064121.pdf	\$0.66
32	1 Alternate Y1	"Crystals 32.768kHz 6pf -40C +85C	ECS	ECS-3276-34G-TR	Mouser	520-3276-34G-T	https://www.mouser.com/datasheet/2/122/ECX-34G-064121.pdf	\$0.74
33	1 L1	"Fixed Inductors Fixed Inductors WE-PD 330uh 170mA ICR=750mOhms AECQ200	Wurth Elektronik	7447714331	Mouser	710-7447714331	https://www.mouser.com/datasheet/2/445/447714331-172496.pdf	\$2.17
34	1 12	"Headers & Wire Housings Headers & Wire Housings FRICTION TE Connectivity 3-441215-5	Vishay	TNPW0805365KBEEN	Mouser	571-3-641215-5	https://www.vishay.com/doc?28771	\$1.45
35	1 R25	"Thin Film Resistors - SMD 365Kohms 1% 25ppm	Vishay	TNPW0805365KBEEN	Mouser	71-TNPW0805365KBEEN	https://www.vishay.com/doc?28771	\$1.45
36	1 C22	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 50V 36pF COG 0805 5% KE/MET	Yageo	CD8025C3605GACTU	Mouser	80-C08025C3605G	https://www.mouser.com/datasheet/2/212/KEM_C1003_C06_SM-D-10158.pdf	\$0.29
37	2 C8, C9	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 25V 0.047uF COG 0805 5% KE/MET	Yageo	CD8025C3905GACTU	Mouser	80-C08025C3905G	https://www.mouser.com/datasheet/2/212/KEM_C1003_C06_SM-D-10158.pdf	\$0.24
38	4 R6, R15, R17, R18	"Thick Film Resistors - SMD Thick Film Resistors - SMD 1/8Watt 47Kohms 1% 200ppm	Vishay	CRCW08054K70INTA	Mouser	71-CRCW08054K70INTA	https://www.mouser.com/datasheet/2/427/dccw-176150.pdf	\$0.12
39	1 R16	"Thick Film Resistors - SMD Thick Film Resistors - SMD 1/8Watt 47Kohms 1% 200ppm	Vishay	CRCW08054K70KHEA	Mouser	71-CRCW08054K70KHEA	https://www.mouser.com/datasheet/2/427/dccw-176152.pdf	\$0.10
40	1 C24	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 25V 0.047uF COG 0805 5%	KE/MET	CD8025C4735GACTU	Mouser	80-C08025C4735G	https://product.tdk.com/info/en/catalog/datasheets/miccc_comme_rcial_general_en/pdf?ref=disty-mouser	\$0.72
41	2 C21, C27	"Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MLCC - SMD/SMT 1206 2.5VDC 47PF 20% 25p 1.6nm	TDK	C32105XRIE476M160AC	Mouser	810-C32105XRIE476M160AC	https://www.mouser.com/datasheet/2/212/KEM_C1003_C06_SM-W-Series-1-101665.pdf	\$1.05
42	1 C23	"Multilayer Ceramic Capacitors MLCC - SMD/SMT 25V 0.047uF COG 0805 5%	Murata	GRM1215C1H682F401D	Mouser	81-GRM1215C1H682F401D	https://www.mouser.com/datasheet/2/231/murata-032052018_GR-119652.pdf	\$0.27
43	1 R28	"Thin Film Resistors - SMD 0805 732Kohm 0.1% 25ppm	Panasonic	ERA-GAEB732V	Mouser	80-C08054R08020	https://www.mouser.com/datasheet/2/315/AOA000C307-	
44	1 Y1	"Crystals/Ceritals 50MHz 200ppf	Fox	FOYS1L-FN8020	Mouser	80-C08054R08020	https://www.mouser.com/datasheet/2/150/C45D11131561.pdf	

45	6 SW1, SW2, SW3, SW4 SW5, SW6	Tactil Switches Tactile Switches Top Actuated w/o cross w/o ground	Omrion	B3U-1000P	Mouser	653-B3U-1000P	<a href="https://www.mouser.com/datasheet/2/307/en-b3u-3615.pdf">https://www.mouser.com/datasheet/2/307/en-b3u-3615.pdf</a>	\$0.92
46	2 D20, D21	Schottky Diodes & Rectifiers Schottky Diodes & Rectifiers Silicon Schottky Diode	Infineon	BA514DWE622HT5A1	Mouser	726-BA514DWE622HT5A	<a href="https://www.mouser.com/datasheet/2/106/infinion-BA514DWE622HT5A1.pdf">https://www.mouser.com/datasheet/2/106/infinion-BA514DWE622HT5A1.pdf</a>	\$0.48
47	2 C28, C39	Trimmer / Variable Capacitors Trimmer / Variable Capacitors TRIMMER CAPACITOR	Vishay	BFC280332659	Mouser	594-222-808-2659	<a href="https://www.vishay.com/doc?28528">https://www.vishay.com/doc?28528</a>	\$7.21
48	4 C32, C34, C43, C44	Multilayer Ceramic Capacitors MLCC - SMD/SMT Multilayer Ceramic Capacitors MCC - SMD/SMT 1.00pf-3kV 100% 5%	Vishay	VH1812A101XGAT	Mouser	77-VH1812A101XGAT	<a href="https://www.mouser.com/datasheet/2/427/vjcommercialseries-176445.pdf">https://www.mouser.com/datasheet/2/427/vjcommercialseries-176445.pdf</a>	\$0.76
49	1 C15	Aluminum Organic Polymer Capacitors Aluminum Organic Polymer Capacitors 500volts 68nF 65°C 20mohm	Panasonic	SOSPF68M	Mouser	667-SOSPF68M	<a href="https://www.mouser.com/datasheet/2/315/AABB000C77-947360.pdf">https://www.mouser.com/datasheet/2/315/AABB000C77-947360.pdf</a>	\$2.65
50	6 D5, D4, D11, D12, D17, D18	ESD Suppressors / TVS Diodes ESD Suppressors / TVS Diodes Low Cap BiTS Opt. 3.3V 3.8V br 25kV	Diodes Incorporated	DESD351BL-TB	Mouser	621-DESD351BL-TB	<a href="https://www.mouser.com/datasheet/2/115/ESD351BL-321080.pdf">https://www.mouser.com/datasheet/2/115/ESD351BL-321080.pdf</a>	\$0.29
51	1 R38	Thick Film Resistors - SMD Thick Film Resistors - SMD 0805 47.0ohms 2% Tol AlfcQ200	Panasonic	EPR46EN647R0V	Mouser	657-ER46EN647R0V	<a href="https://www.mouser.com/datasheet/2/115/AOA000C304-1149620.pdf">https://www.mouser.com/datasheet/2/115/AOA000C304-1149620.pdf</a>	\$0.10
52	1 Q1	N-Channel 200V 8.5A Ta Surface Mount Diode	EPIC	EPIC2019	Digitkey	917-1087-2-RD	<a href="https://www.digitkey.com/epic/documents/documents/datasheets/EPC2019_datasheet.pdf">https://www.digitkey.com/epic/documents/documents/datasheets/EPC2019_datasheet.pdf</a>	3.54
53	1 Q2	N-Channel 200V 48A Ta Surface Mount Diode	EPIC	EPIC2034C	Digitkey	917-1214-2-ND	<a href="https://www.digitkey.com/epic/documents/documents/datasheets/EPC2034C_data_sheet.pdf">https://www.digitkey.com/epic/documents/documents/datasheets/EPC2034C_data_sheet.pdf</a>	7.32
54	2 L4, L5	Fixed Inductors Fixed Inductors 47uH 20%	Vishay	IHL-P4020DZER470W11	Mouser	71-HLP4020DZER470W11	<a href="https://www.vishay.com/doc?24251">https://www.vishay.com/doc?24251</a>	\$2.58
55	1 J1	DC Power Connectors DC Power Connectors 4P JACK SKT SHIELDED SNAP AND LOCK	Kycon	KPJ4-5-S	Mouser	806-KPJ4-5-S	<a href="https://www.snapeda.com/part/KPJ4-5-S#Kycon/view-part/tref/mouser">https://www.snapeda.com/part/KPJ4-5-S#Kycon/view-part/tref/mouser</a>	\$2.23
56	1 U11	Gate Driver Gate Drivers Tiny 7A MOSFET Gate Driver Non-Isolated DC/DC Converters	Teas Instruments	LMS512M07/NOPB	Mouser	926-LMS512M07/NOPB	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$1.31
57	1 U9	Non-Isolated DC/DC Converters Non-Isolated DC/DC Converters	Teas Instruments	LWZN23600V03SLIR	Mouser	595-LWZN23600V03SLIR	<a href="https://www.ti.com/lit/pdf/sna9807a">https://www.ti.com/lit/pdf/sna9807a</a>	\$4.52
58	1 U10	Non-Isolated DC/DC Converters Non-Isolated DC/DC Converters	Teas Instruments	LWZN23600V05SLIR	Mouser	595-LWZN23600V05SLIR	<a href="https://www.ti.com/lit/pdf/sna9807a">https://www.ti.com/lit/pdf/sna9807a</a>	\$4.52
59	1 U1	Supervision Circuits Supervisory Circuits Open Drain Digital Potentiometer IC Digital Potentiometer (5 Seg) 7V Microchip	Microchip	MCP111T-240E/TT	Mouser	579-MCP111T-240E/TT	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$0.47
60	1 U7	12C POT Operational Amplifiers - Op Amps Operational Amplifiers - Op Amps Single 1.8V 1MHz	Microchip	MCP4531-103E/MS	Mouser	579-MCP4531-103E/MS	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$0.70
61	1 U5	Operational Amplifiers - Op Amps Operational Amplifiers - Op Amps Single 1.8V 1MHz	Microchip	MCP6001T-J/OT	Mouser	579-MCP6001T-J/OT	<a href="https://www.ti.com/lit/pdf/sna9805">https://www.ti.com/lit/pdf/sna9805</a>	\$0.24
62	2 L2, L3	Ferrite Beads Ferrite Beads 600 ohms 25% HIGH CURRENT	Bourns	MH3261-601Y	Mouser	652-MH3261-601Y	<a href="https://www.ti.com/lit/pdf/sna9805">https://www.ti.com/lit/pdf/sna9805</a>	\$0.10
63	2 F2, F3	Resettable Fuses - PPTC Resettable Fuses - PPTC 5A 13.2V 40A Imax	Microchip	MICROSMID050F-2	Mouser	650-MICROSMID050F-2	<a href="https://www.ti.com/lit/pdf/sna9805">https://www.ti.com/lit/pdf/sna9805</a>	\$0.47
64	1 U2	16-bit Microcontrollers - MCU 16-bit Microcontrollers - MCU	Teas Instruments	MSPA30FR59341PM	Mouser	595-MSPA30FR59341PM	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$8.11
65	1 U6	Gate Drivers Gate Drivers 12V Industrial Relay Inductive Load ON Semiconductor	ON Semiconductor	NUD312LT1G	Mouser	853-NUD312LT1G	<a href="http://www.onsemi.com/pub/Collateral/AN0816-D.PDF">http://www.onsemi.com/pub/Collateral/AN0816-D.PDF</a>	\$0.44
66	1 F1	Resettable Fuses - PPTC Resettable Fuses - PPTC Radial Lead 2.5A 27V 40A Imax	RXF250		Mouser	650-RXF250	<a href="https://www.ti.com/lit/pdf/sna9805">https://www.ti.com/lit/pdf/sna9805</a>	\$0.63
67	2 P7, P9	Headers & Wire Housings Headers & Wire Housings VR-PHD 2.54mm SMT GP Hd Dual Srt.	Würth Elektronik	61000612121	Mouser	710-61000612121	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$0.93
68	1 D19	Schottky Diodes & Rectifiers Schottky Diodes & Rectifiers 3.0 Amp 100 Volt	Vishay	SS3H10-E3/5/T	Mouser	625-SS3H10-E3	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$0.60
69	1 U8	Switching Voltage Regulators Switching Voltage Regulators 3.5 60V 2.5MHz Step Down Converter	Teas Instruments	TP554260SGQR	Mouser	595-TP554260SGQR	<a href="https://www.ti.com/lit/pdf/sna9806">https://www.ti.com/lit/pdf/sna9806</a>	\$3.50
70	1 U3	Translation - Voltage Levels Translation - Voltage Levels 4-Bit Bi-directional V-level Translator	Teas Instruments	TXB0104PWR	Mouser	595-TXB0104PWR	<a href="https://www.ti.com/general/docs/supporinfo/tso2disid-24286otd041">https://www.ti.com/general/docs/supporinfo/tso2disid-24286otd041</a>	\$0.93
71	1 U4	Translation - Voltage Levels Translation - Voltage levels 8-Bit Bi-directional V-level Translator	Teas Instruments	TXB0108PWR	Mouser	595-TXB0108PWR	<a href="https://www.ti.com/general/docs/supporinfo/tso2disid-24286otd041">https://www.ti.com/general/docs/supporinfo/tso2disid-24286otd041</a>	\$1.29

72	1	L1A	Fixed Inductors Fixed Inductors 330uH Smd 10% 1.7A 360mOhms AECQ22	Colcraft	MGS1210-334KED	Mouser	994-MGS1210-334KED	<a href="https://www.mouser.com/datasheet/2/597/mgs1210-270677.pdf">https://www.mouser.com/datasheet/2/597/mgs1210-270677.pdf</a>	\$2.26
73	1	L1B	Fixed Inductors Fixed Inductors WEPD 330uH 1.5A DC-R430mOhms AECQ200	Wurth Elektronik	7447709331	Mouser	710-7447709331	<a href="https://www.mouser.com/datasheet/2/445/7447709331-1722838.pdf">https://www.mouser.com/datasheet/2/445/7447709331-1722838.pdf</a>	\$2.41
74	1	L1C	Fixed Inductors Fixed Inductors PA4320 12x12mm 33uH 1.7A 340mOhms	Pulse	PA4320.33ANLT	Mouser	673-PA4320.33ANLT	<a href="https://www.mouser.com/datasheet/2/336/P787-1526943.pdf">https://www.mouser.com/datasheet/2/336/P787-1526943.pdf</a>	\$2.57
75	8	D1, D2, D5, D6, D7, D8, D9, D10	Standard LEDs - SMD Standard LEDs - SMD Red Diffused 625nm 3.0mcd	Broadcom Limited	HBM5-C150	Mouser	630-HM5-C150	<a href="https://www.mouser.com/datasheet/2/678/bv02-055ten-ds-hms-c0xx-05mar2012-1827673.pdf">https://www.mouser.com/datasheet/2/678/bv02-055ten-ds-hms-c0xx-05mar2012-1827673.pdf</a>	\$0.41
76	1	M01	Bluetooth Modules (802.15.1) Bluetooth Modules (802.15.1) Bluetooth Low Energy BLE Module, Shielded, Antenna, ASCII Interface, 12x22mm	Microchip	RN4470-I/RM140	Mouser	579-RN4470-I/RM140	<a href="https://www.mouser.com/datasheet/2/668/RN4470-71-Bluetooth-Low-Energy-Module-Data-Sheet-D-165854.pdf">https://www.mouser.com/datasheet/2/668/RN4470-71-Bluetooth-Low-Energy-Module-Data-Sheet-D-165854.pdf</a>	\$7.38
77	1	P3	Headers & Wire Housings, Headers & Wire Housings, VR-PhDI 1.27mm Hdri 14P Dual Str Gold	Wurth Elektronik	62201421121	Mouser	710-62201421121	<a href="https://www.mouser.com/datasheet/2/445/62201421121-1718302.pdf">https://www.mouser.com/datasheet/2/445/62201421121-1718302.pdf</a>	\$1.48

## APPENDIX E: WIRELESS POWER TRANSFER MODULE BOM

ITEM	QTY	REFERENCE	DESCRIPTION	MFG	MFG P/N	VENDOR	VENDOR P/N	Datasheet URL	NOTES	Unit Price
1	1	RECEIVER	Desktop AC Adapters 65W 48V/out	TDK-Lambda	D162PWA480D	Mouse	967-D162PWA480D	<a href="https://www.mouser.com/datasheet/2/400/dt62-801-e-182570.pdf">https://www.mouser.com/datasheet/2/400/dt62-801-e-182570.pdf</a>		\$53.00
2	1	RECEIVER / TRANSMITTER	Electrical Enclosures IP68/NEMA GP Plastic Enclosure 5.88" x 4.36" x 2.19" Opaque	Bud Industries	PU-16537	Mouse	967-D162PWA480D	<a href="https://www.mouser.com/catalog/specsheets/Bud_PU-20Series_NEMA_6PWP68_Pc_Enclosure.pdf">https://www.mouser.com/catalog/specsheets/Bud_PU-20Series_NEMA_6PWP68_Pc_Enclosure.pdf</a>	Custom made	\$25.30
3	1	RECEIVER	Printed Circuit Board	JLC PCB		JLC PCB				\$6.68
4	1	TRANSMITTER	Printed Circuit Board	JLC PCB		JLC PCB				\$6.69
5	0.1	COIL RECEIVER	Hook-up Wire 14AWG 19/27 PTFE Spool 304.8 m	Alpha Wire	5859 R0005	Mouse	602-5859-100-03	<a href="https://www.mouser.com/datasheet/2/14/AW_Product_Specification-18737536.pdf">https://www.mouser.com/datasheet/2/14/AW_Product_Specification-18737536.pdf</a>		\$1.98
6	0.1	COIL TRANSMITTER	Hook-up Wire 14AWG 19/27 PTFE Spool 304.8 m	Alpha Wire	5859 R0005	Mouse	602-5859-100-03	<a href="https://www.mouser.com/datasheet/2/14/AW_Product_Specification-18737536.pdf">https://www.mouser.com/datasheet/2/14/AW_Product_Specification-18737536.pdf</a>		\$1.98
7	4	COIL RECEIVER / TRANSMITTER	Terminals SOLUS DIN 05-1.0 TE Connectivity		105291	Mouse	571-165291			\$0.45
8	0.67	COIL RECEIVER	Super-Conductive 101 Copper Tubes/Copper Tubing 1/8" 5ft spool	Mcmaster-Carr	8965K22	Mcmaster-Carr	8965K22	<a href="https://www.mcmaster.com/tubing/pdf/1_8/material-copper/">https://www.mcmaster.com/tubing/pdf/1_8/material-copper/</a>		\$6.94
9	0.67	COIL TRANSMITTER	Super-Conductive 101 Copper Tubes/Copper Tubing 1/8" 5ft spool	Mcmaster-Carr	8965K22	Mcmaster-Carr	8965K22	<a href="https://www.mcmaster.com/tubing/pdf/1_8/material-copper/">https://www.mcmaster.com/tubing/pdf/1_8/material-copper/</a>		\$6.94
10	1	1 Receiver	RRCS-Mbus Cable	RRCS-Mbus	Cable	Mouse	328-RRCSMBUSCABLE	<a href="https://www.mouser.com/datasheet/2/826/DS_SM_Bus_Battery_Cable_B-1360935.pdf">https://www.mouser.com/datasheet/2/826/DS_SM_Bus_Battery_Cable_B-1360935.pdf</a>		\$22.35
11	2	COIL RECEIVER / TRANSMITTER	Enclosures, Boxes, & Cases SENSOR CUBE WHITE	New Age Enclosures	789-S1A-40012	Mouse	789-S1A-40412	<a href="https://www.mouser.com/datasheet/2/230/NewAgeEnclosures_12092019_40012_cube_11_0-1673104.pdf">https://www.mouser.com/datasheet/2/230/NewAgeEnclosures_12092019_40012_cube_11_0-1673104.pdf</a>	Coil enclosure	\$5.70

## APPENDIX F: DIMENSIONAL COIL DRAWING

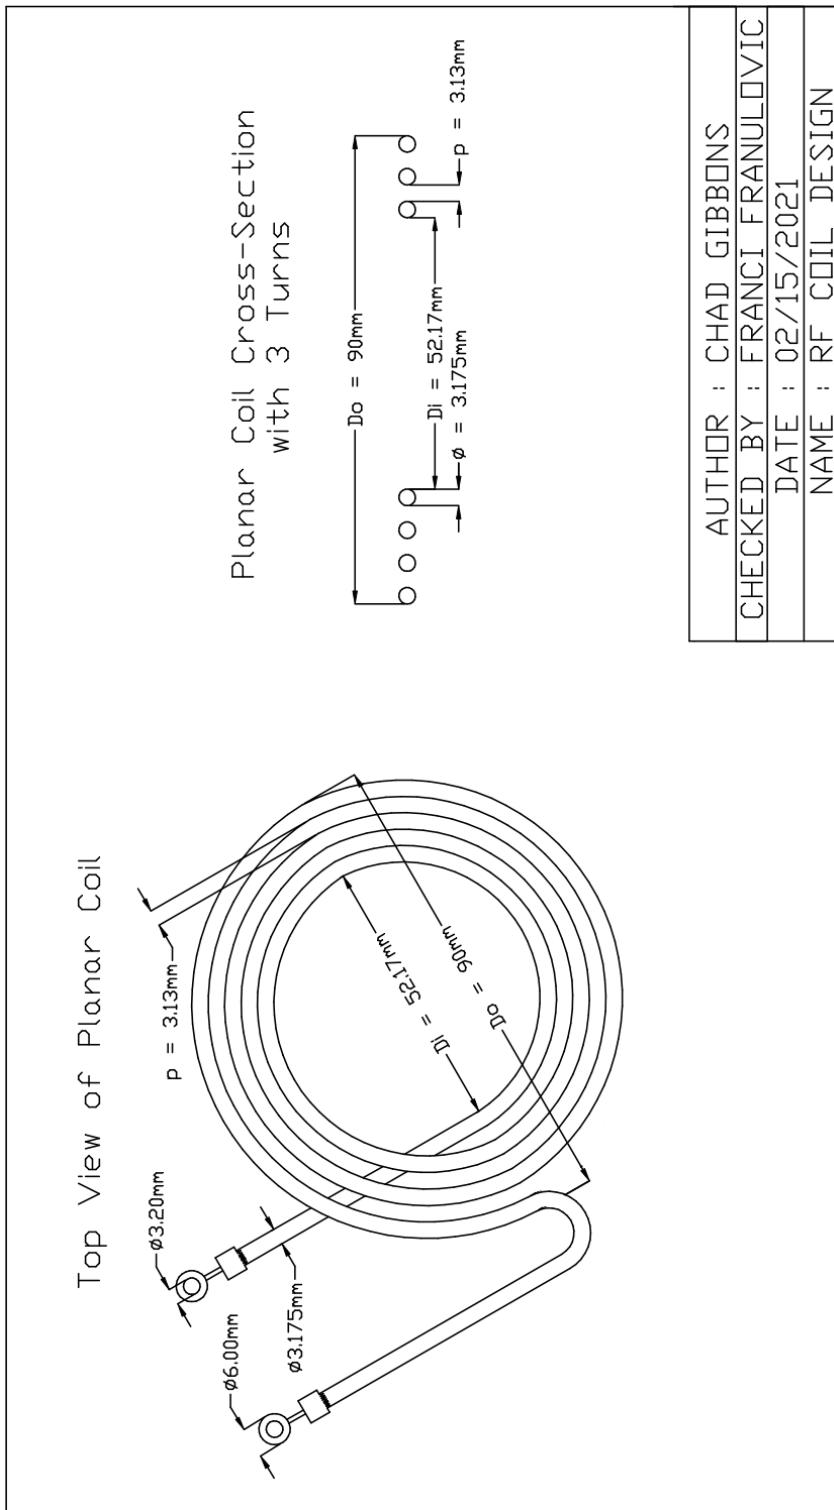


Figure 25: Dimensional Coil Drawing

## APPENDIX G: GUI WIREFRAME DIAGRAM

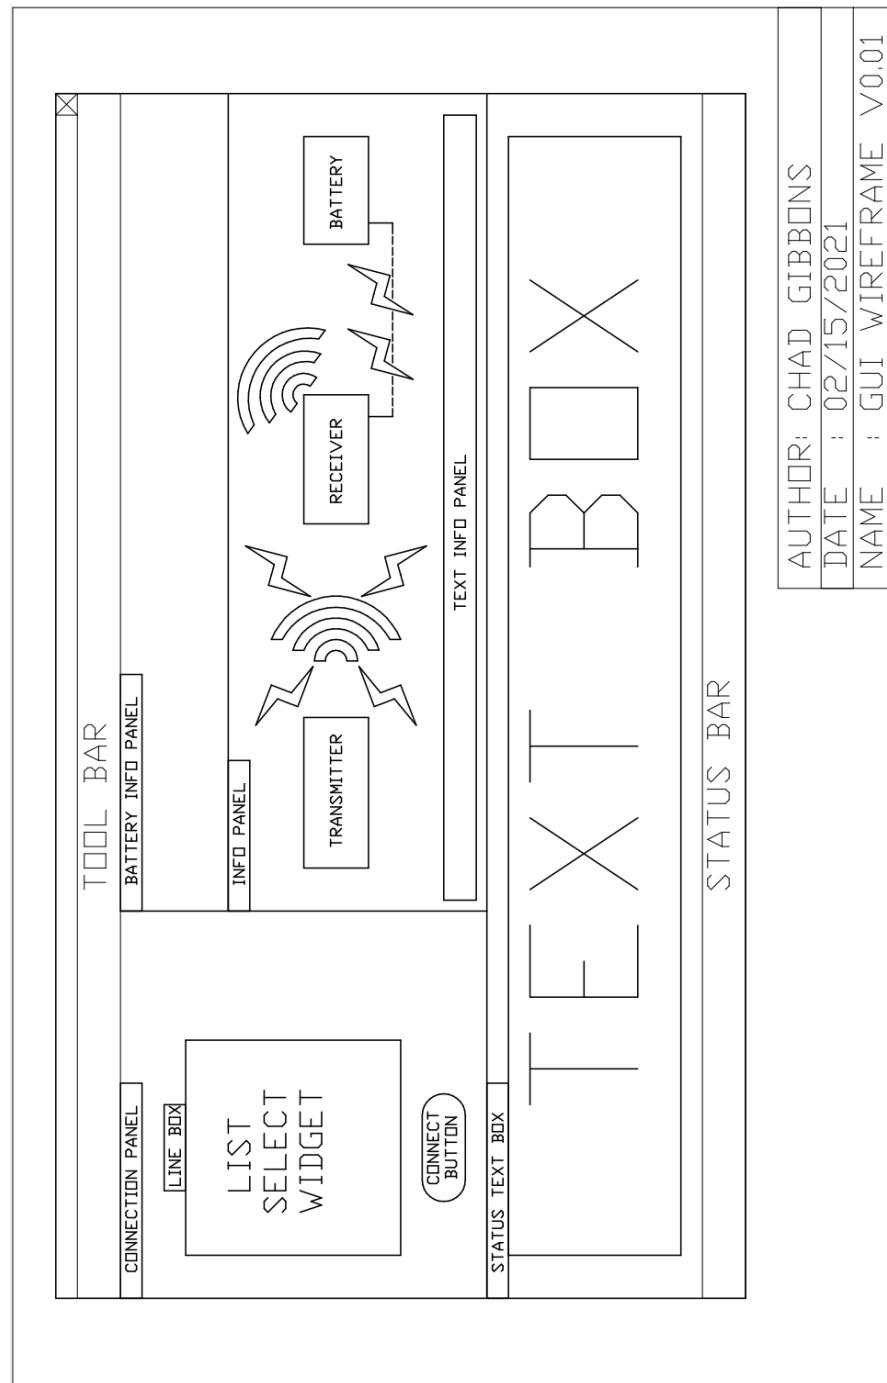


Figure 26: GUI Wireframe Diagram