

GIBO



FOCUS ON
SMART KITCHEN & BATHROOM

FUJIAN GIBO KITCHEN AND BATH TECH CO.,LTD

2023

福建洁博利厨卫科技有限公司
FUJIAN GIBO KITCHEN AND BATH TECH CO.,LTD.

Address 1: Building 54, Area B, Pushang industrial park, Cangshan district,
Fuzhou city, Fujian province, 350008, China.

Address 2: Building 3, Liangyuan science park, Hi-tech district, Fuzhou city,
Fujian province, 350109, China

Email: sales1@gibol.com.cn

Website: www.gibo.com.cn

■ 20⁺

More than 20 years of experience in the sensor sanitary ware industry

■ 180⁺

More than 180 technology and product patents

Gibo is a leading intelligent kitchen and bathroom expert in China, focusing on the research and development, production, and sales of intelligent kitchen and bathroom products as a national high-tech enterprise.

The company has over 100 employees and a technical team of over 15, with the cumulative ownership of 185 patents. There are 2 technology companies and 2 factories, with an area of over 5000m² and 7 production lines. The monthly production capacity of sensors exceeds 60000, and the monthly production capacity of finished products exceeds 30000 sets. The product has passed various international certifications, including CE, ROHS, FCC, CUPC, NSF, etc. Providing OEM&ODM services to over 50 famous bathroom brands. We can provide customers with a comprehensive one-stop service from intelligent solution design, product development, testing, production, and export. Looking forward to working with you!

PATENTS



Patent number
ZL 2011 1 0090047.8



Patent number
ZL 2015 1 0621320.3



Patent number
ZL 2012 1 0018517.4



Patent number
ZL 2012 1 0576859.8



Patent number
ZL 2020 2 0415304.5



Patent number
ZL 2019 2 2113033.8

FACTORY CERTIFICATIONS



BSCI



ISO 14001



ISO 45001



ISO 9001

PRODUCTS CERTIFICATIONS



CE



ROHS




CE



NSF



CUPC



FCC

SENSOR PRODUCTION PROCESS

Taking quality and safety as the fundamental principle,
striving for excellence and creating professional intelligent kitchen and bathroom products

100% INSPECTION FOR ALL ELECTRIC PARTS

Battery boxes

Install the batteries to testing

Solenoid valves

Test the resistance, water leak,
air leak and artificial load

Wires

Test the insulation resistance

Power adapters

Test the function, performance,
artificial load, and final product

Sensors

Test the function, performance,
mode, seal and artificial load



FINISHED PRODUCT PRODUCTION PROCESS

Centered on user experience,
continuously innovating to meet the new needs of kitchen and bathroom technology



CONTENTS

01

ABOUT US

- Company Introduction 01
- Qualification 02
- Sensor production process 03-04
- Finished product production process 05-06
- Contents 07-08

02

PRODUCTS

- Sensor faucet adapter 9-10
- Kitchen sensor faucet 11-12
- Basin sensor mixer 13-14
- Basin sensor faucet 15-16
- Sensor soap dispenser 17-18
- Sensor soap faucet 19-20
- Sensor urinal flusher 21-24
- Integrated sensor urinal flusher 25-26
- Sensor toilet flusher 27-30
- Sensor ceramic urinal 31-33
- Ceramic urinal 34

03

SOLUTIONS

1—The solution of Infrared sensor control system

- Kitchen sensor faucet control system 37-38
- Basin sensor faucet control system 40-41
- Basin sensor mixer control system 42-43
- Sensor soap faucet control system 44
- Bathroom dual sensor mixer control system 45-46
- Bathroom dual sensor mixer with
 soap dispenser control system 47-48
- Toilet sensor flush fittings control system 49-52

2—The solution of TOF laser sensor control system

- Kitchen sensor faucet control system 54
- Bathroom sensor mixer control system 55
- Smart toilet sensor 56

3—The solution of wireless sensor control system

- Kitchen sensor faucet control system 58



Sensor faucet adapter


SENSOR FAUCET ADAPTER

Power supply	DC 4.5V(3 pcs AAA alkaline batteries)
	3.7V rechargeable lithium battery
Sensor distance	Side: 6±1cm, Bottom:10±1cm
Working water pressure	0.05-0.7Mpa(7.25-101.52Psi)
Connector size	Female M22 / Male M24 / G1/2"
Battery continuous lifetime	6 months
Charging time	1.5-2 hours
Waterproof level	IPX5

Sensor faucet adapter




GBL-61901

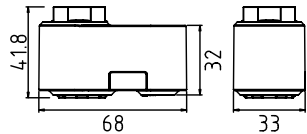

White Gray




GBL-6193



White Chromed




GBL-6195



Chromed Nickel
Matt black




GBL-6197



Chromed Nickel
Matt black



GBL-6197-C



Chromed Nickel
Matt black



Kitchen sensor faucet

KITCHEN SENSOR FAUCET SERIES

Power supply	DC 6V/100-240V 50-60Hz
Sensor distance	10cm±1cm
Working water pressure	0.05-0.7Mpa(7.25-101.52Psi)
Product material	SUS304 stainless steel & brass
Colors	Chrome, Nickel, Matt black
Connector size	G1/2" or G3/8"
Waterproof level	IPX6





















Kitchen sensor faucet



BASIN SENSOR FAUCET SERIES






Power supply
DC 6V / AC100-240V, 50-60Hz
Sensor distance
20cm±2cm
Working water pressure
0.05-0.7Mpa(7.25-101.52Psi)
Product material
Brass & Zinc alloy
Connector size
G1/2" or G3/8"
Waterproof level
IPX6



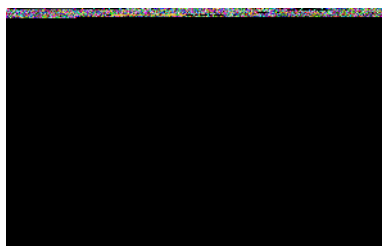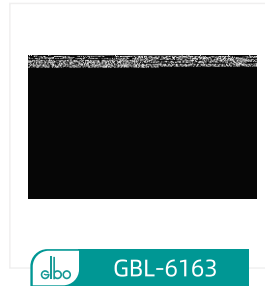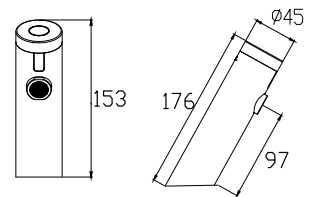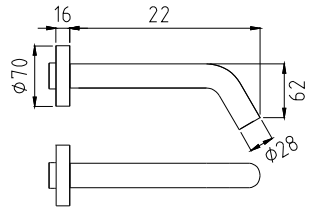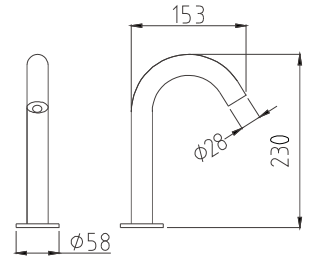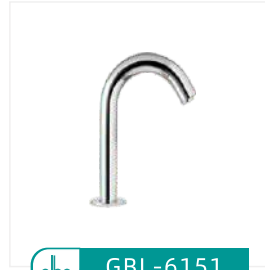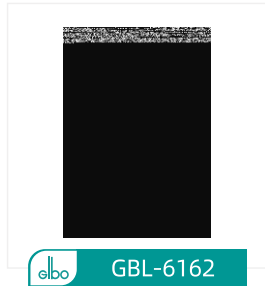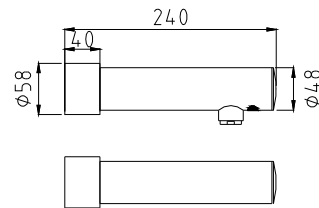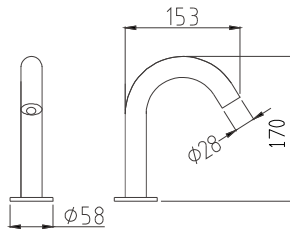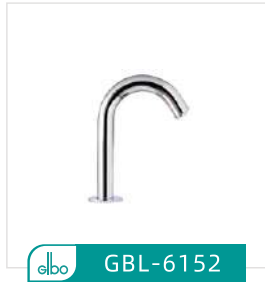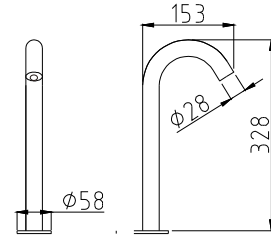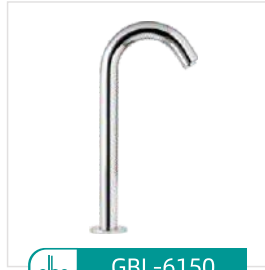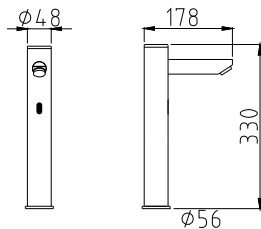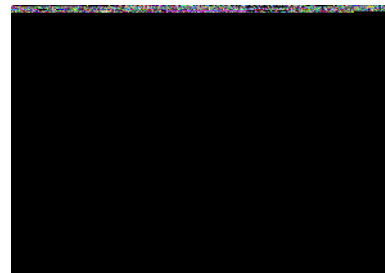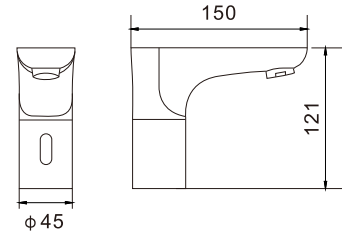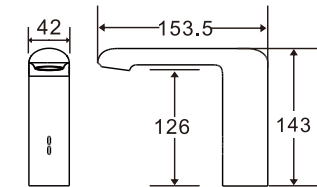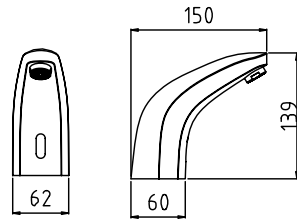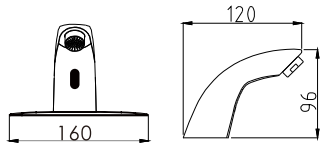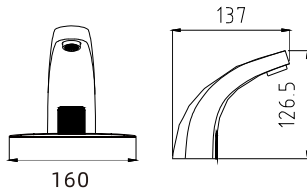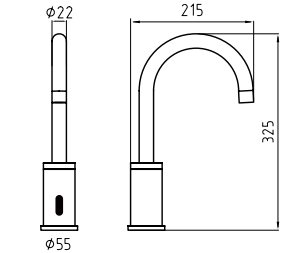

SENSOR
SOAP
DISPENSER
SERIES

Power supply	DC 6V(4 pcs AA alkaline batteries)
	3.7V rechargeable lithium battery
Sensor distance	7±1cm
Bottle volume	330ml / 280ml / 1000ml
Product material	ABS
Type of soap	Gel / Foaming / Liquid
Waterproof level	IPX4 / IPX6

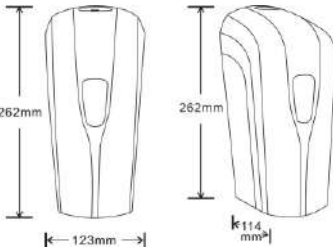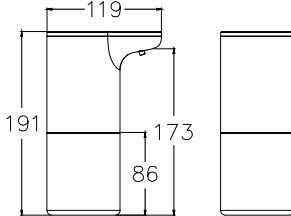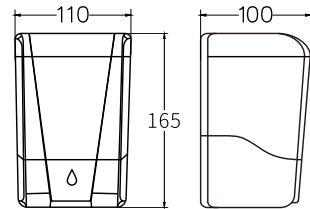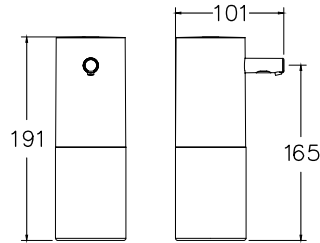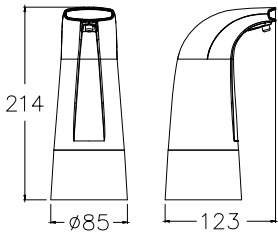

SENSOR SOAP FAUCET SERIES

Power supply

DC 6V / AC100-240V 50-60Hz

Sensor distance

15±1cm

Bottle volume

350ml / 1500ml

Product material








Brass

Type of soap

Gel / Foaming

Waterproof level

IPX6

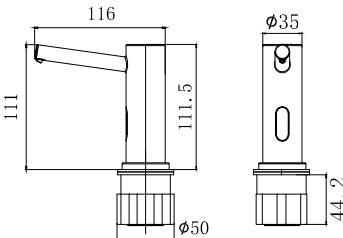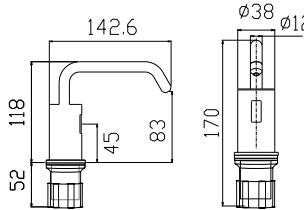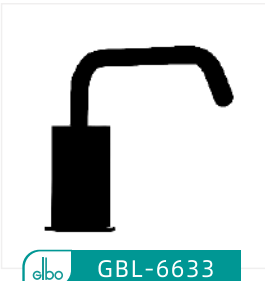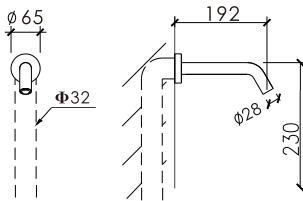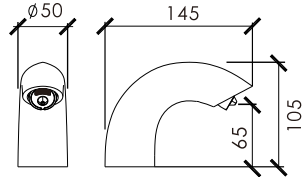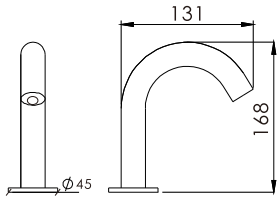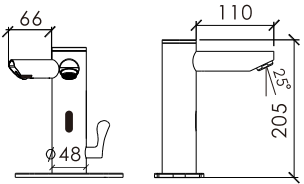


SENSOR URINAL FLUSHER SERIES

Power supply
DC 6V / AC100-240V, 50-60Hz
Sensing distance
67±5cm
Working water pressure
0.05-0.7Mpa(7.25-101.52Psi)
Product material
Brass & Stainless steel & Stalinite
Connector size
G1/2"
Waterproof level
IPX6


Sensor urinal flusher







Sensor urinal flusher






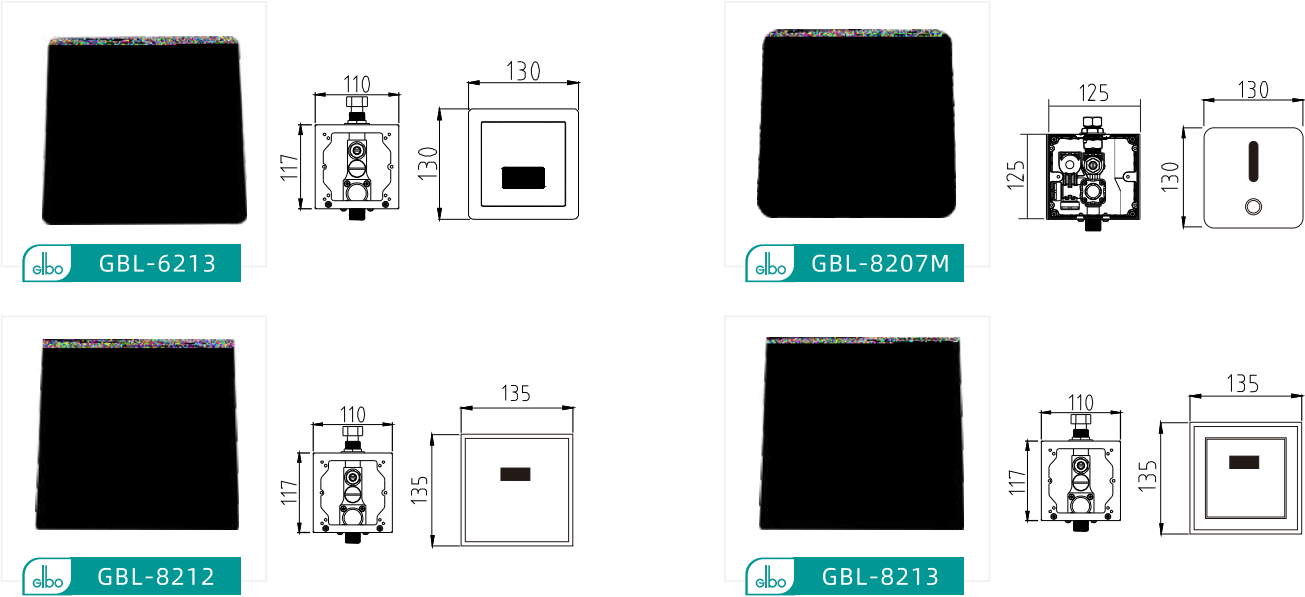


GBL-8200M Installation drawing

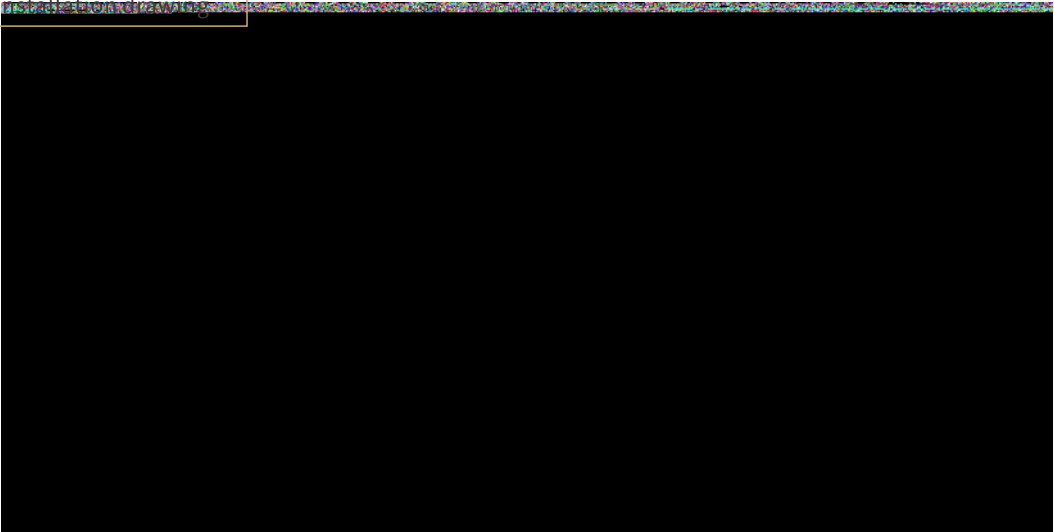




GBL-6202D Installation drawing

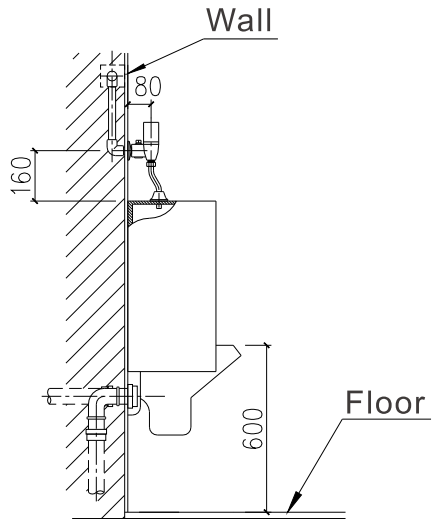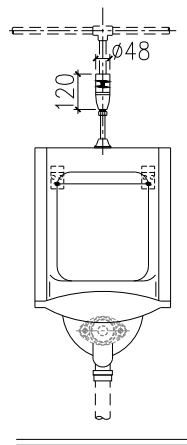

GBL-8200M Installation drawing

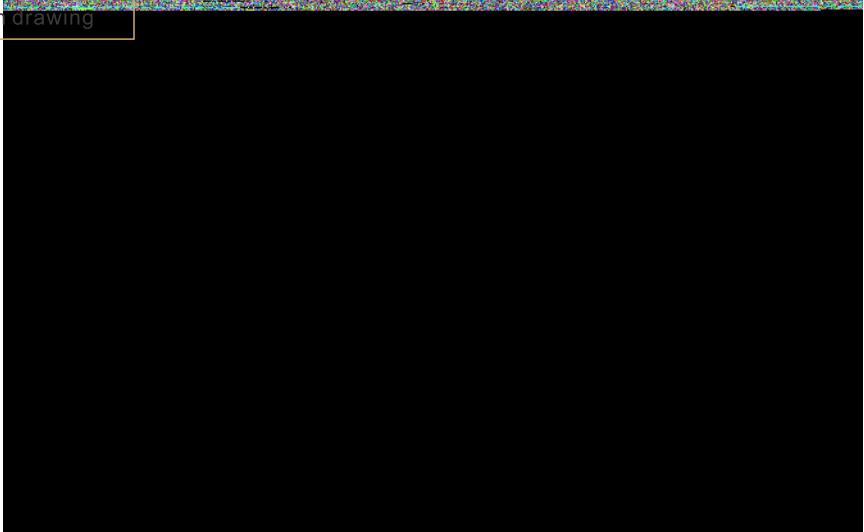



Integrated sensor urinal flusher


INTEGRATED SENSOR URINAL FLUSHER

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	67±5cm
Working water pressure	0.05-0.7Mpa(7.25-101.52Psi)
Product material	Brass / Stainless steel / ABS
Flushing time	2 seconds + 6 seconds
Connector size	G1/2"
Waterproof level	IPX6


Integrated sensor urinal flusher




GBL-6230




GBL-6231




GBL-6233




GBL-6235




GBL-6236



GBL-6237.1



GBL-6238




GBL-6238.1















SENSOR TOILET FLUSHER

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensor distance	80±5cm
Working water pressure	0.3-0.8Mpa(43.50-116.00Psi)
Product material	Brass / Stainless steel / ABS / Tempered glass
Flushing time	9 seconds
Connector size	G1"
Waterproof level	IPX6

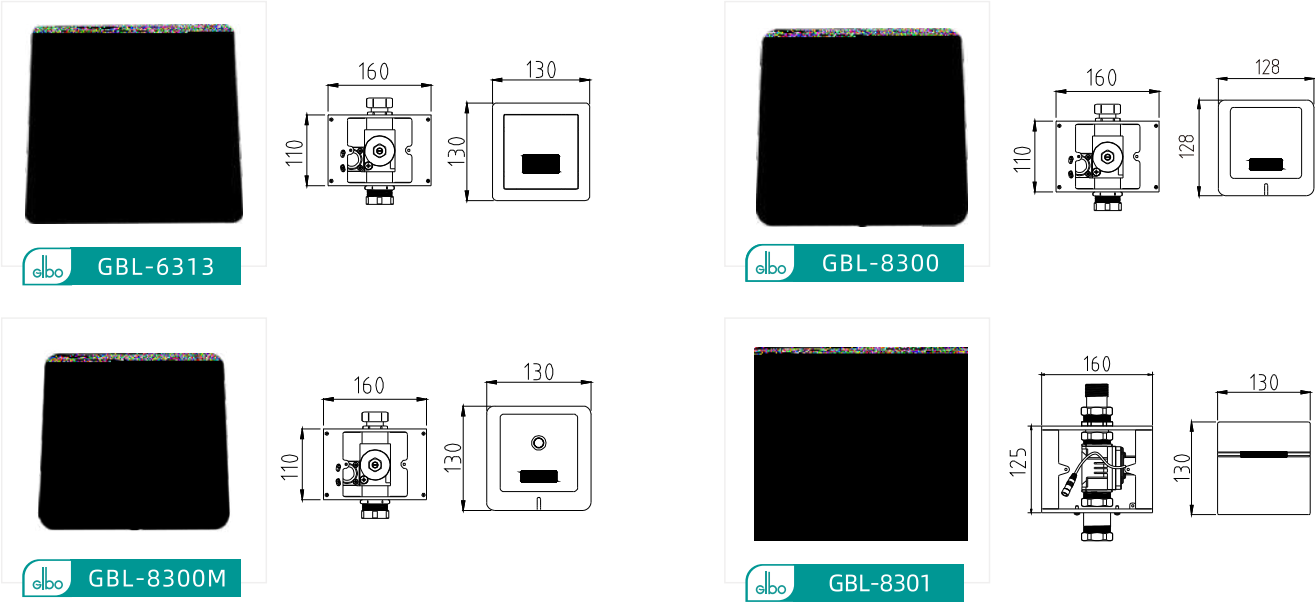


GBL-8300M Installation drawing

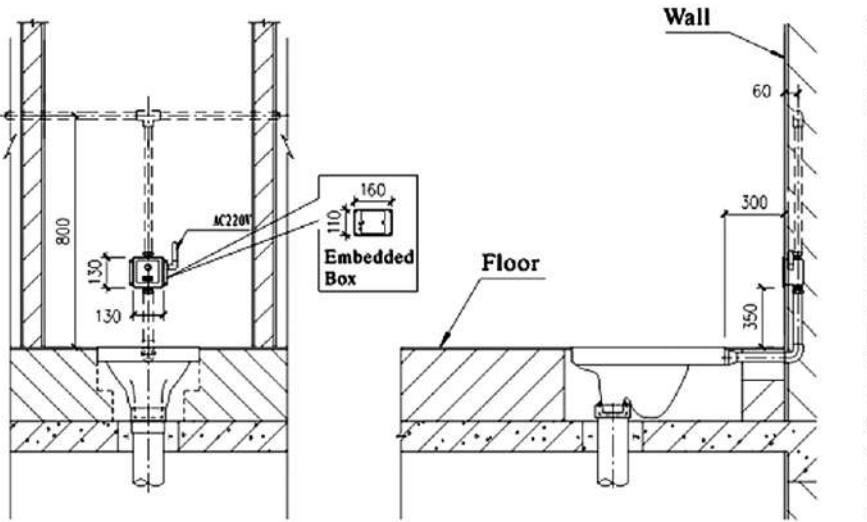



GBL-8300M Installation drawing

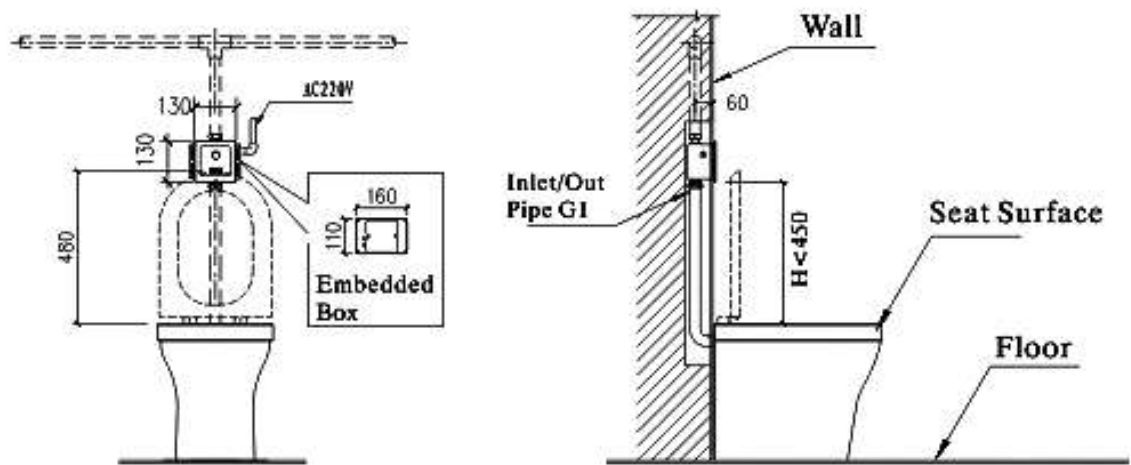

GBL-6303D2 Installation drawing















SENSOR CERAMIC URINAL

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	67±5cm
Working water pressure	0.05-0.7Mpa(7.25-101.52Psi)
Product material	Ceramic
Flushing time	2 seconds + 6 seconds
Connector size	G1/2"
Waterproof level	IPX6



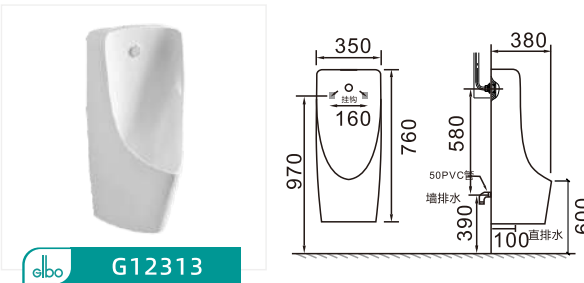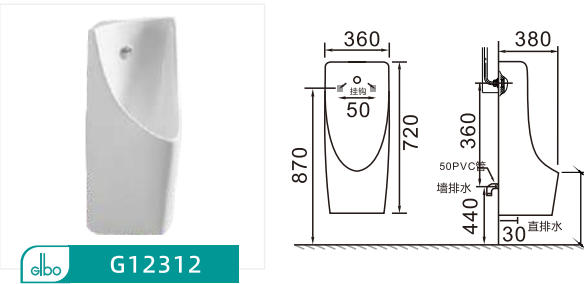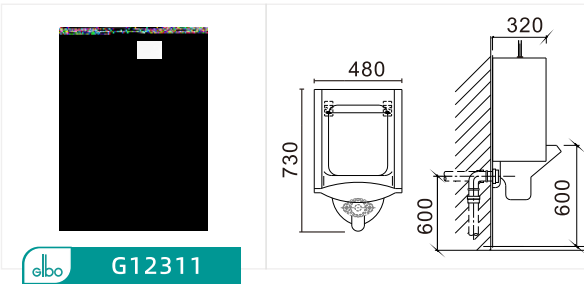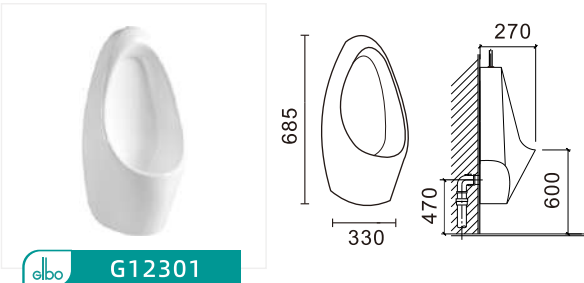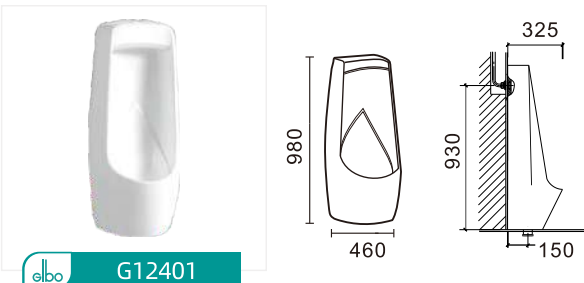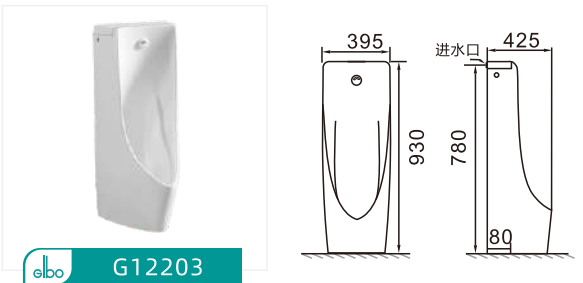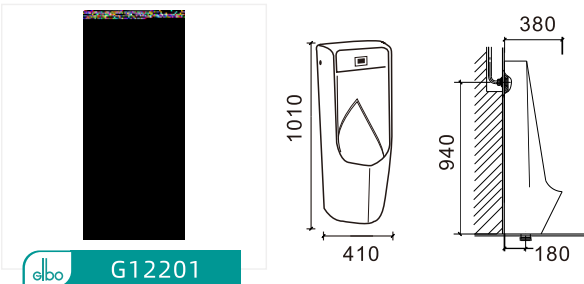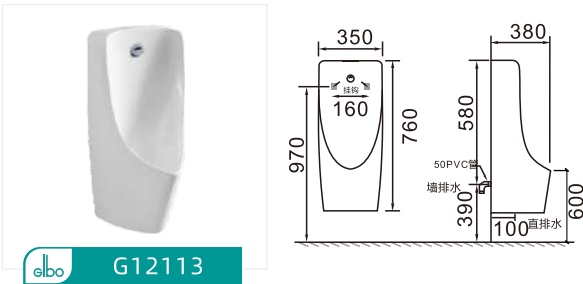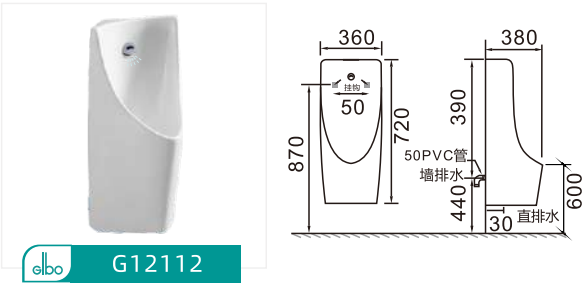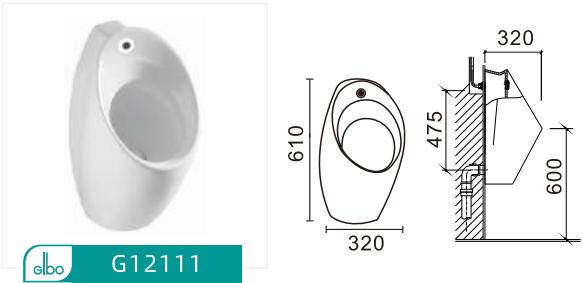

INTELLIGENT KITCHEN AND BATHROOM SOLUTIONS

- Infrared sensor solutions
- TOF laser sensor solutions
- Wireless sensor solutions

KITCHEN SENSOR FAUCET CONTROL SYSTEM

Motion sensor with control box

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	15±1cm
Inlet&Outlet size	G1/2"(DN15)
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 180 seconds.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will automatically close the valve when power is cut off.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ APPLICATION EXAMPLE



■ SPARE PARTS



KITCHEN SENSOR FAUCET CONTROL SYSTEM

Motion sensor with control box

■ APPLICATION EXAMPLE



■ SPARE PARTS



※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	15±1cm
Inlet&Outlet size	G1/2"(DN15)
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 180 seconds.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will automatically close the valve when power is cut off.
- The system with the waterproof wire connector, the waterproof grade is IPX6.
- The battery box was built in the control box.

BASIN SENSOR FAUCET CONTROL SYSTEM

Normal sensor with control box

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	40±3cm
Inlet&Outlet size	G1/2"(DN15)
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Working lifetime	More than 500,000 circles


※ FEATURES

- The system accept the DC 6V and AC 100-240, 50-60Hz power supply together.
- The sensing distance can be adjusted from 10-40cm by remote.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 60 seconds.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will automatically close the solenoid valve when power is cut off
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ APPLICATION EXAMPLE



■ SPARE PARTS

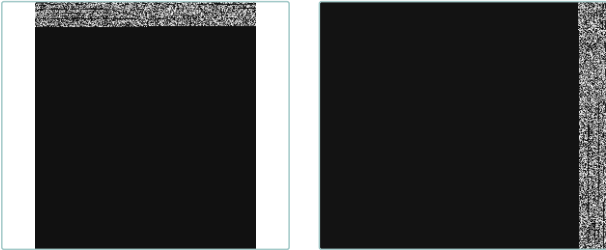

BASIN SENSOR FAUCET CONTROL SYSTEM

Spout sensor with control box

■ APPLICATION EXAMPLE



■ SPARE PARTS



※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	15±1cm
Inlet&Outlet size	G1/2"(DN15)
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V and AC 100-240, 50-60Hz power supply together.
- The sensing distance can be adjusted from 10-25cm by remote.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 60 seconds.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

BASIN SENSOR FAUCET CONTROL SYSTEM

All-in-one dual sensor control system

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	Front: 15±1cm, Top:10±1cm
Inlet&Outlet size	G1/2"(DN15)
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- There are two sensors with two models of turn on and turn off.
- The system is built in one part to make the integrated sensor faucet.
- The sensing distance can be adjusted by remote.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 60 seconds & 180 seconds.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will automatically close the solenoid valve when power is cut off.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ APPLICATION EXAMPLE




■ SPARE PARTS



BASIN SENSOR MIXER CONTROL SYSTEM

Normal sensor with solenoid valve

■ APPLICATION EXAMPLE

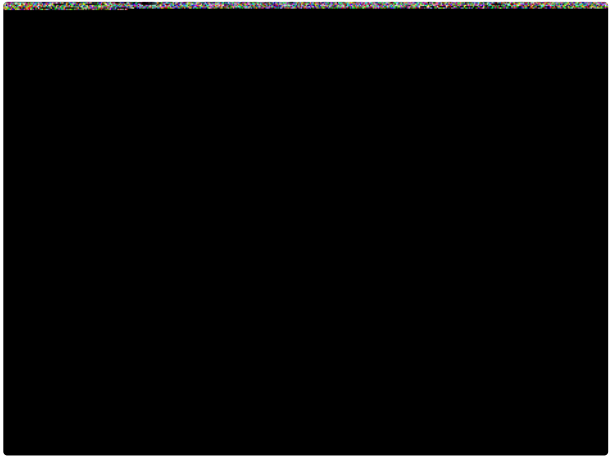

■ SPARE PARTS



※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	30±2cm
Inlet&Outlet size	M10 & N8
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 60 seconds
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

BASIN SENSOR MIXER CONTROL SYSTEM

Dual sensor with integrated solenoid valve

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	23±2cm motion sense: 5cm±1cm
Inlet&Outlet size	M10
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The system have two sensing ways with instant sensing and motion sensing.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 60 seconds & 180 seconds.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ APPLICATION EXAMPLE



■ SPARE PARTS



SENSOR SOAP FAUCET CONTROL SYSTEM

Spout sensor and control box

■ APPLICATION EXAMPLE



■ SPARE PARTS



※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	15±1cm
Capacity of bottle	1500ml
Soap types	Liquid or Foaming
Working temperature	0-55℃
Working lifetime	More than 200,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The unit working time of pump can be adjusted by remote.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

BATHROOM DUAL SENSOR MIXER CONTROL SYSTEM

Dual sensor with 3 colors LED light and solenoid valve

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤30uA
Sensing distance	Front: 23±2cm, Side:8±1cm
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime	More than 500,000 circles


※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The system have two sensing ways with instant sensing and motion sensing.
- The power consumption less than 30uA.
- The maximum opening time of the solenoid valve is 60 seconds & 180 seconds.
- The system with temperature sensor and the three colors LED light ring.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ APPLICATION EXAMPLE



■ SPARE PARTS

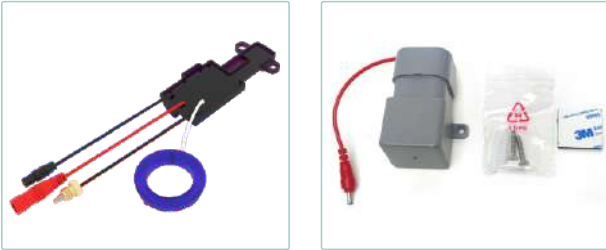

BATHROOM DUAL SENSOR MIXER CONTROL SYSTEM

Dual sensor with temperature display and solenoid valve

■ APPLICATION EXAMPLE



■ SPARE PARTS



※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	Front: 23±2cm, Side:8±1cm
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The system have two sensing ways with instant sensing and motion sensing.
- The maximum opening time of the solenoid valve is 60 seconds & 180 seconds.
- The system with temperature sensor and temperature display.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

BATHROOM SENSOR FAUCET WITH SOAP DISPENSER CONTROL SYSTEM

Dual sensor and integrated control box

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	Water: 23±2cm, Soap: 15±1cm
Capacity of bottle	500ml
Soap types	Foaming
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime of pump	More than 200,000 circles
Working lifetime of solenoid valve	More than 500,000 circles

■ APPLICATION EXAMPLE



※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The unit working time of pump can be adjusted by remote.
- The maximum opening time of the solenoid valve is 60 seconds
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ SPARE PARTS



BATHROOM DUAL SENSOR MIXER WITH SOAP DISPENSER CONTROL SYSTEM

Dual sensor with temperature display and integrated control box

■ APPLICATION EXAMPLE




※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	Water Front : 23±2cm, Side: 8±1cm Soap: 8±1cm
Capacity of bottle	500ml
Soap types	Foaming
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime of pump	More than 200,000 circles
Working lifetime of solenoid valve	More than 500,000 circles

※ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The unit working time of pump can be adjusted by remote.
- The maximum opening time of the solenoid valve is 60 seconds and 180 seconds.
- The system with temperature sensor and temperature display.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ SPARE PARTS

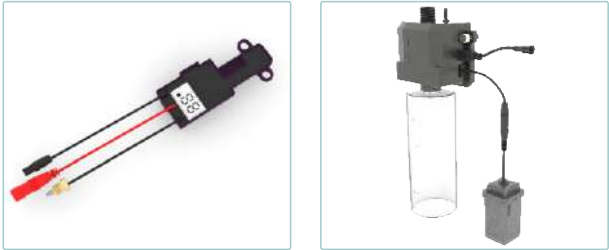

TOILET SENSOR FLUSH FITTINGS CONTROL SYSTEM

Sensor button and flush fittings

✂ TECHNICAL PARAMETERS

Power supply	DC 6V
Standby power	≤30uA
Sensing distance	10±2cm
Height	255mm
Working temperature	0-55℃
Water temperature	1℃-60℃
Working lifetime of pump	More than 200,000 circles


✂ FEATURES

- The system is powered by DC 6V.
- The sensing distance can be adjusted by remote.
- The size of button is optional with Ø38mm, Ø48mm and rectangle.
- The sensor button with the push flushing function too.
- The sensor with half flushing and full flushing.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will not working if the working voltage is less than 4.5V.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

▣ APPLICATION EXAMPLE



▣ SPARE PARTS

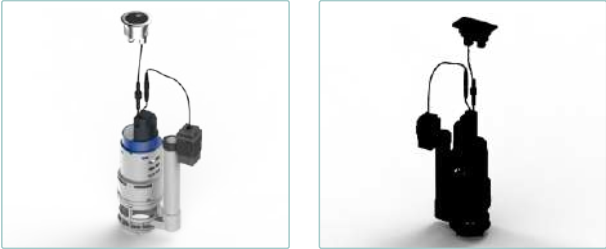


TOILET SENSOR FLUSH FITTINGS CONTROL SYSTEM

Sensor and flush fittings

▣ APPLICATION EXAMPLE



▣ SPARE PARTS

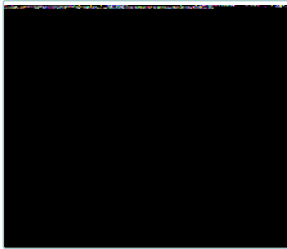

✂ TECHNICAL PARAMETERS

Power supply	DC 6V
Standby power	≤30uA
Sensing distance	80±5cm
Height	255mm
Working temperature	0-55℃
Water temperature	1℃-60℃
Working lifetime of pump	More than 200,000 circles

✂ FEATURES

- The system is powered by DC 6V.
- The sensing distance can be adjusted by remote.
- The sensor button with the push flushing function too.
- The sensor with half flushing and full flushing.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will not working if the working voltage is less than 4.5V.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

TOILET SENSOR FLUSH FITTINGS CONTROL SYSTEM

Sensor button and flush fittings

※ TECHNICAL PARAMETERS

Power supply	DC 6V
Standby power	≤30uA
Sensing distance	10±2cm
Height	255mm
Working temperature	0-55℃
Water temperature	1℃-60℃
Working lifetime of pump	More than 200,000 circles


※ FEATURES

- The system is powered by DC 6V.
- The sensing distance can be adjusted by remote.
- The size of button is Ø38mm.
- The sensor button with the push flushing function too.
- The sensor with half flushing and full flushing.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system will not working if the working voltage is less than 4.5V.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

■ APPLICATION EXAMPLE



■ SPARE PARTS

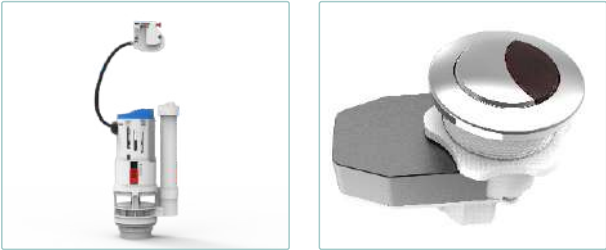

TOILET SENSOR CONCEALED CISTERN CONTROL SYSTEM

Sensor panel and concealed cistern

※ TECHNICAL PARAMETERS

Power supply	DC 6V / AC 100-240V 50/60Hz
Standby power	≤60uA
Sensing distance	80±5cm
Size of panel	250x165mm
Flushing mode	Half flushing when induction time <60 seconds. Full flushing when induction time ≥60 seconds

※ FEATURES

- The system is powered by DC 6V or AC100-240V 50/60Hz.
- The sensor panel with the push flushing function too.
- The sensor with half flushing and full flushing to saving water.
- The system suit for the pneumatic flush fittings.

■ SPARE PARTS



THE SOLUTION OF TOF LASER SENSOR


- Immune to color differences
- Resist the influence of specular reflection
- Accurate sensing distance
- Stronger anti-interference ability



KITCHEN SENSOR FAUCET CONTROL SYSTEM

TOF laser sensor with control box

APPLICATION EXAMPLE

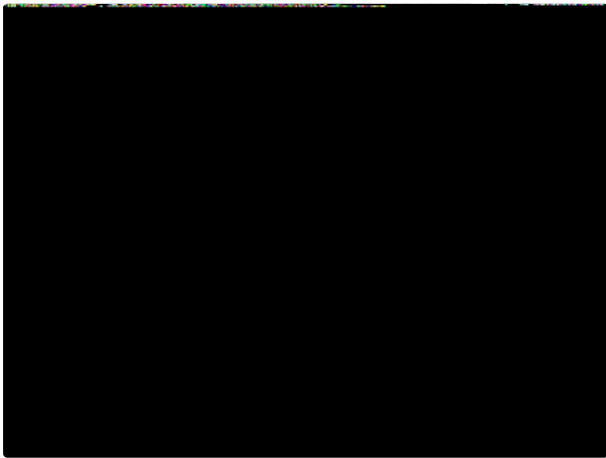

SPARE PARTS



TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Standby power	≤45uA
Sensing distance	8±2cm
Inlet&Outlet size	G1/2"(DN15)
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55°C
Water temperature	1°C-75°C
Working lifetime	More than 500,000 circles

FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The tolerance of sensing distance is less than 5% for different materials background.
- The power consumption less than 45uA.
- The maximum opening time of the solenoid valve is 180 seconds.
- The system will automatically close the valve when power is cut off.
- The system with the waterproof wire connector, the waterproof grade is IPX6.
- The battery box was built in the control box.

BATHROOM SENSOR MIXER CONTROL SYSTEM

TOF laser sensor with temp. display and integrated control box

❖ TECHNICAL PARAMETERS

Power supply	DC 6V / AC100-240V, 50-60Hz
Sensing distance	13±2cm for water, 7±1cm for soap
Capacity of bottle	500ml
Soap types	Foaming
Working pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Working lifetime of pump	More than 200,000 circles
Working lifetime of solenoid valve	More than 500,000 circles


❖ FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The unit working time of pump can be adjusted by remote.
- The tolerance of sensing distance is less than 5% for different materials background.
- The system with temperature sensor and temperature display.
- The system with week power reminder when the working voltage is less than 4.7V.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

❖ APPLICATION EXAMPLE



❖ SPARE PARTS

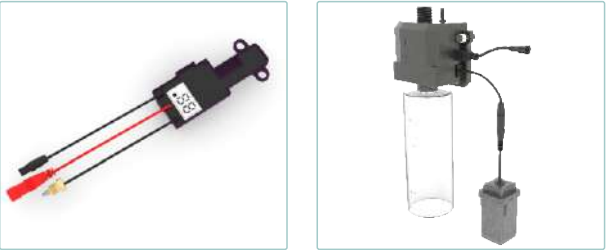


SMART TOILET SENSOR CONTROL SYSTEM

TOF laser sensor for smart toilet

❖ APPLICATION EXAMPLE



❖ SPARE PARTS

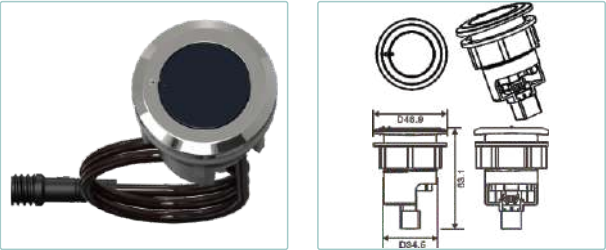

❖ TECHNICAL PARAMETERS

Working voltage	DC 3.5-12V
Standby power	≤60uA
Sensing distance	18±3cm
Working temperature	-10-60℃
Working lifetime	More than 500,000 circles

❖ FEATURES

- The sensing distance can be adjusted by remote.
- The tolerance of sensing distance is less than 5% for different materials background.
- The system with the waterproof wire connector, the waterproof grade is IPX6.

THE SOLUTION OF WIRELESS SENSOR



WIRELESS SENSOR FAUCET CONTROL SYSTEM

Wireless sensor box and control box

APPLICATION EXAMPLE



SPARE PARTS



TECHNICAL PARAMETERS

Power supply	DC 3.0V for sensor box, DC 6V/AC 100-240V for control box
Standby power	sensor box≤30uA, control box≤40uA
Sensing distance	15±2cm
Working water pressure	0.05-0.7Mpa(7.25-101.52PSI)
Working temperature	0-55℃
Water temperature	1℃-75℃
Communication method	2.4G
Max. control distance	8.0 meters
Working lifetime	Sensor box≥300,000 circles, Control box≥500,000 circles

FEATURES

- The system accept the DC 6V or AC 100-240, 50-60Hz power supply.
- The sensing distance can be adjusted by remote.
- The unit working time of pump can be adjusted by remote.
- The tolerance of sensing distance is less than 5% for different materials background.
- The sensor box with the green LED light.
- The system with automatic turn off protection when power failure.
- The system with the waterproof wire connector, the waterproof grade is IPX6.