

GIBO



FOCUS ON  
SMART KITCHEN & BATHROOM

FUJIAN GIBO KITCHEN AND BATH TECH CO.,LTD

2023

福建洁博利厨卫科技有限公司  
FUJIAN GIBO KITCHEN AND BATH TECH CO.,LTD.

Address 1: Building 54, Area B, Pushang industrial park, Cangshan district,  
Fuzhou city, Fujian province, 350008, China.

Address 2: Building 3, Liangyuan science park, Hi-tech district, Fuzhou city,  
Fujian province, 350109, China

Email: sales1@gibol.com.cn

Website: www.gibo.com.cn

■ 20<sup>+</sup>

More than 20 years of experience in the sensor sanitary ware industry

■ 180<sup>+</sup>


More than 180 technology and product patents

Gibo is a leading intelligent kitchen and bathroom expert in China, focusing on the research and development, production, and sales of intelligent kitchen and bathroom products as a national high-tech enterprise.


The company has over 100 employees and a technical team of over 15, with the cumulative ownership of 185 patents. There are 2 technology companies and 2 factories, with an area of over 5000 and 7 production lines. The monthly production capacity of sensors exceeds

60000, and the monthly production capacity of finished products exceeds 30000 sets. The product has passed various international certifications, including CE, ROHS, FCC, CUPC, NSF, etc. Providing OEM&ODM services to over 50 famous bathroom brands. We can provide customers with a comprehensive one-stop service from intelligent solution design, product development, testing, production, and export. Looking forward to working with you!


## PATENTS

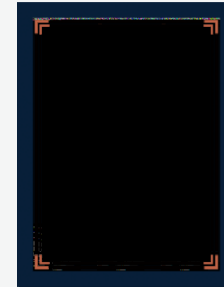

Patent number  
ZL 2011 1 0090047.8

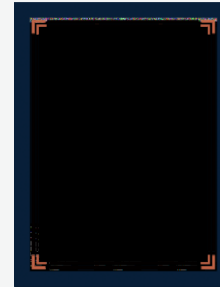

Patent number  
ZL 2015 1 0621320.3

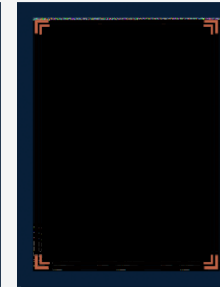

Patent number  
ZL 2012 1 0018517.4



Patent number  
ZL 2012 1 0576859.8



Patent number  
ZL 2020 2 0415304.5




Patent number  
ZL 2019 2 2113033.8


## FACTORY CERTIFICATIONS



BSCI



ISO 14001



ISO 45001




ISO 9001

## PRODUCTS CERTIFICATIONS



CE



ROHS




CE



NSF



CUPC



FCC

# Sensor production process

Taking quality and safety as the fundamental principle,  
striving for excellence and creating professional intelligent kitchen and bathroom products

## 100% INSPECTION FOR ALL ELECTRIC PARTS

### Battery boxes

Install the batteries to testing

### Solenoid valves

Test the resistance, water leak,  
air leak and artificial load

### Wires

Test the insulation resistance

### Power adapters

Test the function, performance,  
artificial load, and final product

### Sensors

Test the function, performance,  
mode, seal and artificial load



# Finished product production process

Centered on user experience,  
continuously innovating to meet the new needs of kitchen and bathroom technology



# CONTENTS

01

ABOUT US

|                                       |       |
|---------------------------------------|-------|
| • Company Introduction                | 01    |
| • Qualification                       | 02    |
| • Sensor production process           | 03-04 |
| • Finished product production process | 05-06 |
| • Contents                            | 07-08 |

02

SENSORS SERIES

|                                                          |       |
|----------------------------------------------------------|-------|
| • DC 3.7V Infrared sensors for automatic tap adapters    | 10    |
| • DC 4.5V Infrared Sensors for automatic tap adapters    | 11    |
| • DC 6V Infrared Sensors for automatic faucets           | 12-13 |
| • Infrared Sensors for touchless pull out ktichen faucet | 14    |
| • Infrared Sensors for automatic soap dispenser          | 15-16 |
| • Infrared Sensors for automatic urinal flusher          | 17-18 |
| • Infrared Sensors for automatic toilet flusher          | 19    |
| • TOF Sensor for automatic faucet                        | 20    |
| • TOF Sensor for smart toilet                            | 21    |

03

SOLENOID VALVE&CONTROL BOX SERIES

|                                            |    |
|--------------------------------------------|----|
| • Solenoid Valve for sensor faucet         | 23 |
| • Solenoid Valve for urinal flusher        | 24 |
| • Solenoid Valve for toilet flusher        | 25 |
| • Control box for automatic faucet         | 26 |
| • Control box for automatic urinal flusher | 27 |
| • Control box for automatic toilet flusher | 28 |
| • Control box for automatic soap dispenser | 29 |

04

BATTERY BOX & POWER ADAPTER SERIES

|                    |       |
|--------------------|-------|
| • 4.5V Battery box | 31    |
| • 6.0V Battery box | 32    |
| • Power adapter    | 33-34 |

05

OTHER ACCESSORIES

|                                                    |    |
|----------------------------------------------------|----|
| • Other accessories & Temperature regulating valve |    |
| • & Thermostatic valve & Flow regulating valve     | 35 |
| • Urinal Sprayer                                   | 36 |

DC 3.7V INFRARED SENSORS FOR AUTOMATIC  
TAP ADAPTERS

Technical Parameters

|                          |                    |
|--------------------------|--------------------|
| Power supply             | DC 3.7V            |
| Static Power Consumption | <30uA              |
| Sensor range             | 1-6cm & 1-13cm±2cm |




SENSORS SERIES

Good stability

Strong anti-interference ability

Low power consumption





High waterproof performance

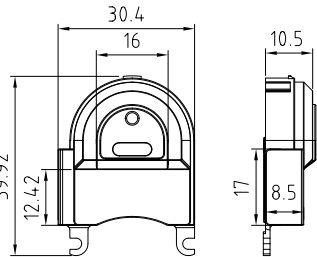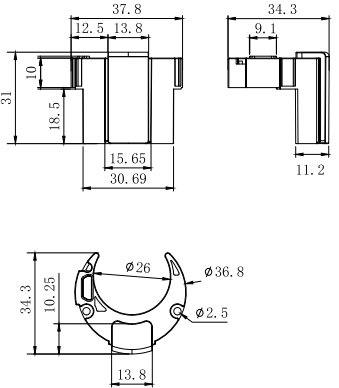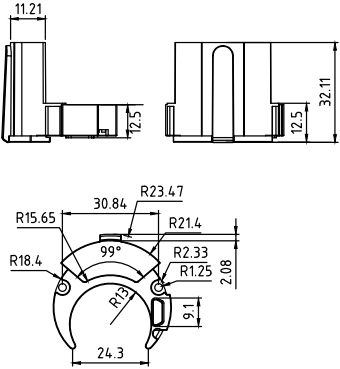

# DC 4.5V INFRARED SENSORS FOR AUTOMATIC TAP ADAPTERS

## Technical Parameters





|                          |                    |
|--------------------------|--------------------|
| Power supply             | DC 4.5V            |
| Static Power Consumption | <30uA              |
| Sensor range             | 1-6cm & 1-13cm±2cm |

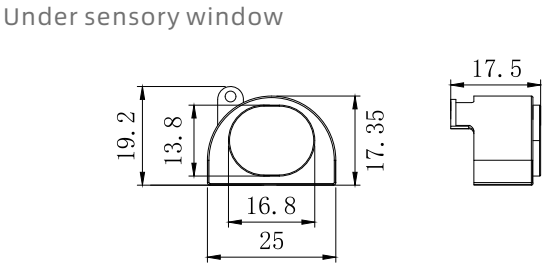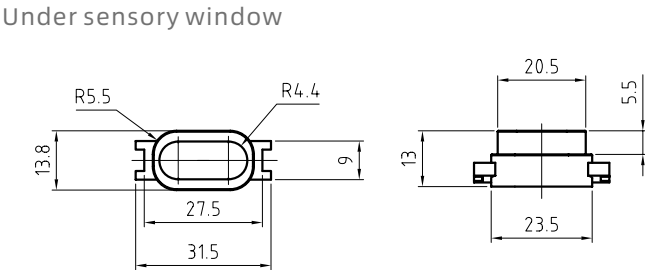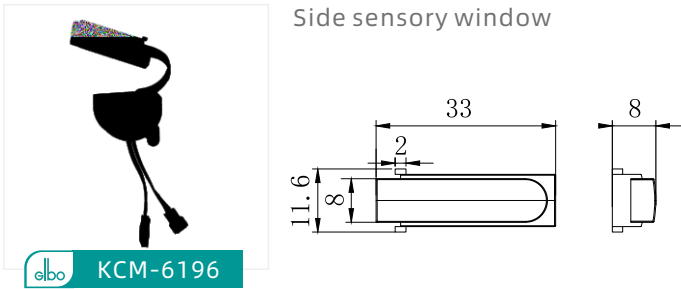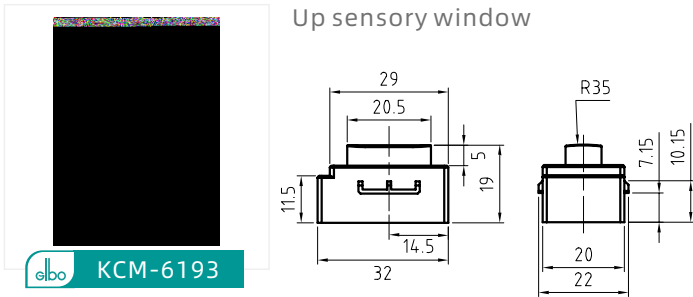


# DC 6V INFRARED SENSORS FOR AUTOMATIC FAUCETS

## Technical Parameters



|                          |                               |
|--------------------------|-------------------------------|
| Power supply             | DC 6V                         |
| Static Power Consumption | <30uA                         |
| Sensor range             | 10-30cm(Adjustable by remote) |

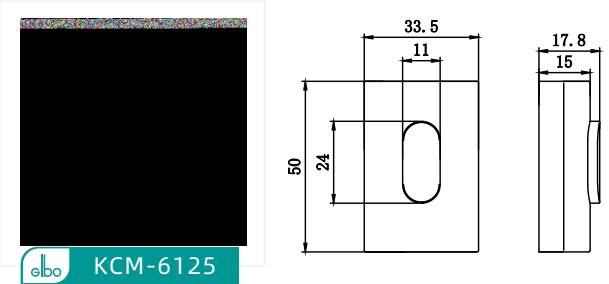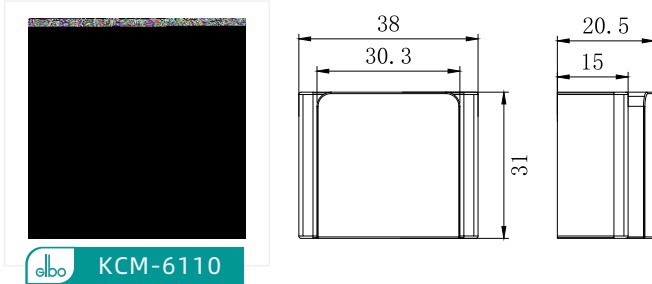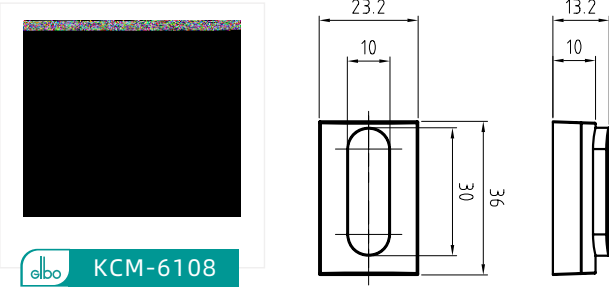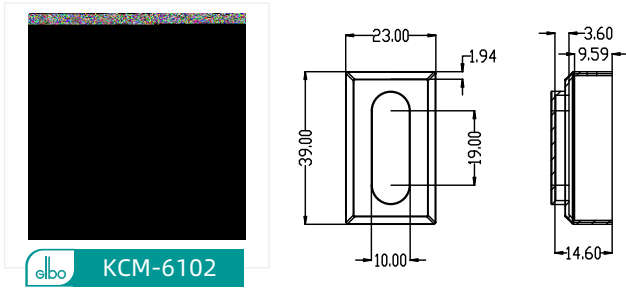





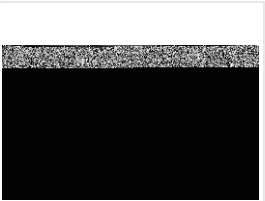



KCM-6126

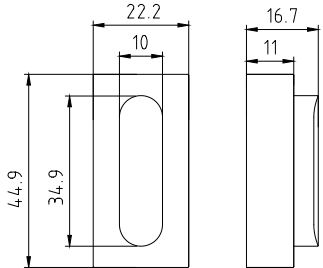


KCM-6150-1

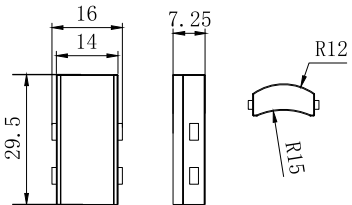



KCM-6155





KCM-6150-E

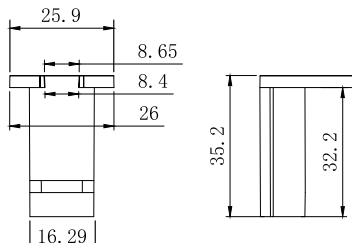



KCM-6170




KCM-6172

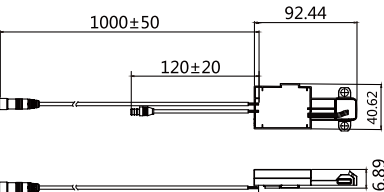

KCM-6172-L

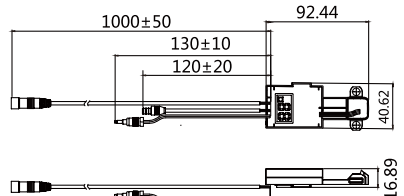

KCM-6172-R

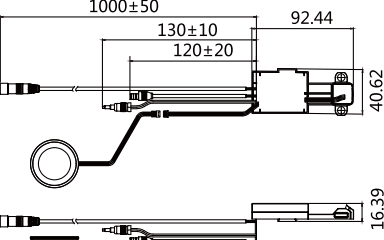



# INFRARED SENSORS FOR TOUCHLESS PULL OUT KTICHEN FAUCET

## Technical Parameters


|                          |            |
|--------------------------|------------|
| Power supply             | DC 6V      |
| Static Power Consumption | <30uA      |
| Sensor range             | 1-10cm±1cm |




KCM-9105-3

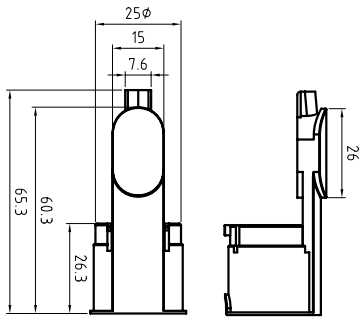

KCM-9160-XJ

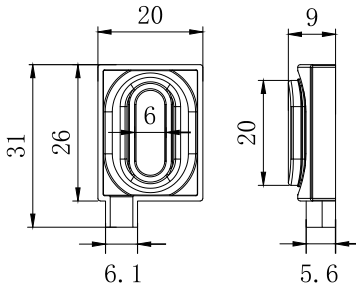

KCM-91605












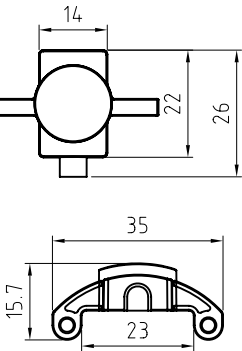




# INFRARED SENSORS FOR AUTOMATIC SOAP DISPENSER

## Technical Parameters








|                          |                       |
|--------------------------|-----------------------|
| Power supply             | DC 6V(3.7V for 33606) |
| Static Power Consumption | <30uA                 |
| Sensor range             | 1-7±1cm & 1-20±1cm    |

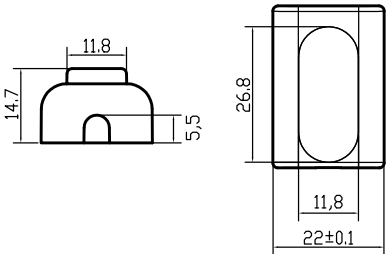

# INFRARED SENSORS FOR AUTOMATIC URINAL FLUSHER

## Technical Parameters


|                          |                       |
|--------------------------|-----------------------|
| Power supply             | DC 6V                 |
| Static Power Consumption | <30uA                 |
| Sensor range             | 1-67cm±5cm            |
| Flushing time            | 2 seconds + 6 seconds |

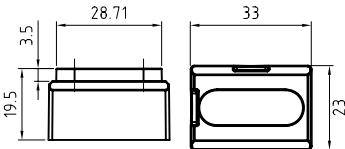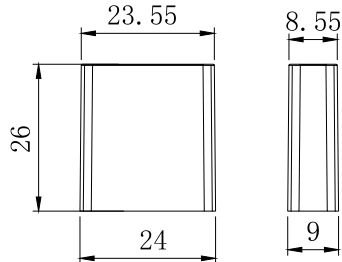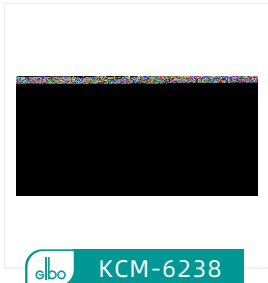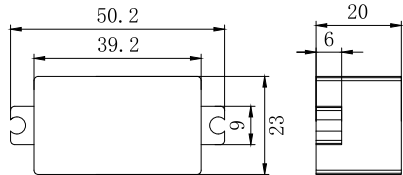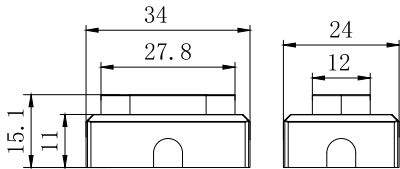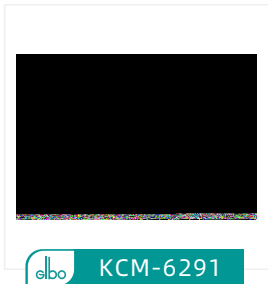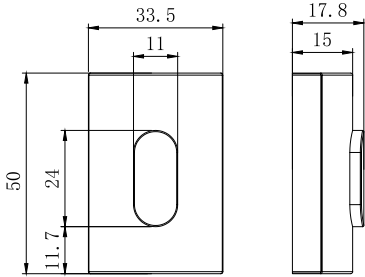

# INFRARED SENSORS FOR AUTOMATIC TOILET FLUSHER

## Technical Parameters


|                          |             |
|--------------------------|-------------|
| Power supply             | DC 6V       |
| Static Power Consumption | <30uA       |
| Sensor range             | 1-80cm±5cm  |
| Flushing time            | 6-9 seconds |

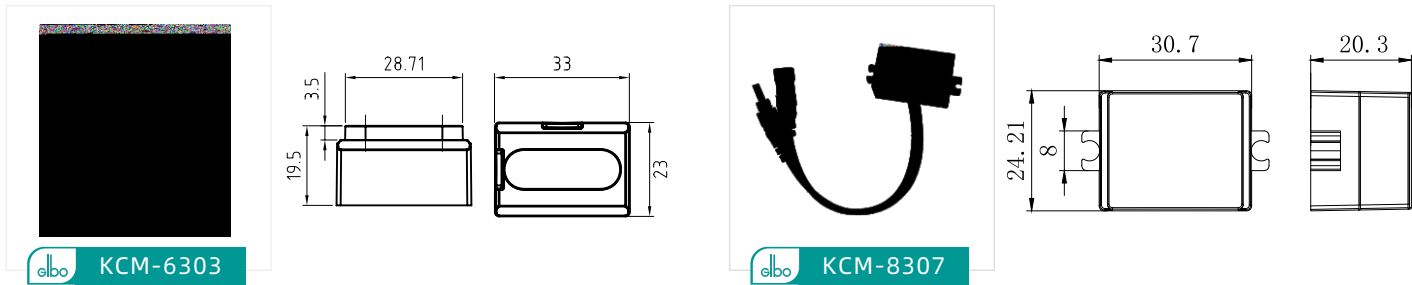

# TOF SENSOR FOR AUTOMATIC FAUCET

## Technical Parameters


|                          |              |
|--------------------------|--------------|
| Power supply             | DC 6V        |
| Static Power Consumption | <45uA        |
| Sensor range             | 1-10cm±0.5cm |

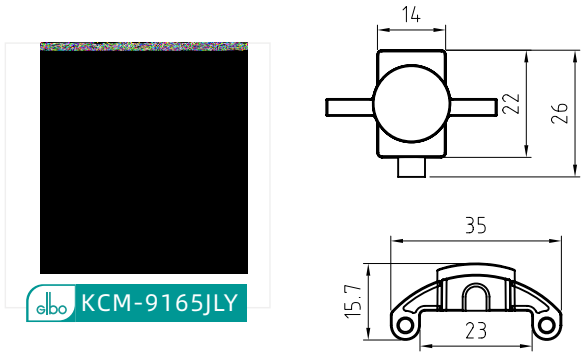

# TOF SENSOR FOR SMART TOILET

## Technical Parameters

|                          |              |
|--------------------------|--------------|
| Power supply             | DC 5-12V     |
| Static Power Consumption | <45uA        |
| Sensor range             | 1-18cm±0.5cm |

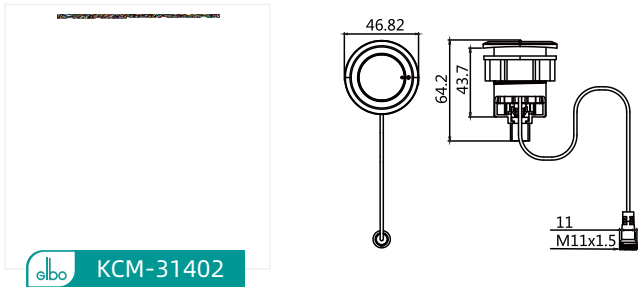

# SOLENOID VALVE&CONTROL BOX SERIES


- Long service life
- Low water hammer
- Low power consumption
- High waterproof performance

SOLENOID VALVE FOR SENSOR FAUCET

Technical Parameters

|               |                     |
|---------------|---------------------|
| Rated Voltage | DC 6V               |
| Switch mode   | DC Pulse            |
| Min Current   | 250mA               |
| Impulse width | 15-30ms             |
| Resistance    | 16-26Ω±0.5Ω ( 20℃ ) |

|                          |                          |
|--------------------------|--------------------------|
| Working pressure         | 0.05-0.8Mpa(7.25-116psi) |
| Medium temperature       | 1℃-75℃                   |
| Reacting time            | Open<0.15s, Close<0.5s   |
| Inlet & Outlet connector | G1/2"                    |
| Service life             | >500,000 cycles          |

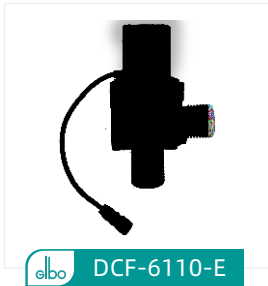

SOLENOID VALVE FOR URINAL FLUSHER

Technical Parameters

|               |                     |
|---------------|---------------------|
| Rated Voltage | DC 6V               |
| Switch mode   | DC Pulse            |
| Min Current   | 250mA               |
| Impulse width | 15-30ms             |
| Resistance    | 16-26Ω±0.5Ω ( 20℃ ) |

|                          |                          |
|--------------------------|--------------------------|
| Working pressure         | 0.05-0.8Mpa(7.25-116psi) |
| Medium temperature       | 1℃-75℃                   |
| Reacting time            | Open<0.15s, Close<0.5s   |
| Inlet & Outlet connector | G1/2"                    |
| Service life             | >500,000 cycles          |



# SOLENOID VALVE FOR TOILET FLUSHER

## Technical Parameters



|               |                      |                          |                          |
|---------------|----------------------|--------------------------|--------------------------|
| Rated Voltage | DC 6V                | Working pressure         | 0.05-0.8Mpa(7.25-116psi) |
| Switch mode   | DC Pulse             | Medium temperature       | 1°C-75°C                 |
| Min Current   | 250mA                | Reacting time            | Open<0.15s, Close<0.5s   |
| Impulse width | 15-30ms              | Inlet & Outlet connector | G1"                      |
| Resistance    | 16-26Ω±0.5Ω ( 20°C ) | Service life             | >500,000 cycles          |



# CONTROL BOX FOR AUTOMATIC FAUCET

## Technical Parameters





|                    |                 |                          |                          |
|--------------------|-----------------|--------------------------|--------------------------|
| Rated Voltage      | DC 6V           | Working pressure         | 0.05-0.8Mpa(7.25-116psi) |
| Medium temperature | 1°C-75°C        | Inlet & Outlet connector | G1/2"                    |
| Service life       | >500,000 cycles |                          |                          |



# CONTROL BOX FOR AUTOMATIC URINAL FLUSHER

## Technical Parameters


|                          |                          |
|--------------------------|--------------------------|
| Rated Voltage            | DC 6V                    |
| Working pressure         | 0.05-0.8Mpa(7.25-116psi) |
| Medium temperature       | 1°C-75°C                 |
| Inlet & Outlet connector | G1/2"                    |
| Service life             | >500,000 cycles          |



# CONTROL BOX FOR AUTOMATIC TOILET FLUSHER

## Technical Parameters

|                          |                          |
|--------------------------|--------------------------|
| Rated Voltage            | DC 6V                    |
| Working pressure         | 0.05-0.8Mpa(7.25-116psi) |
| Medium temperature       | 1°C-75°C                 |
| Inlet & Outlet connector | G1/2"                    |
| Service life             | >500,000 cycles          |






# CONTROL BOX FOR AUTOMATIC SOAP DISPENSER

## Technical Parameters

|                     |                 |
|---------------------|-----------------|
| Rated Voltage       | DC 6V           |
| Working temperature | 1°C-50°C        |
| Soap type           | Liquid or Foam  |
| Service life        | >200,000 cycles |



# BATTERY BOX & POWER ADAPTER SERIES

# 4.5V BATTERY BOX

## Technical Parameters


|               |                              |
|---------------|------------------------------|
| Rated Voltage | DC 4.5V                      |
| Battery       | 3 pcs AAA Alkaline batteries |



# 6.0V BATTERY BOX

## Technical Parameters


|               |                             |
|---------------|-----------------------------|
| Rated Voltage | DC 6V                       |
| Battery       | 4 pcs AA Alkaline batteries |



# POWER ADAPTER


## Technical Parameters

|              |              |
|--------------|--------------|
| Input        | AC 220V 50Hz |
| Output       | DC 6V        |
| Max. Current | 300mA        |



## Technical Parameters

|              |                    |
|--------------|--------------------|
| Input        | AC100-220V~50/60Hz |
| Output       | DC 6V              |
| Max. Current | 1A                 |




# OTHER ACCESSORIES

## OTHER ACCESSORIES



## TEMPERATURE REGULATING VALVE



## URINAL SPRAYER



## THERMOSTATIC VALVE



## FLOW REGULATING VALVE

