
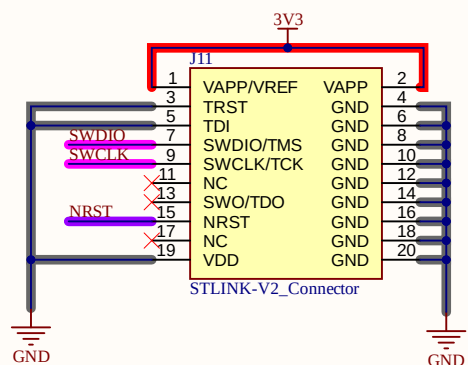
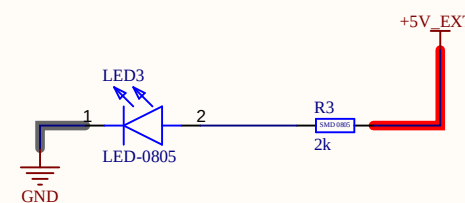
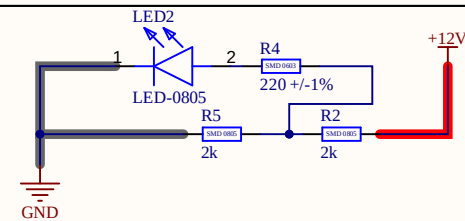
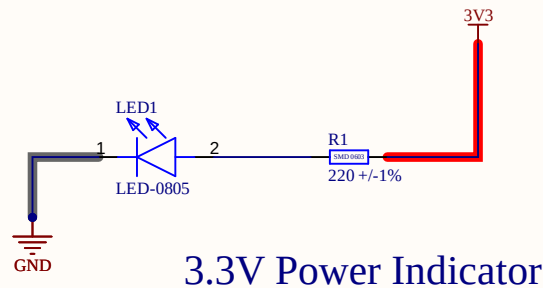
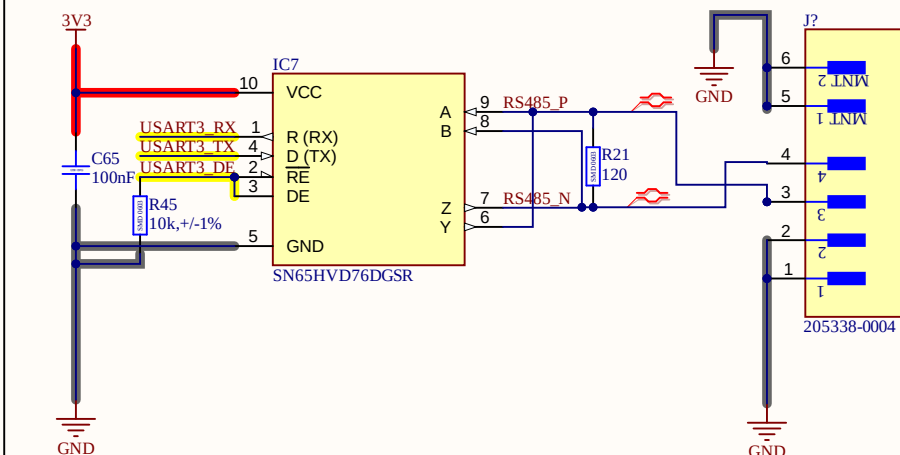
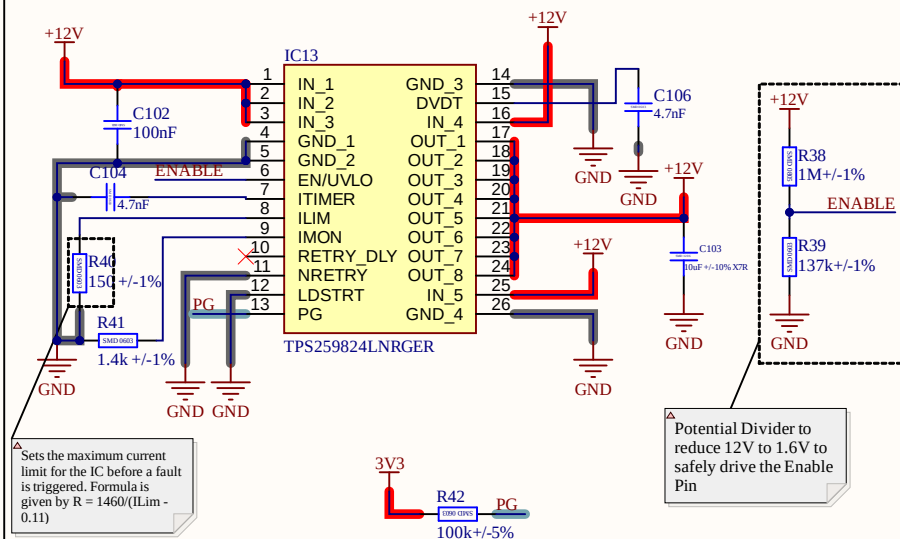
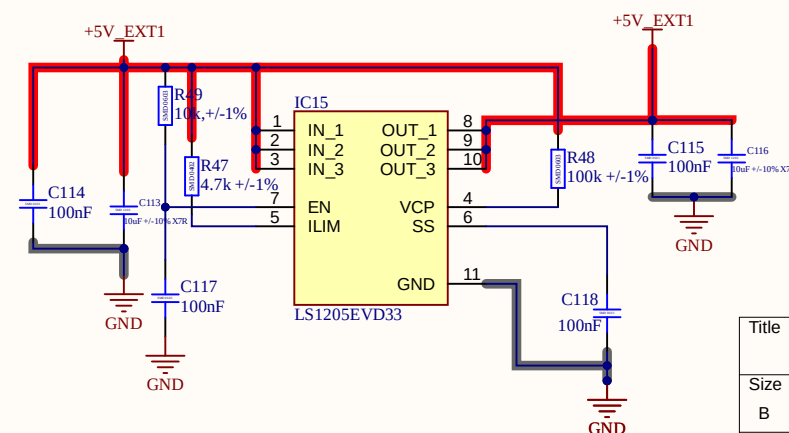
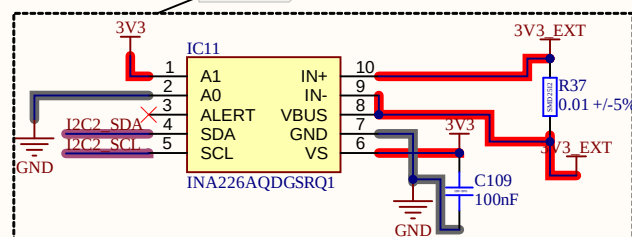
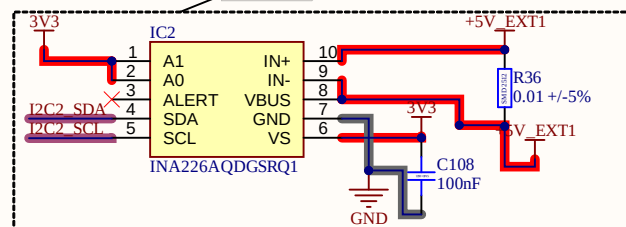


INA226 Address		
A1	A0	SLAVE ADDRESS
GND	GND	1000000
GND	VS	1000001
GND	SDA	1000010
GND	SCL	1000011
VS	GND	1000100
VS	VS	1000101

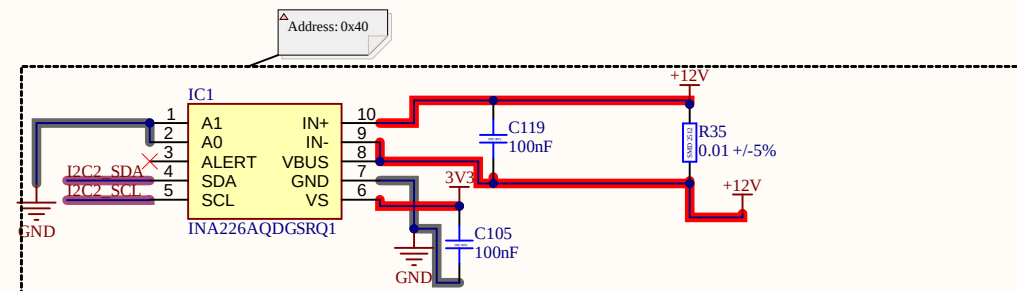

Title		
Size B	Number	Revision
Date:	2-04-2026	Sheet of
File:	C:\Users\...\Power_Indicator.SchDoc	Drawn By:






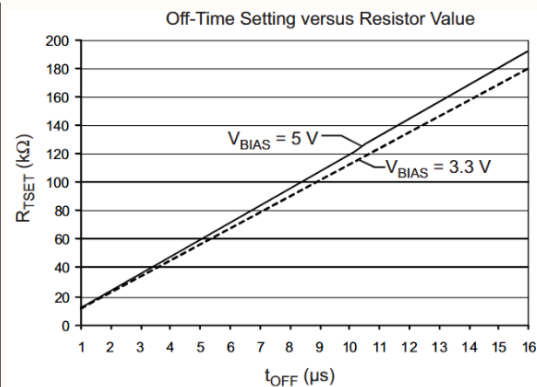


TABLE 1 - MODE1 CONFIGURATION SETTINGS

OPERATION	CONNECTION	f _{SWITCH} (kHz)	R _{MODE1} (kΩ)
Skip	to A _{GND}	300	51
		500	100
		750	200
		1000	499
Forced CCM	to V _{DD}	300	51
		500	100
		750	200
		1000	499

TABLE 2 - MODE2 CONFIGURATION SETTINGS

SOFT-START TIME	CONNECTION	I _{LIMIT} (%)	R _{MODE2} (kΩ)
3 ms	to A _{GND}	30	51
		54	100
		78	200
		100 % (18 A on SiC437) 100 % (12 A on SiC438)	499
6 ms	to V _{DD}	30	51
		54	100
		78	200
		100 % (18 A on SiC437) 100 % (12 A on SiC438)	499

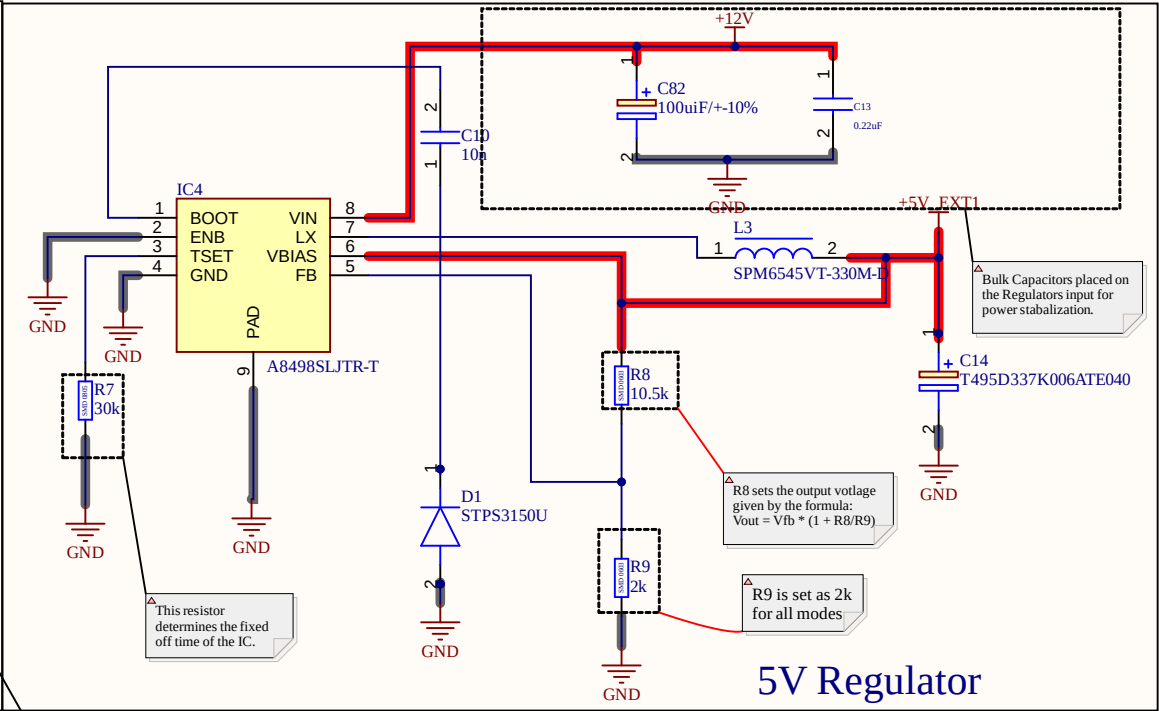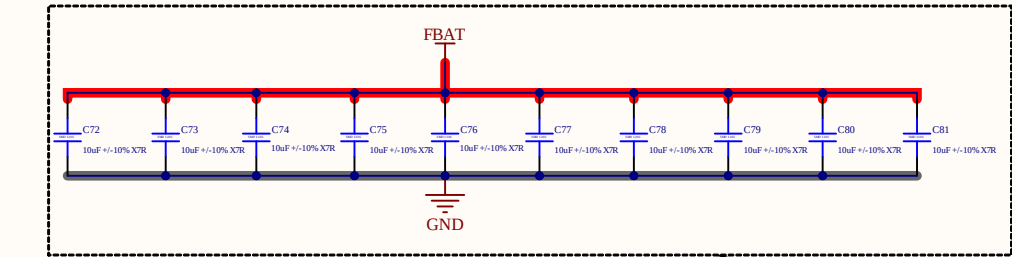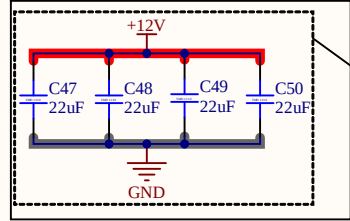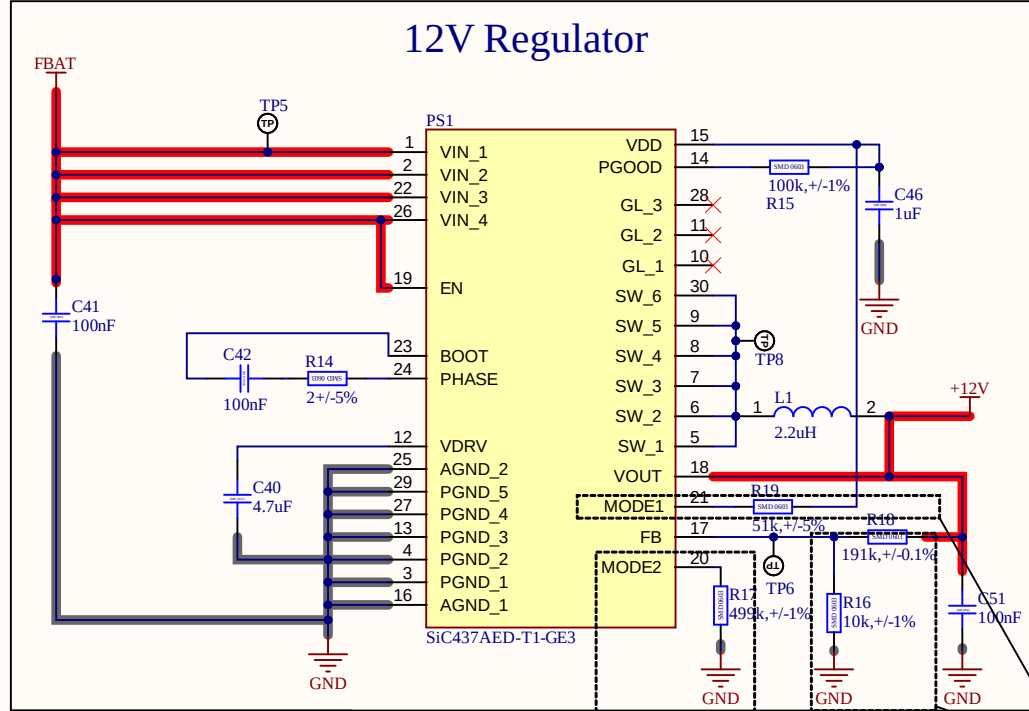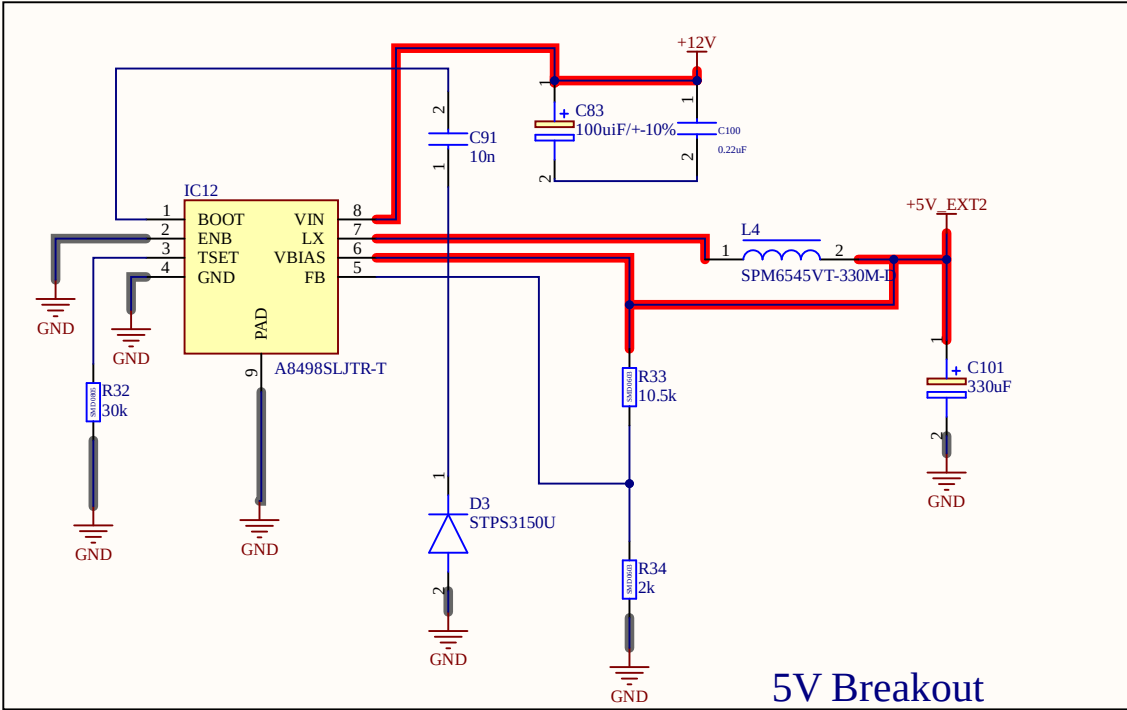

Title		
Size B	Number	Revision
Date:	2-04-2026	Sheet of
File:	C:\Users\...\3V3Reg.SchDoc	Drawn By:

