

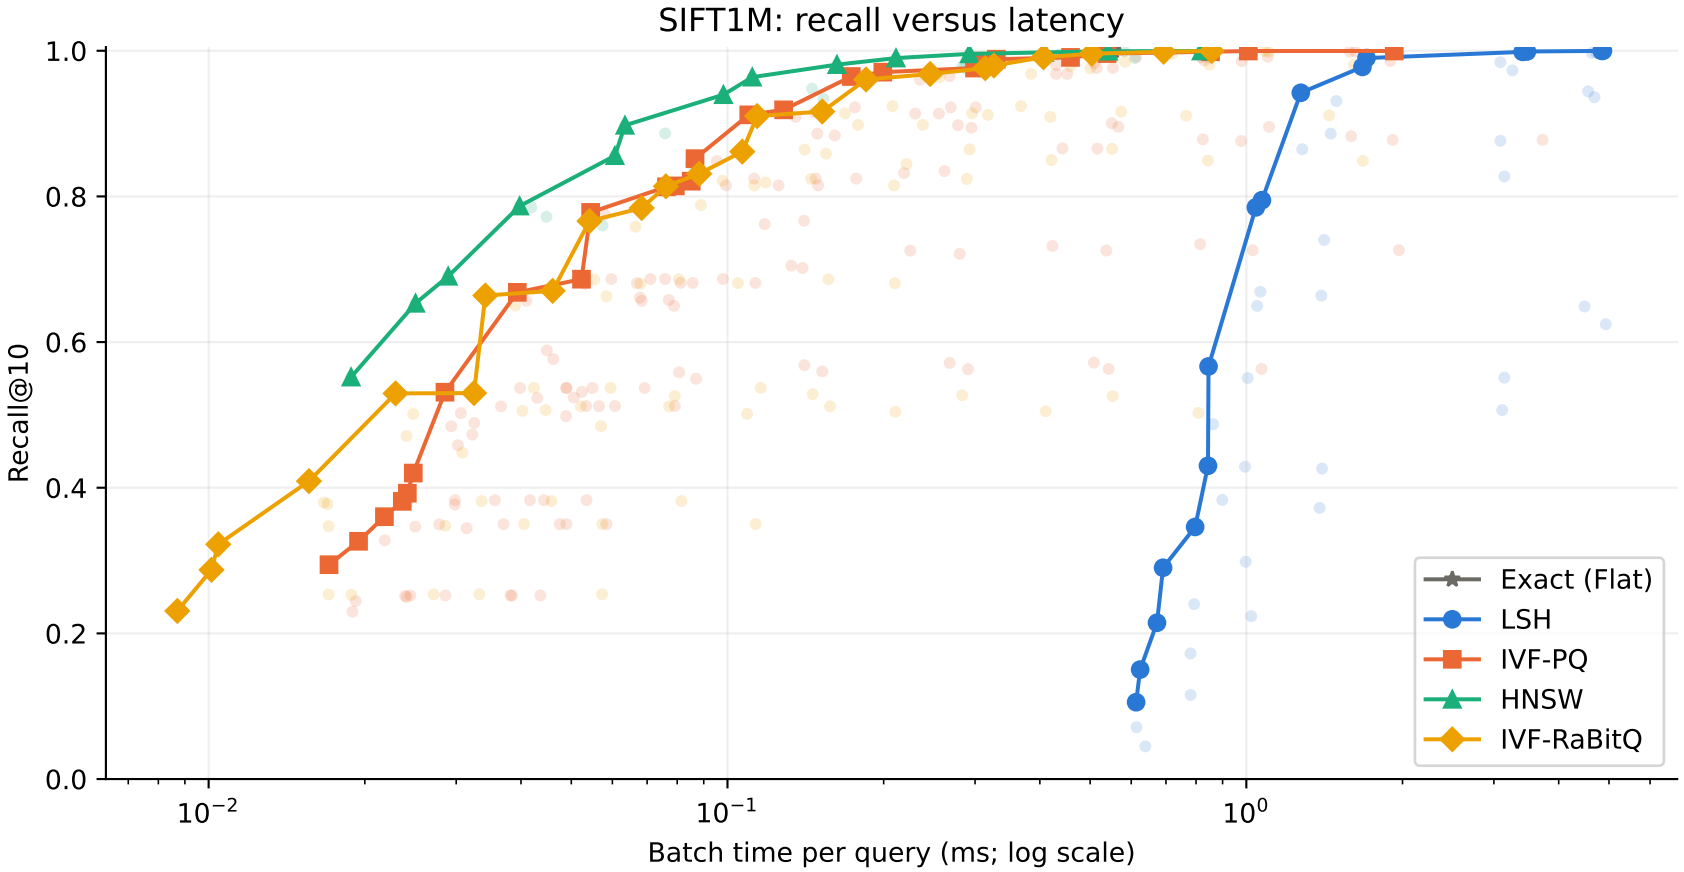



Faint points: all measured configurations. Lines: per-algorithm measured Pareto frontier; connecting segments are visual guides.

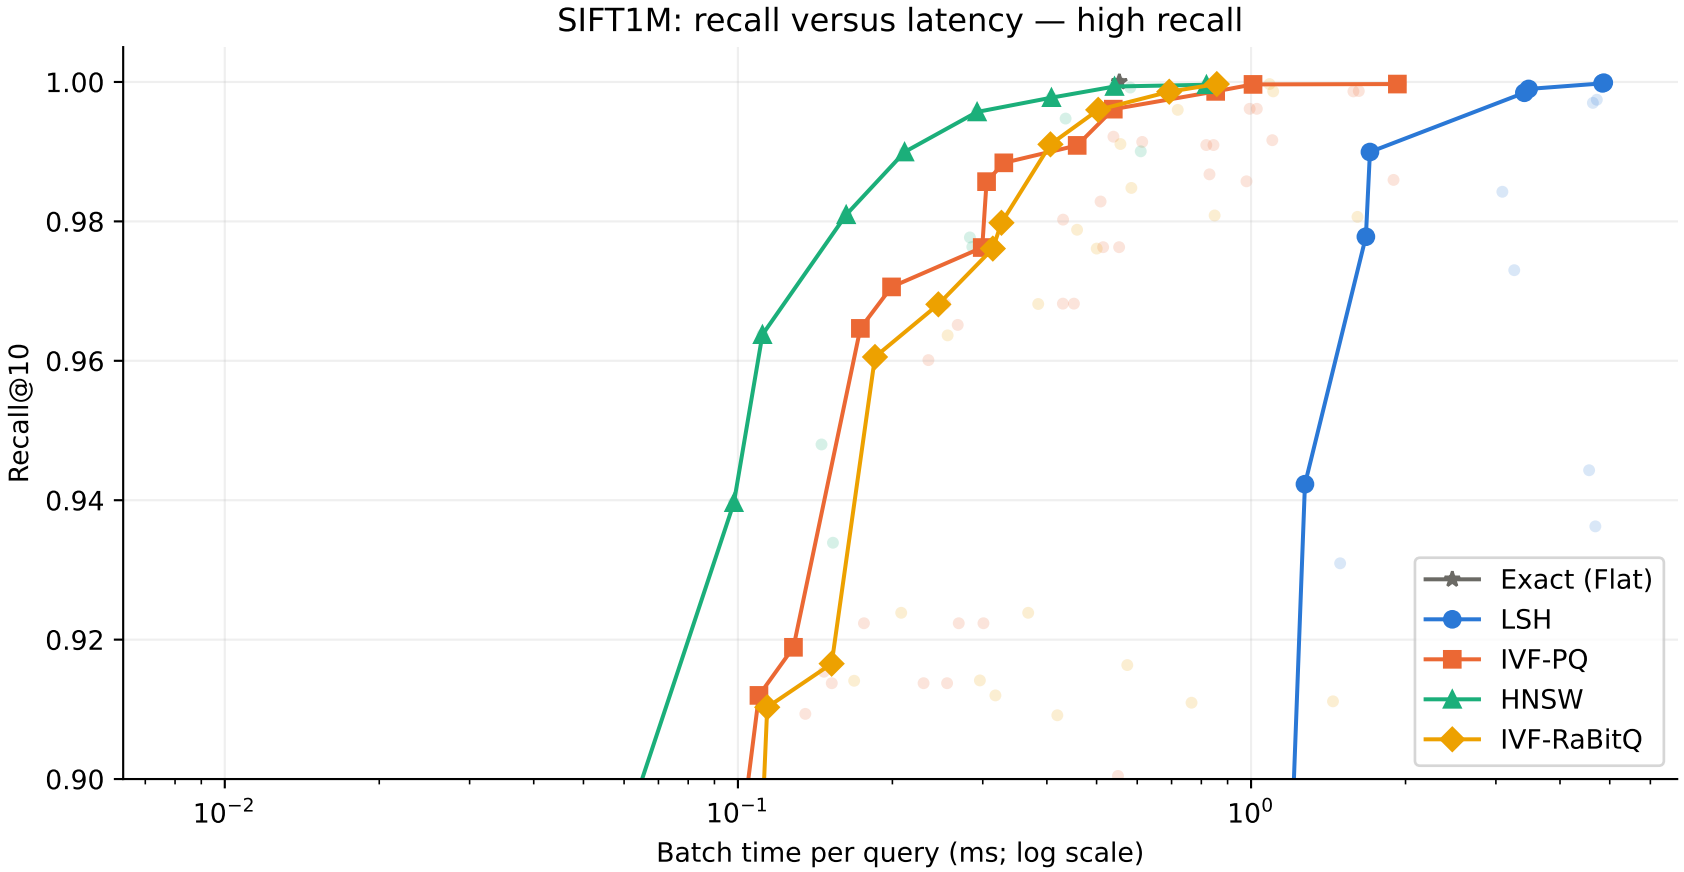


Faint points: all measured configurations. Lines: per-algorithm measured Pareto frontier; connecting segments are visual guides.

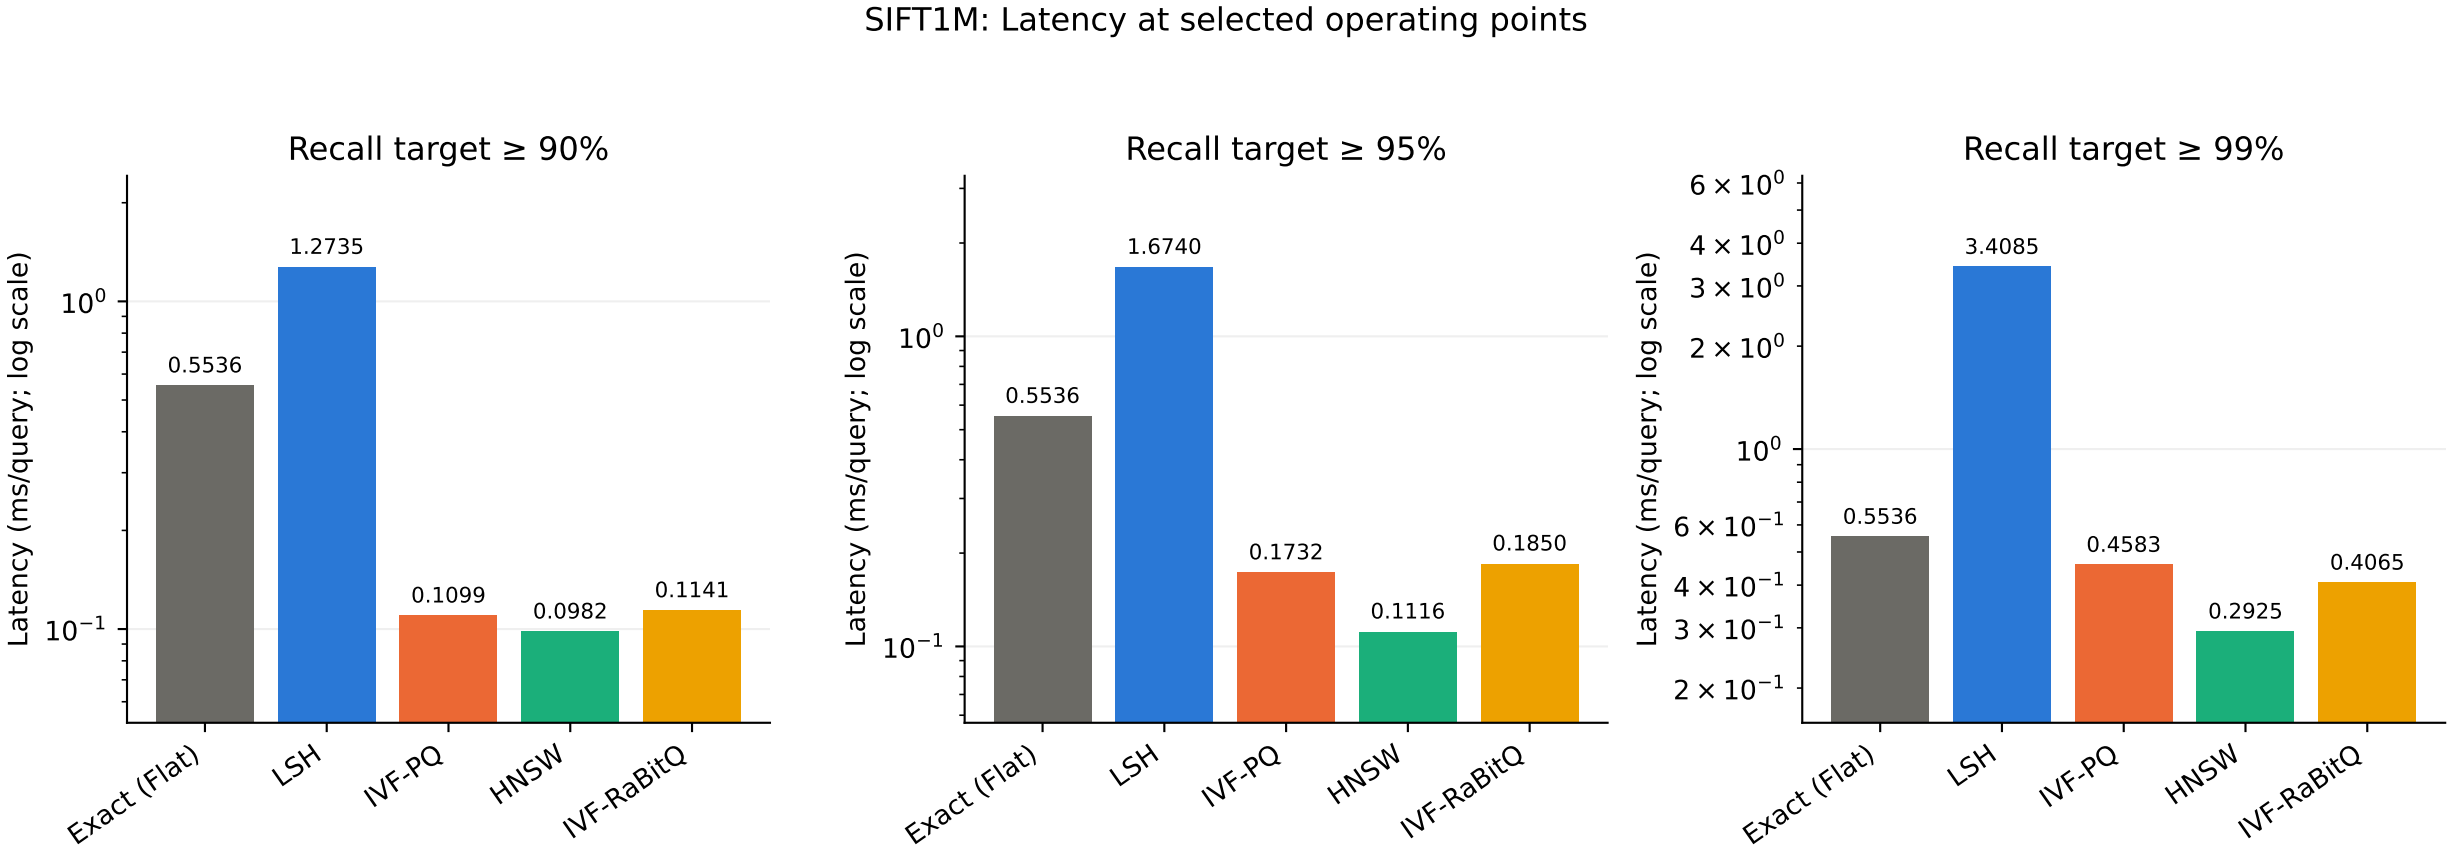


Each bar uses the fastest measured configuration meeting its recall target. Builds may differ between targets; see selected_configs.csv.

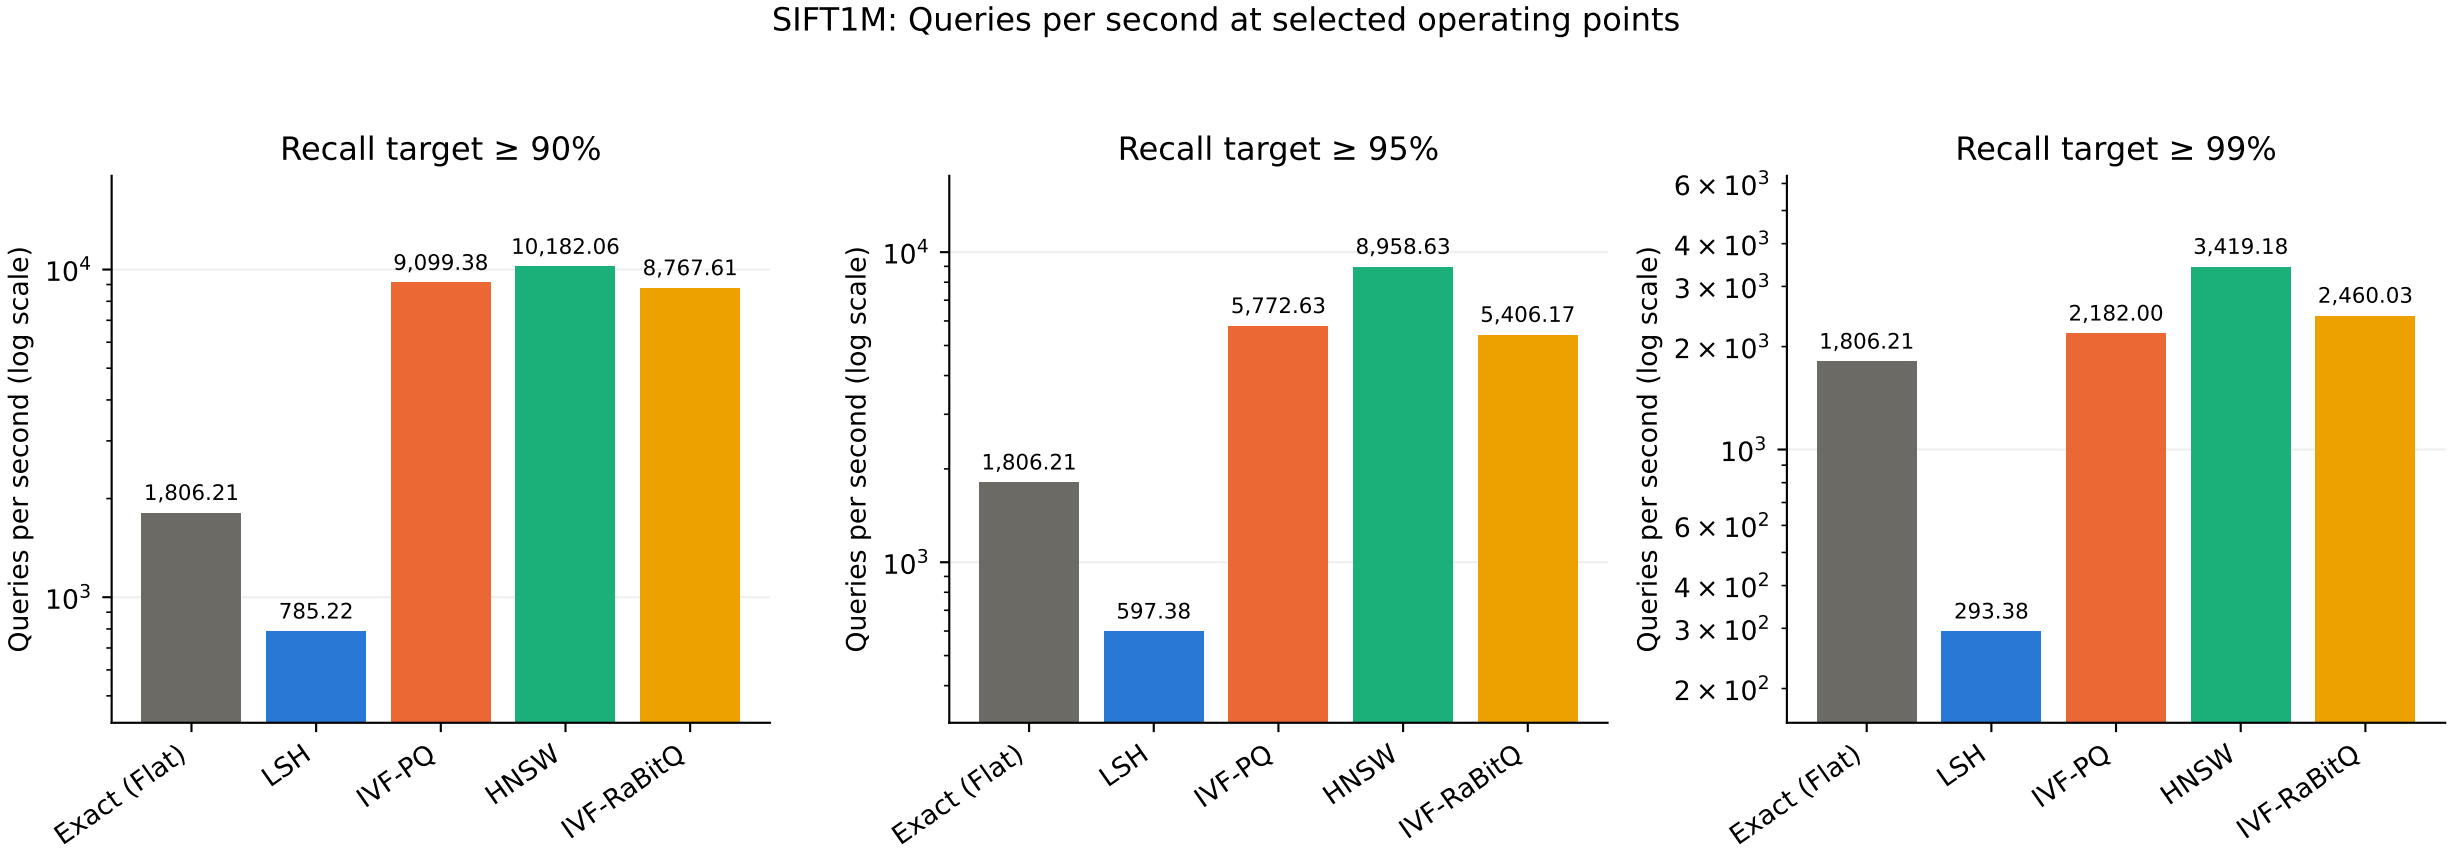


Each bar uses the fastest measured configuration meeting its recall target. Builds may differ between targets; see selected_configs.csv.

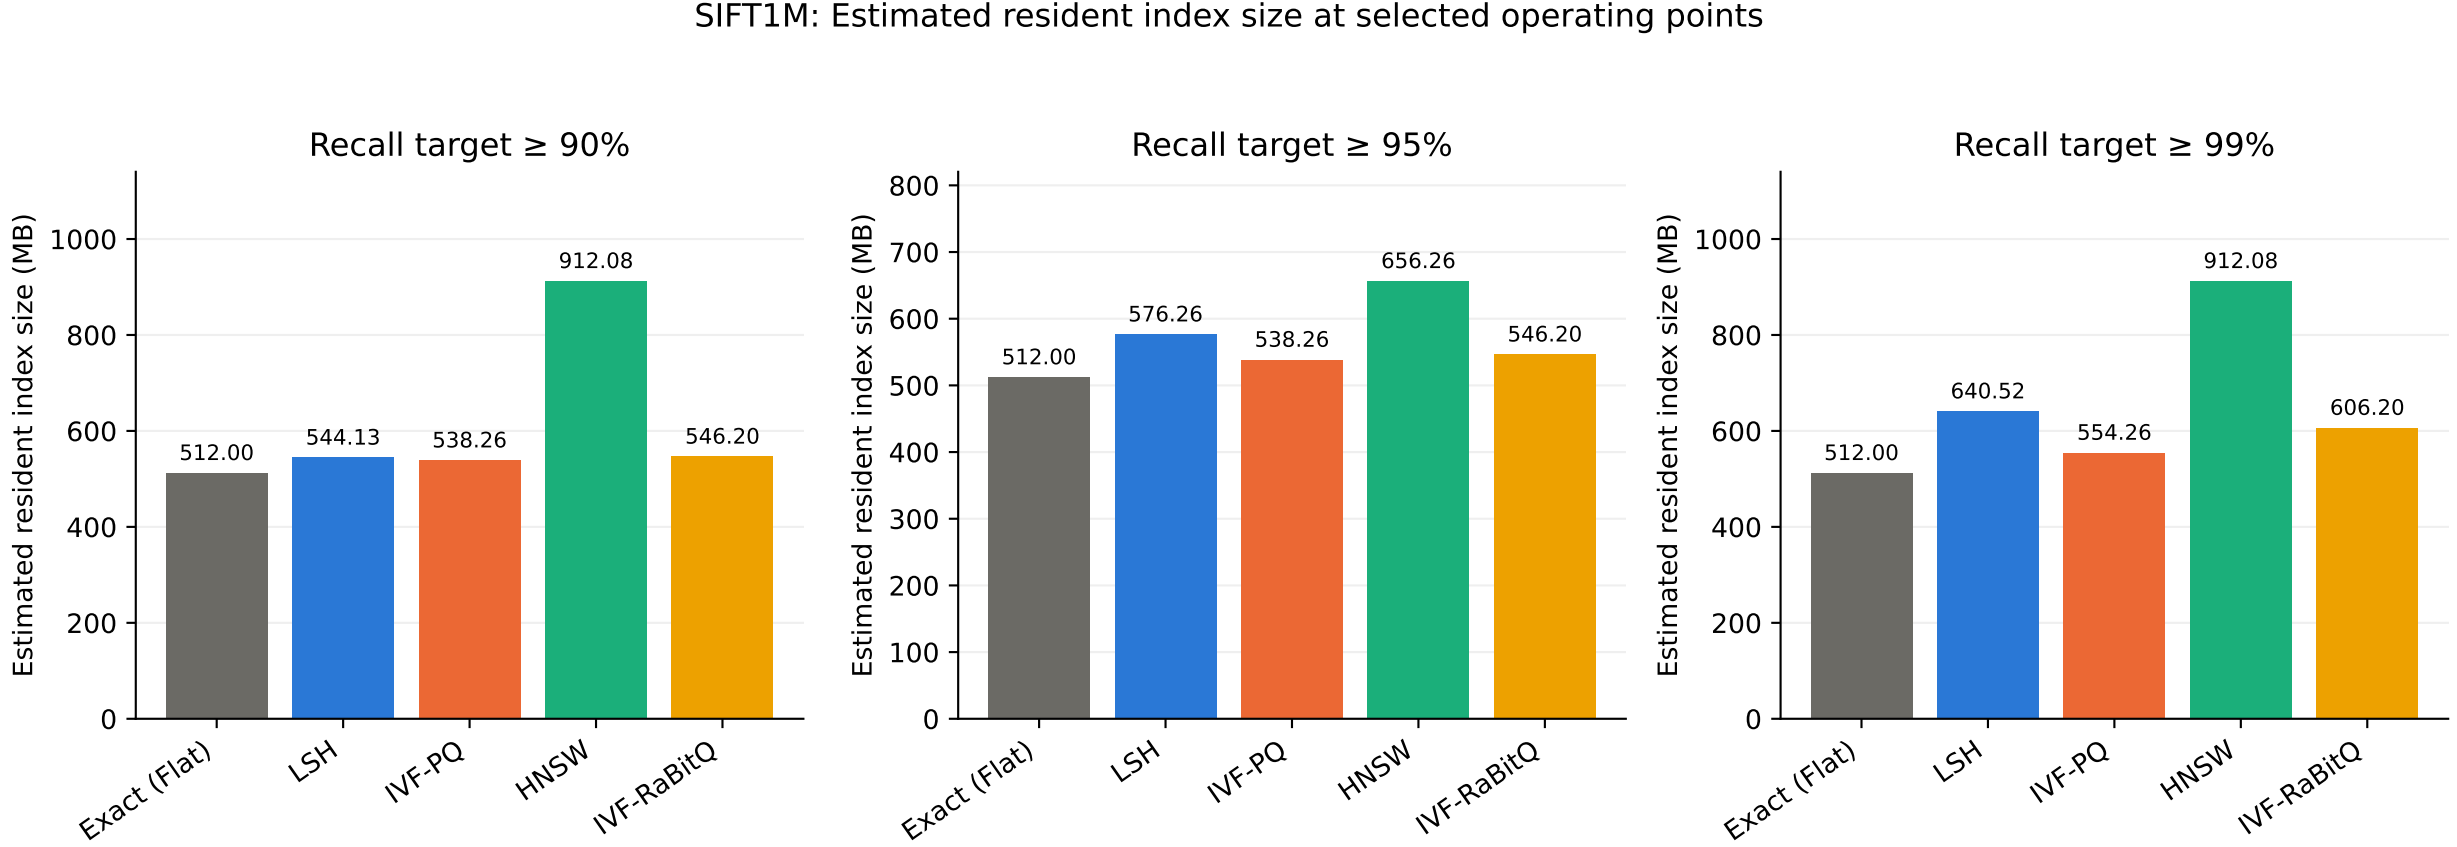


Each bar uses the fastest measured configuration meeting its recall target. Builds may differ between targets; see selected_configs.csv.

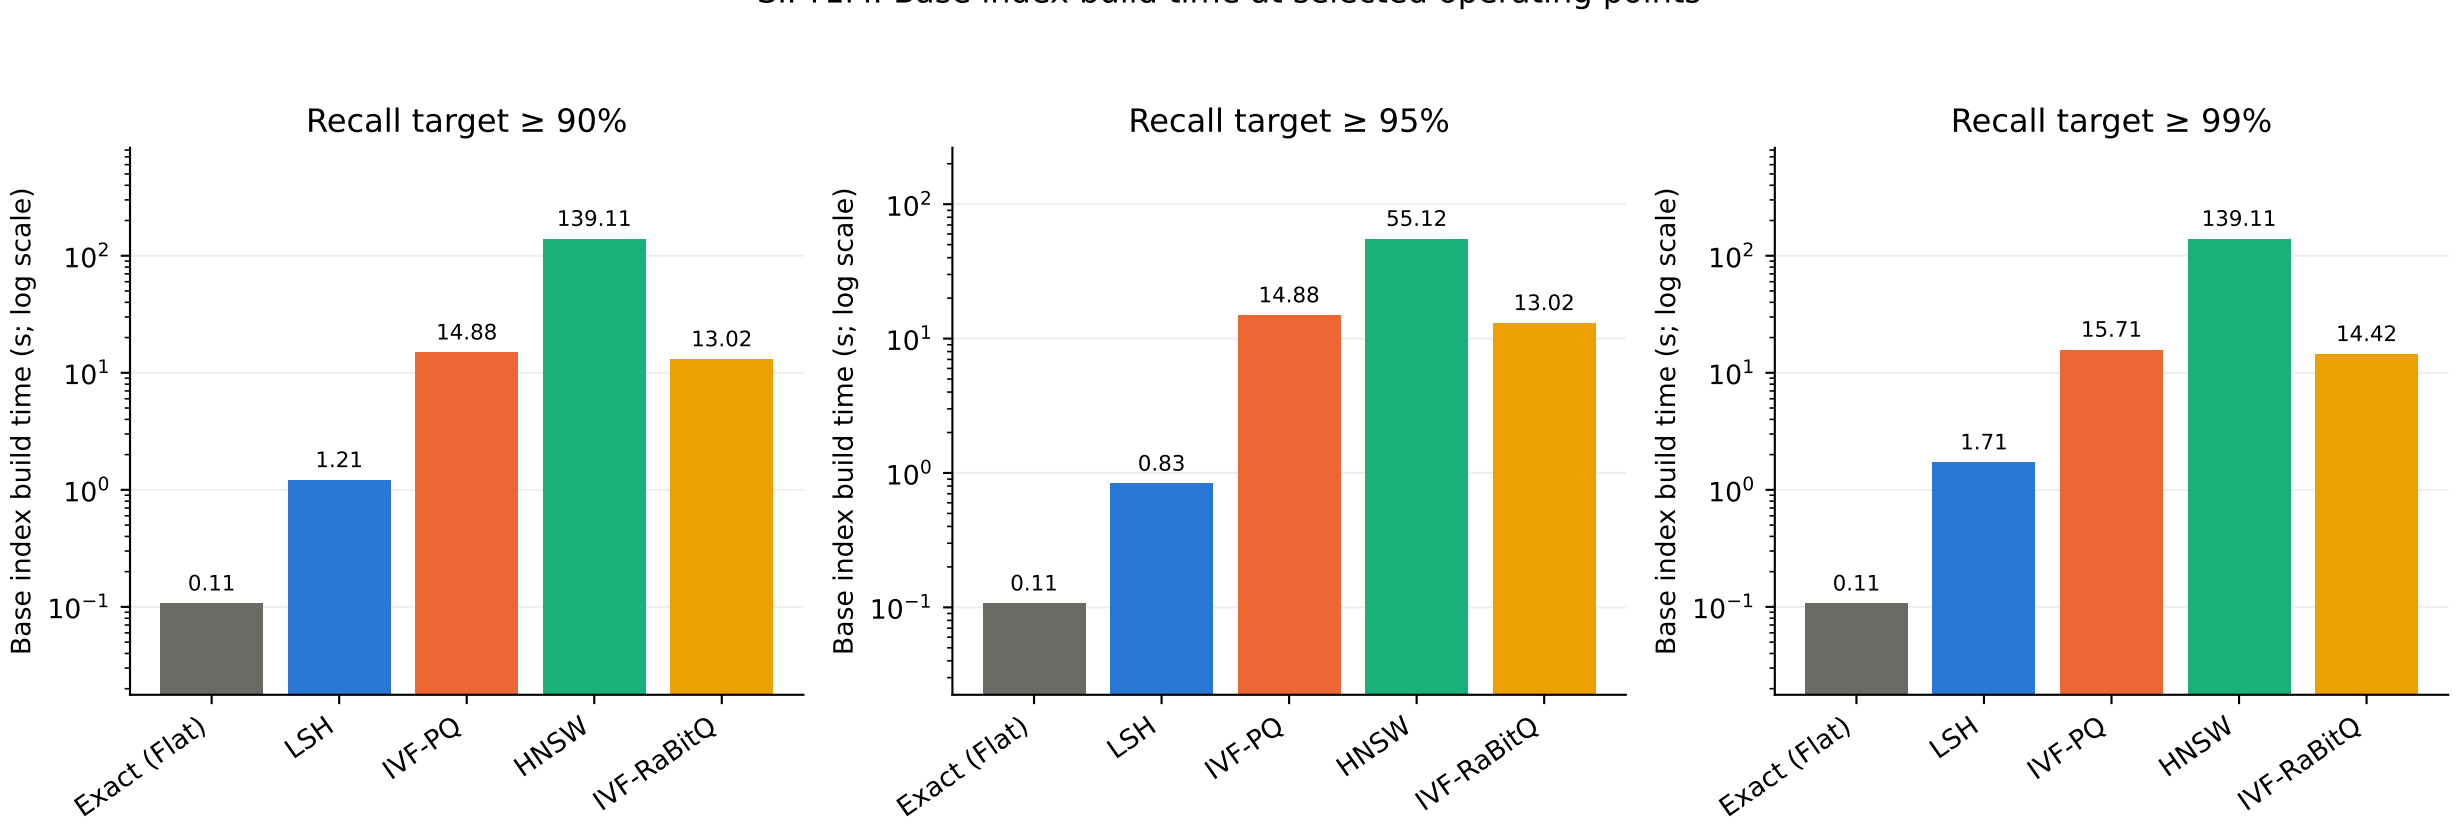


Each bar uses the fastest measured configuration meeting its recall target. Builds may differ between targets; see selected_configs.csv.

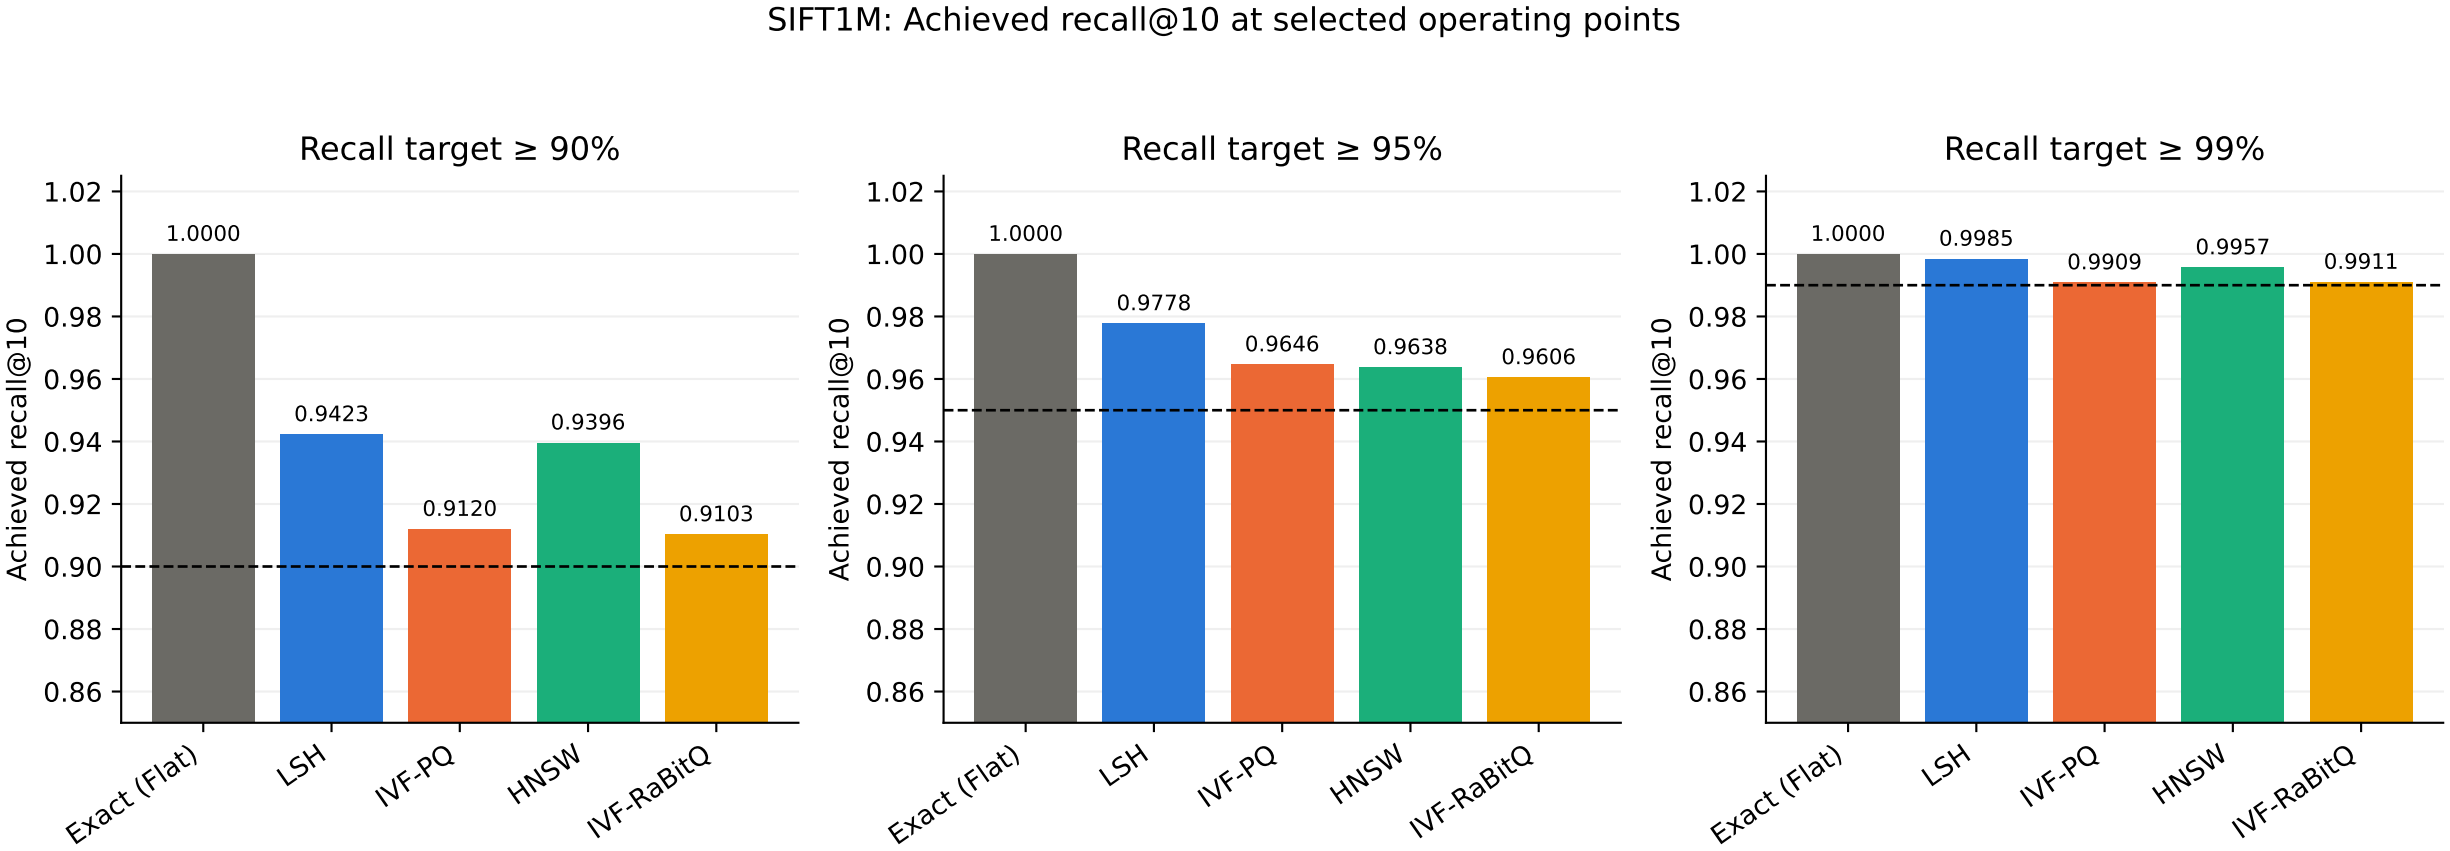


Each bar uses the fastest measured configuration meeting its recall target. Builds may differ between targets; see selected_configs.csv.

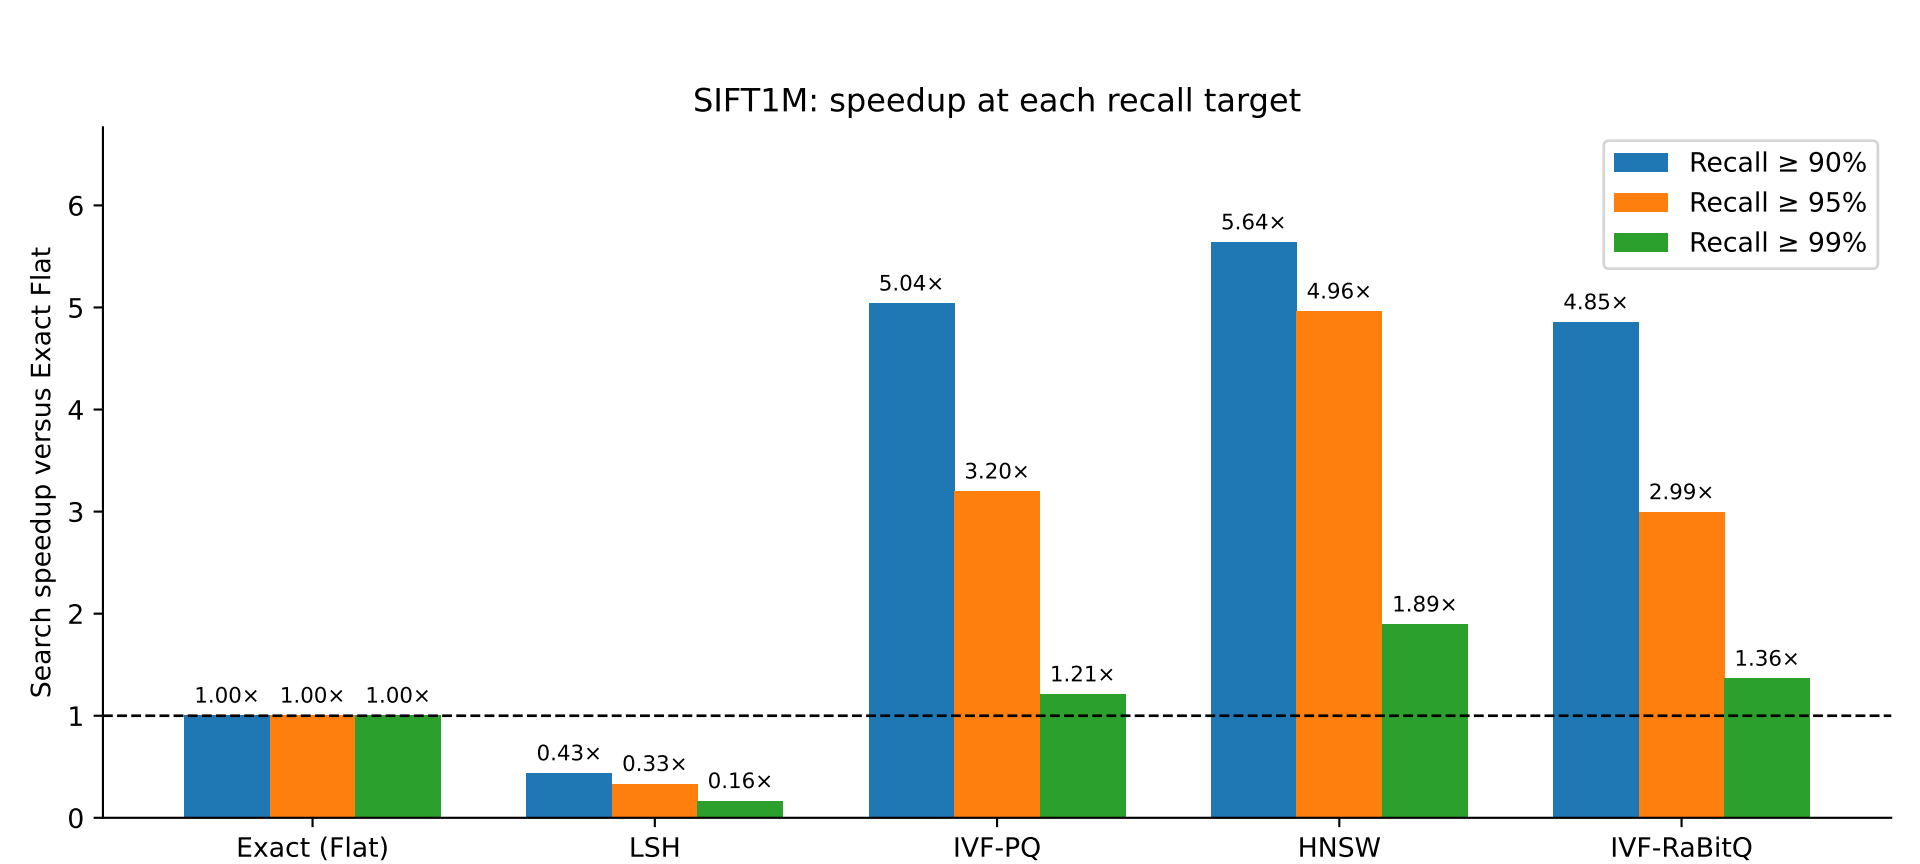

Speedup = Flat latency / selected latency. Above 1× is faster than Flat; below 1× is slower.

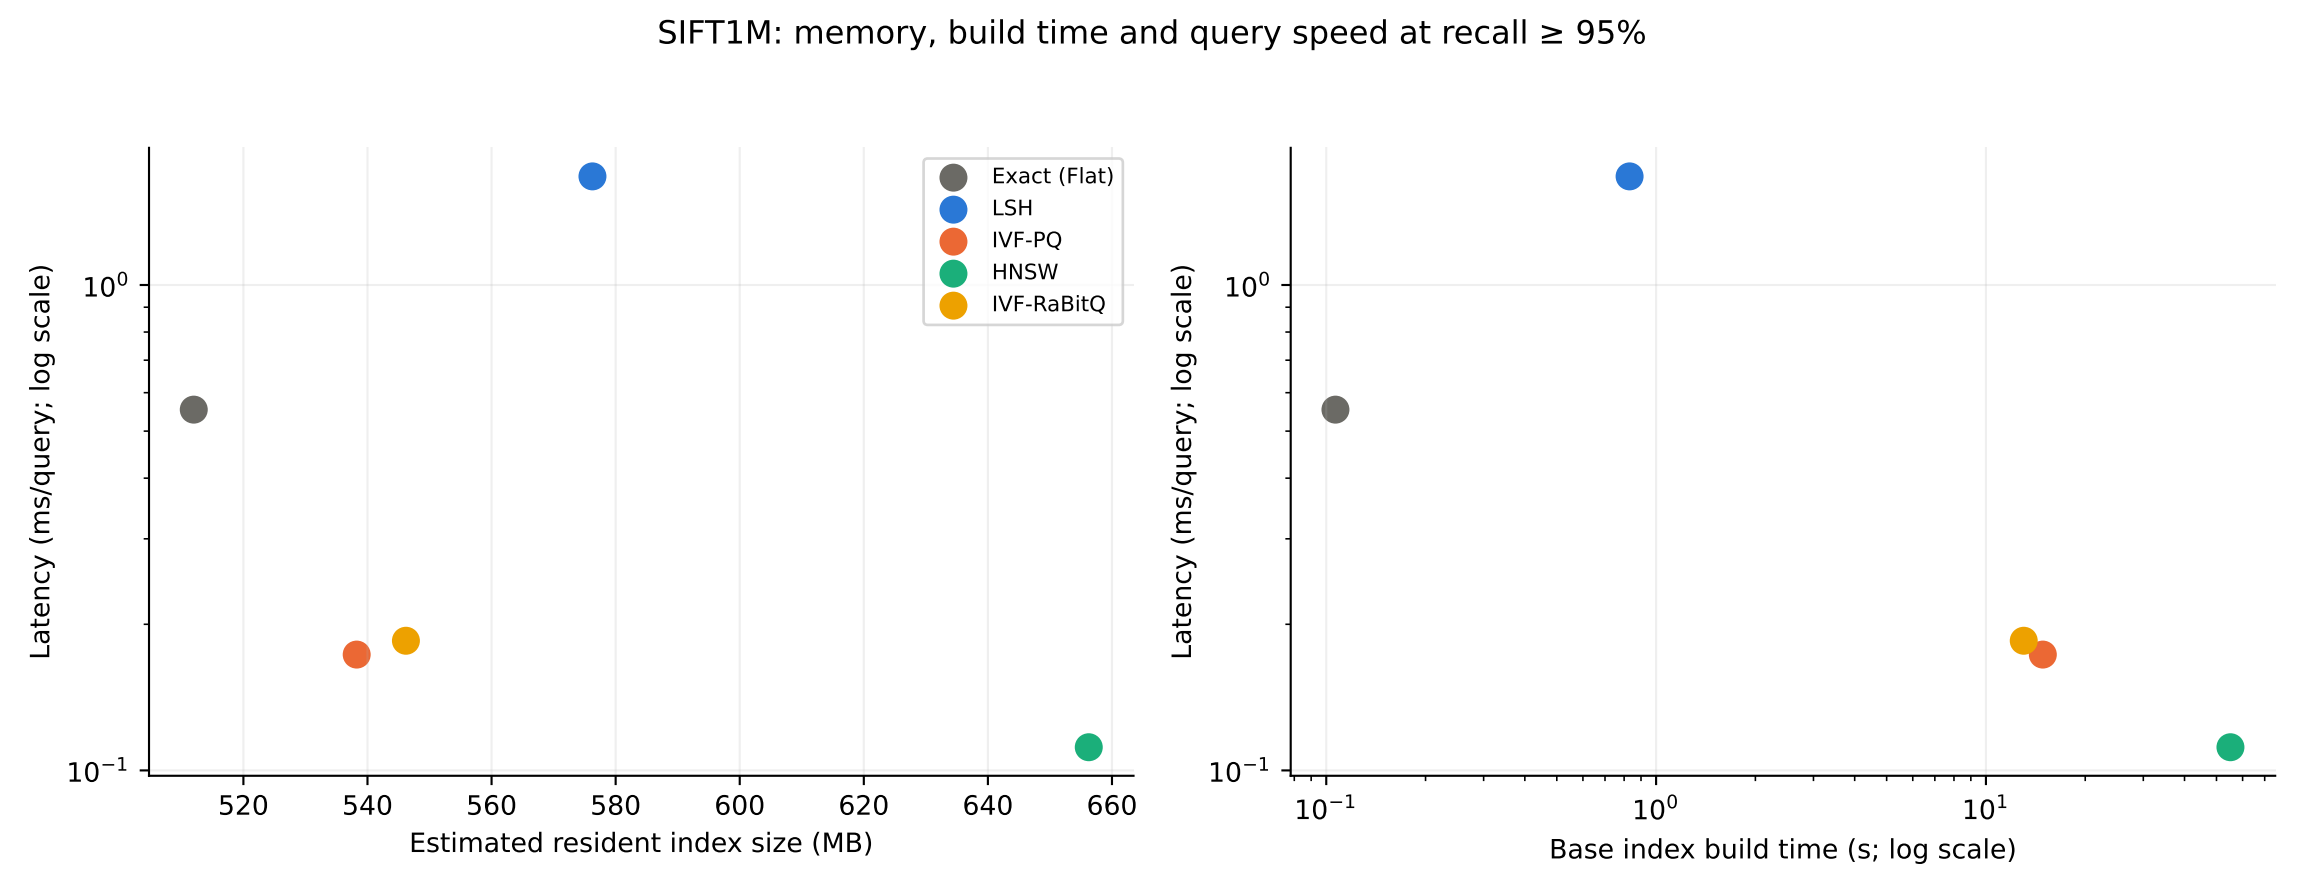

Lower and further left is better. Each point uses that algorithm’s fastest measured configuration reaching 95% recall.

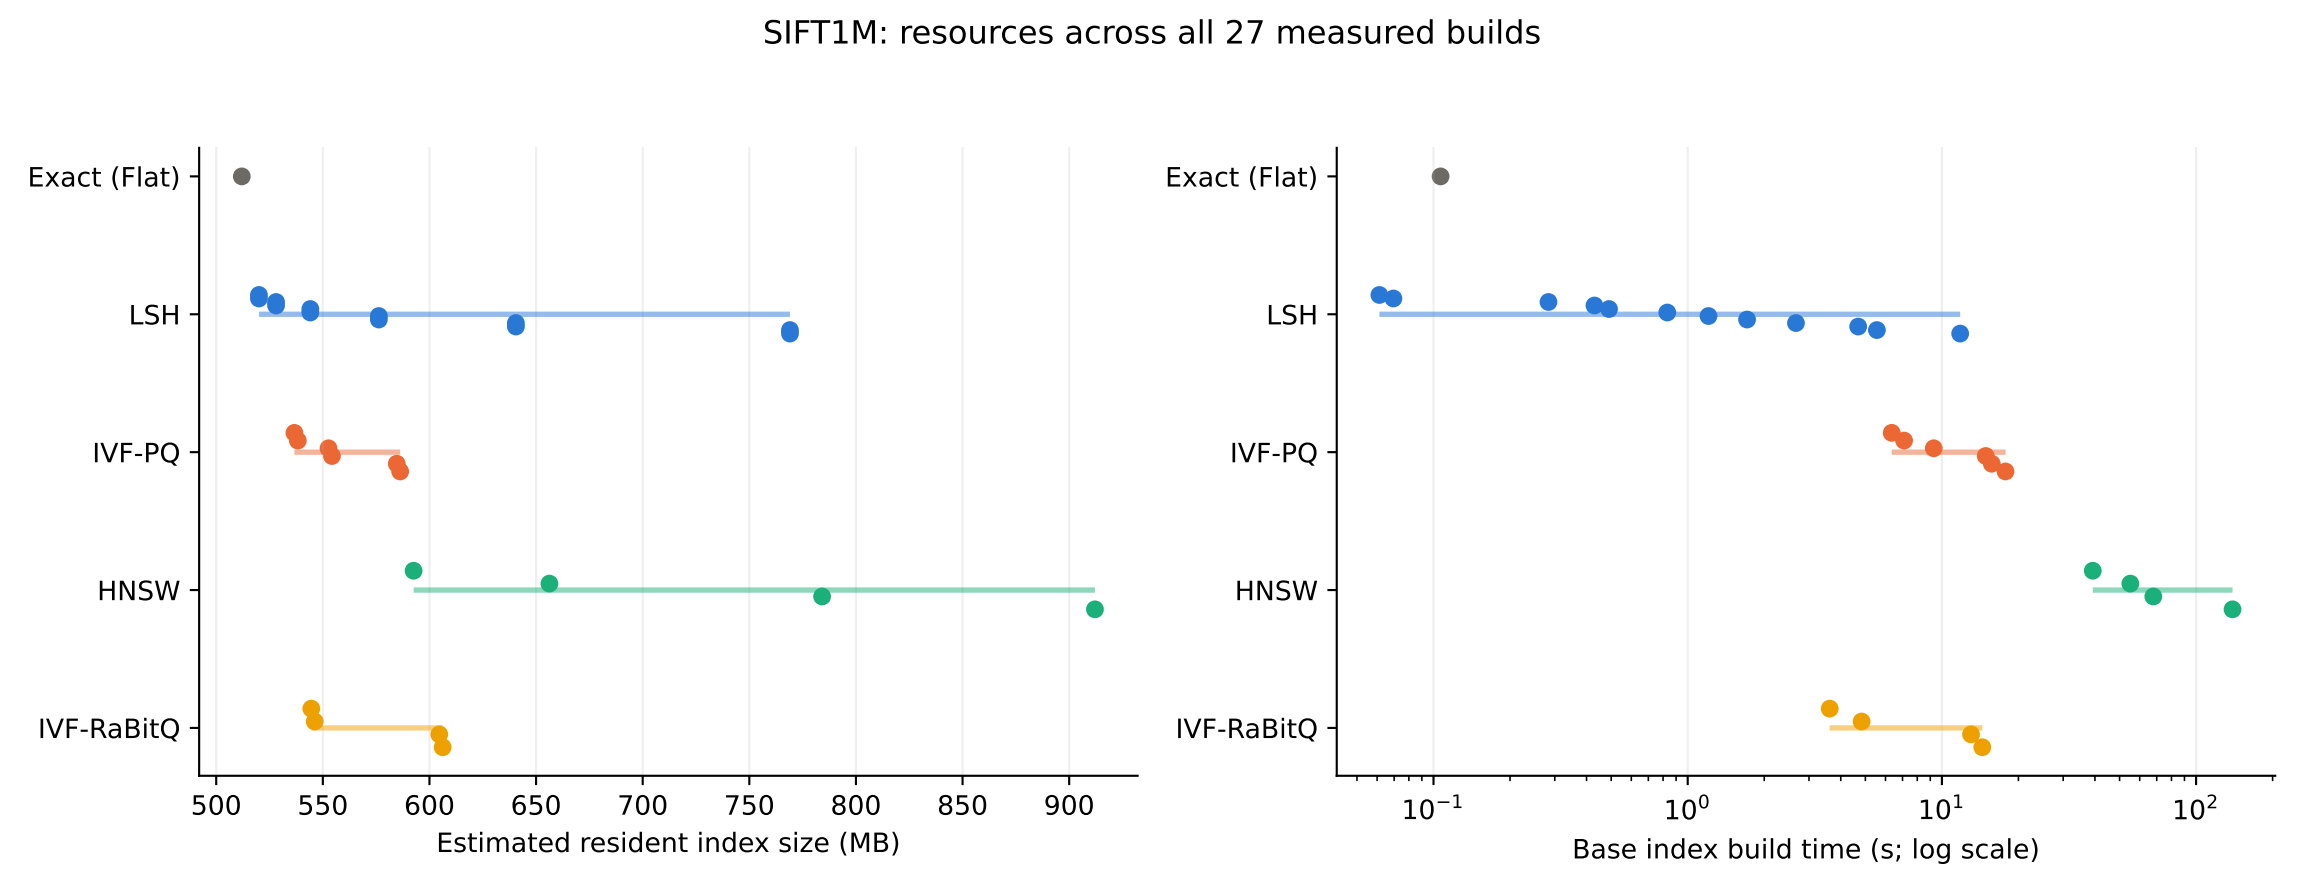

Each dot is one distinct build; horizontal lines show observed ranges. Vertical offsets only separate overlapping dots.