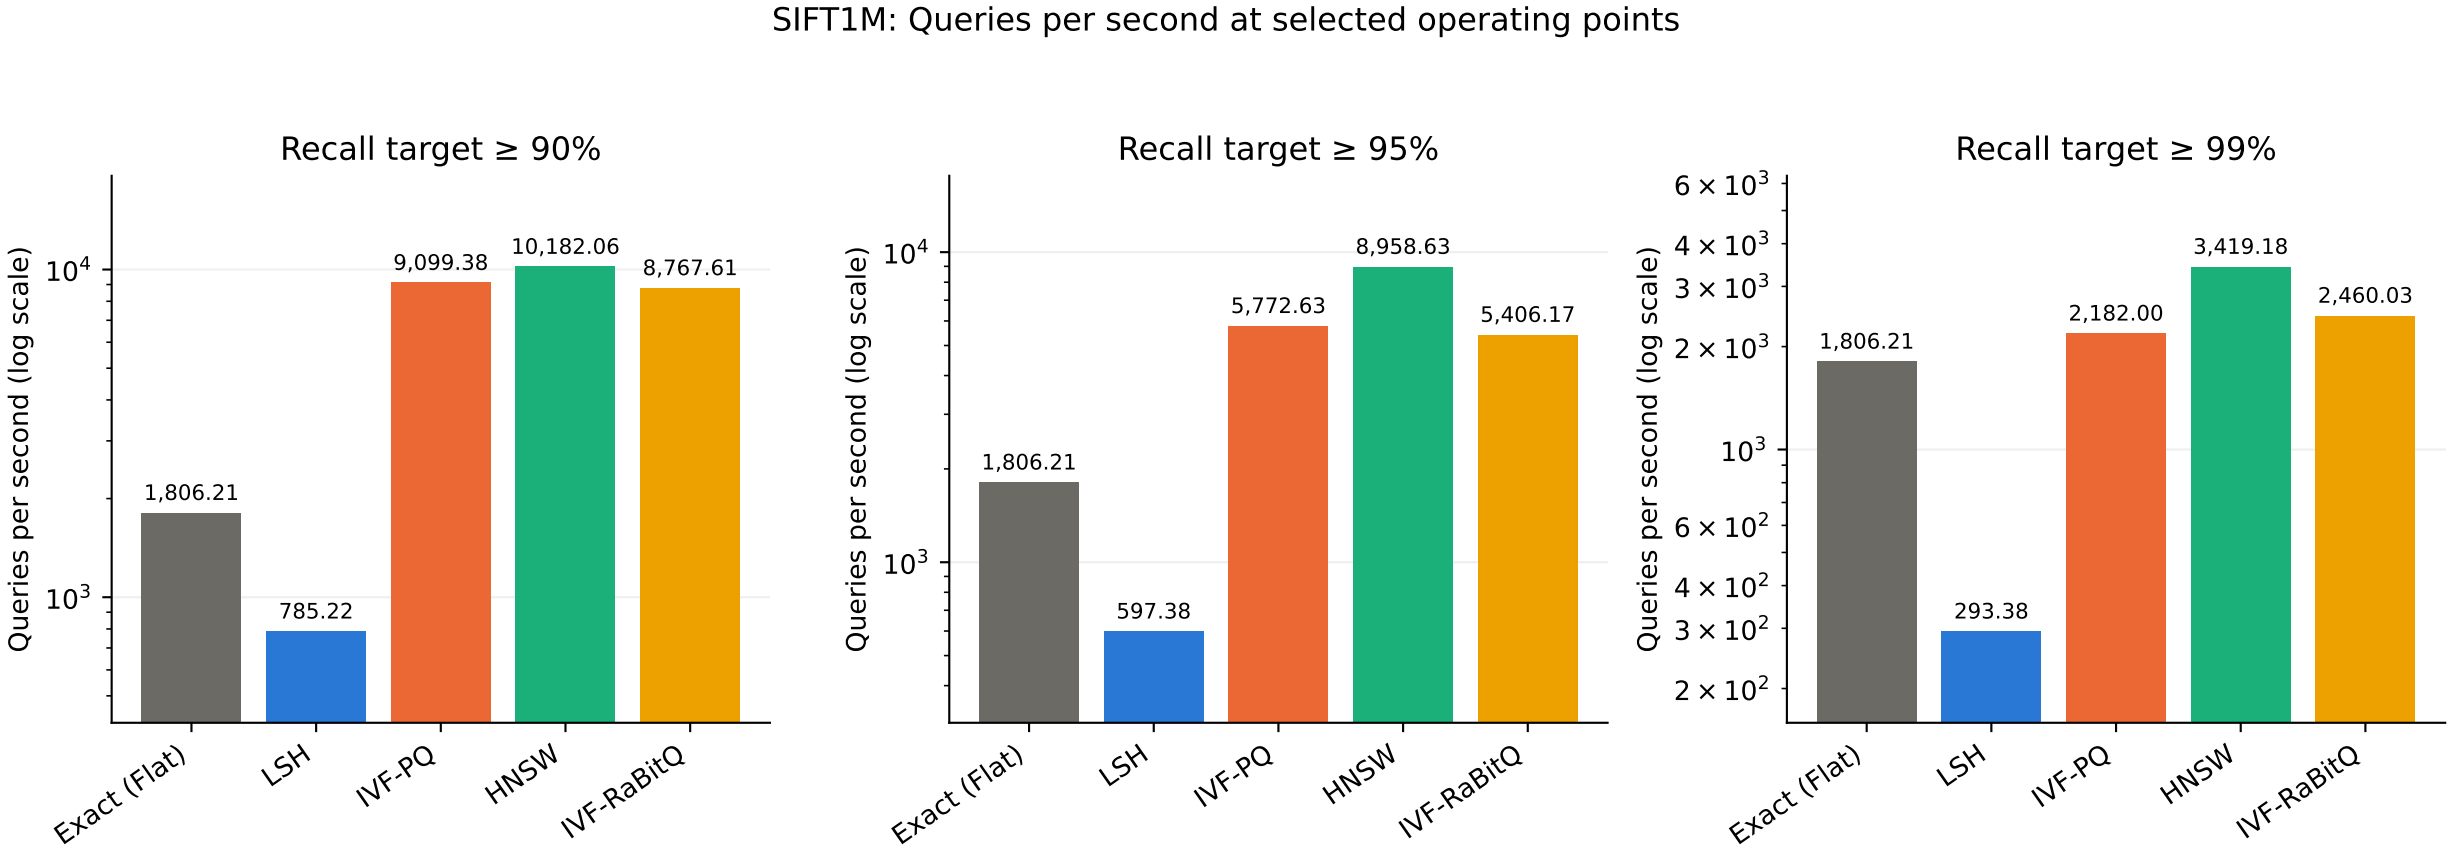

Each bar uses the fastest measured configuration meeting its recall target. Builds may differ between targets; see selected_configs.csv.