

Applicator	Dusty Crophopper
	Dusty's Fly-On Farming
	123 Airport Rd
	Propwash Junction, ID 61843
	(217) 555-8080
	dusty@dustysflyonfarming.com





Aircraft	Reg. #:	N802EX
	Series:	1
	Make:	Air Tractor
	Model:	AT-802A
	Wingspan:	59 ft
	Winglets?:	No

Spray System	Target Swath:	70.0 ft
	Target Rate:	5 gal/a
	Boom Pressure:	45 psi
	Boom Width:	73%
	Boom Drop:	18 in
	Nozzle Spacing:	11 in

Nozzles	Set #1
	CP11TT 40°F FF @ 0°
	Orif#25 x54
	Set #2

Observables		Pass 1	Pass 2	Pass 3	Average
	Airspeed:	161	174	168	168 mph
	Spray Height:	15.0	13.0	13.0	13.7 ft
	Wind Speed:	2	3	3	2.7 mph
	X-Wind Speed:	-1.1	-0.2	0.6	-0.21 mph
	Temperature:	60	60	60	60 °F
	Humidity:	59	59	59	59%

Setup Notes	
	Increased pump fan pitch

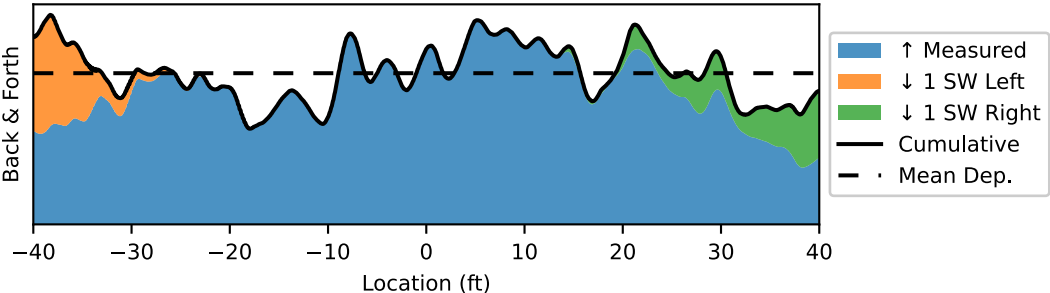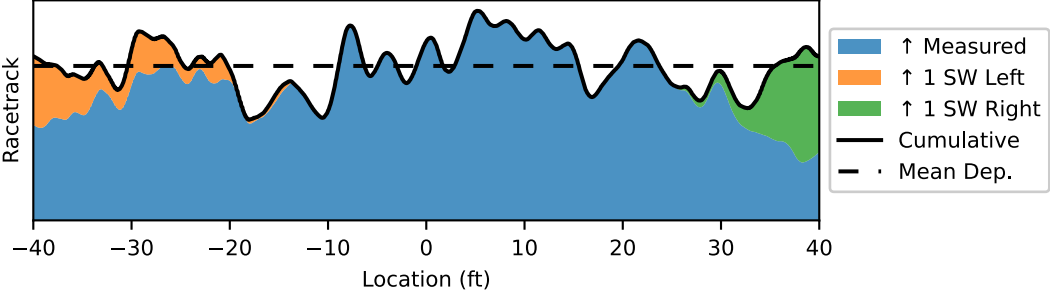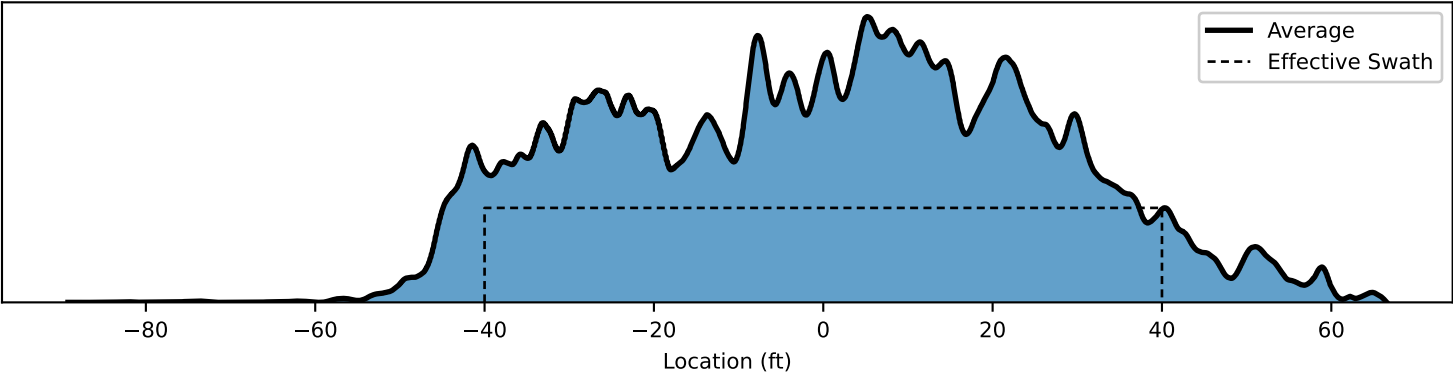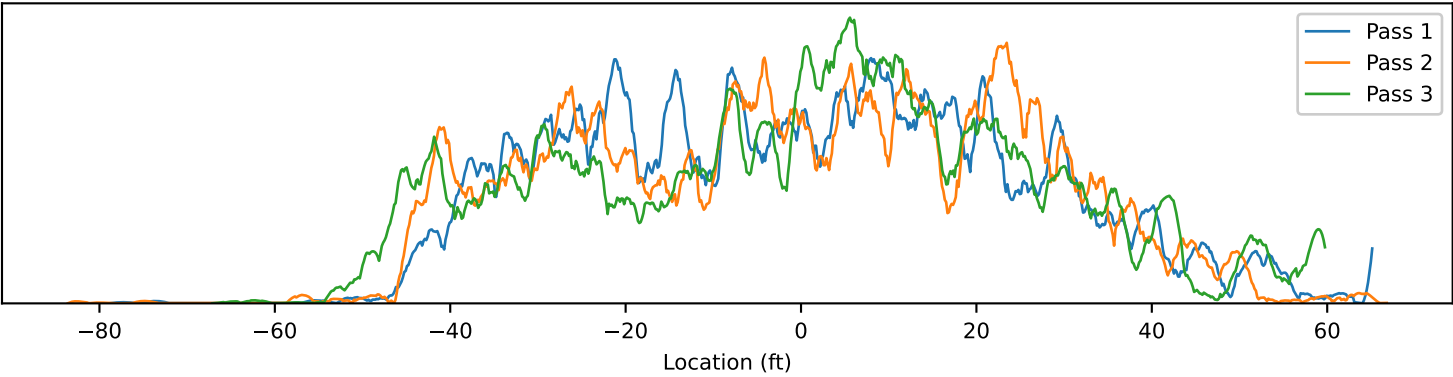

Swath	RT	BF
70.0 ft	15 %	20 %
72.0 ft	15 %	20 %
74.0 ft	15 %	19 %
76.0 ft	14 %	18 %
78.0 ft	15 %	18 %
80.0 ft	16 %	18 %
82.0 ft	17 %	19 %
84.0 ft	19 %	20 %
86.0 ft	21 %	21 %
88.0 ft	23 %	22 %
90.0 ft	25 %	23 %

Applicator	Dusty Crophopper
	Dusty's Fly-On Farming
	123 Airport Rd
	Propwash Junction, ID 61843
	(217) 555-8080
	dusty@dustysflyonfarming.com




Aircraft	Reg. #:	N802EX
	Series:	1
	Make:	Air Tractor
	Model:	AT-802A
	Wingspan:	59 ft
	Winglets?:	No

Spray System	Target Swath:	70.0 ft
	Target Rate:	5 gal/a
	Boom Pressure:	45 psi
	Boom Width:	73%
	Boom Drop:	18 in
	Nozzle Spacing:	11 in

Nozzles	Set #1
	CP11TT 40°F FF @ 0°
	Orif#25 x54
	Set #2

Observables		Pass 1	Average
	Airspeed:	161	161 mph
	Spray Height:	15.0	15 ft
	Wind Speed:	2	2 mph
	X-Wind Speed:	-1.1	-1.06 mph
	Temperature:	60	60 °F
	Humidity:	59	59%

Setup Notes	
	Increased pump fan pitch

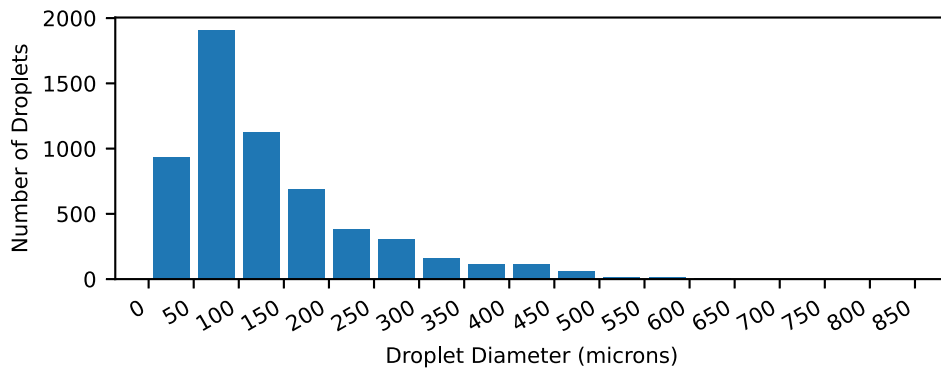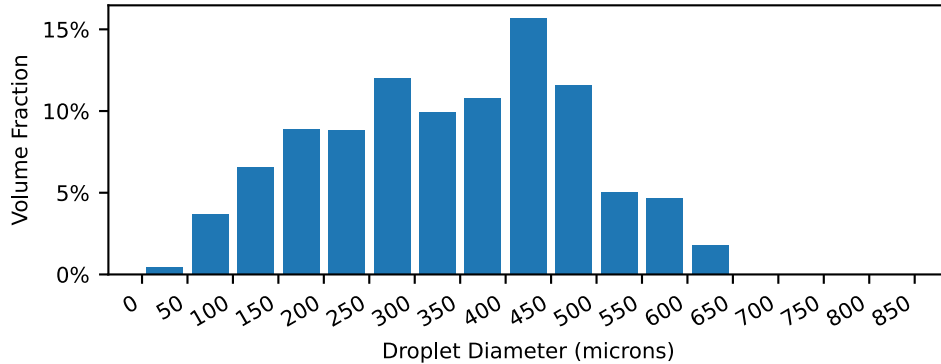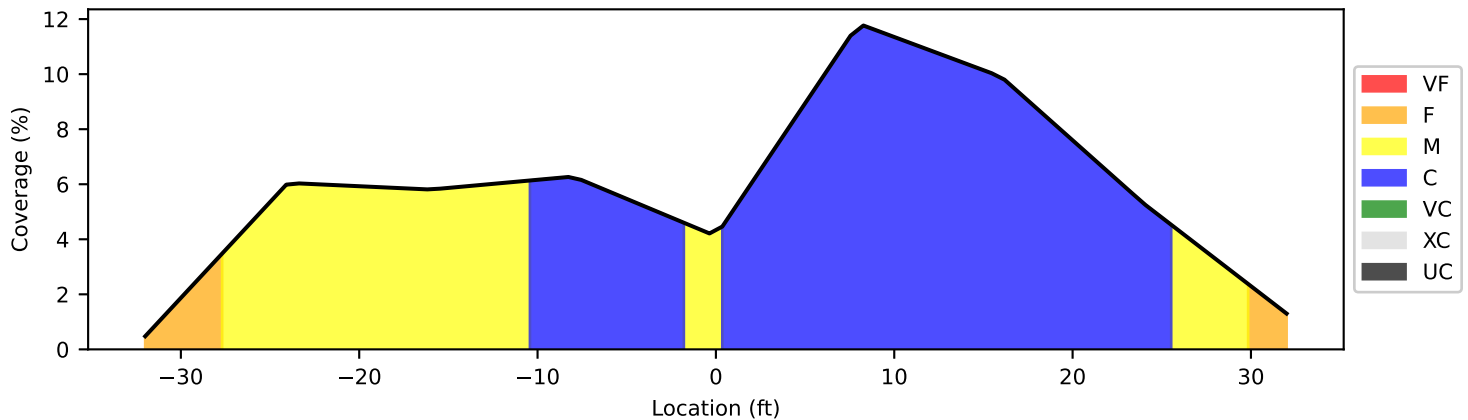


Composite - Pass 1	Category	Measured ^{1 2}	USDA Model ³
	Dv0.1	177 µm	126 µm
	Dv0.5	361 µm	305 µm
	Dv0.9	505 µm	603 µm
	RS	0.91	1.56
	Cov.	5.56%	
	Area	20.74 in²	
	Stains	5802	
	D / in2	280	

¹ Based on inputs, minimum detectable droplet diameter is 28 µm.

² Measured Droplet Spectrum Category is calculated with reference nozzle data, and should not be considered absolute.

³ USDA Model flow-weighted and interpolated composite calculation based on stated nozzle configuration and quantities.

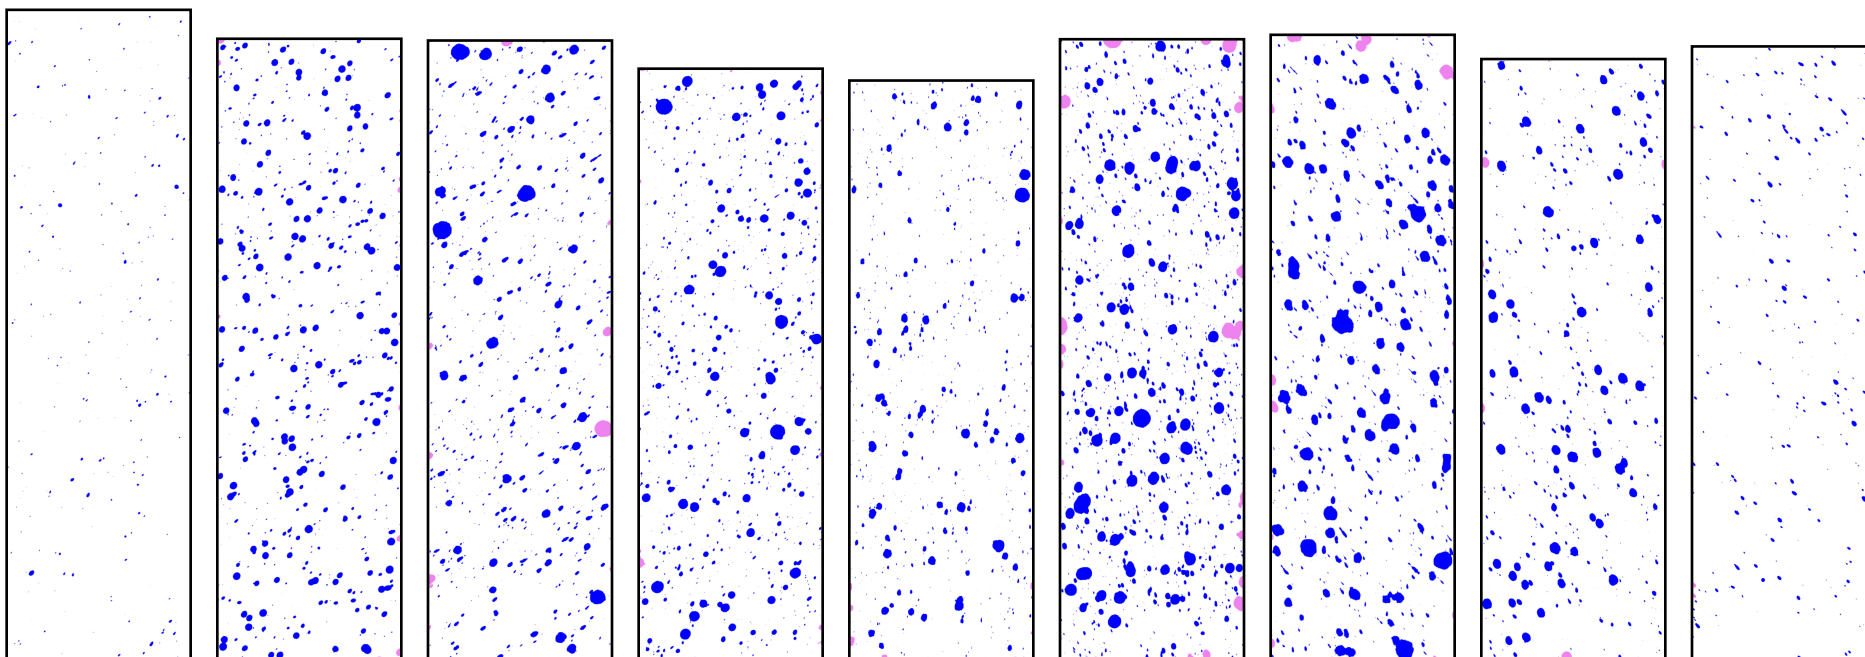

L-32		L-24		L-16		L-8		Center		R-8		R-16		R-24		R-32	
DSC	F	DSC	M	DSC	M	DSC	C	DSC	M	DSC	C	DSC	C	DSC	C	DSC	F
Dv0.1	90 μm	Dv0.1	192 μm	Dv0.1	164 μm	Dv0.1	172 μm	Dv0.1	160 μm	Dv0.1	185 μm	Dv0.1	198 μm	Dv0.1	199 μm	Dv0.1	134 μm
VMD	150 μm	VMD	323 μm	VMD	316 μm	VMD	376 μm	VMD	354 μm	VMD	412 μm	VMD	394 μm	VMD	409 μm	VMD	211 μm
Dv0.9	228 μm	Dv0.9	403 μm	Dv0.9	563 μm	Dv0.9	489 μm	Dv0.9	481 μm	Dv0.9	534 μm	Dv0.9	551 μm	Dv0.9	456 μm	Dv0.9	279 μm
RS	0.92	RS	0.65	RS	1.26	RS	0.84	RS	0.91	RS	0.85	RS	0.90	RS	0.63	RS	0.69
Cov.	0.48%	Cov.	6.05%	Cov.	5.81%	Cov.	6.28%	Cov.	4.11%	Cov.	11.83%	Cov.	9.90%	Cov.	5.29%	Cov.	1.30%
Area	2.24 in^2	Area	2.31 in^2	Area	2.33 in^2	Area	2.45 in^2	Area	2.51 in^2	Area	2.30 in^2	Area	1.83 in^2	Area	2.41 in^2	Area	2.36 in^2
St.	226	St.	597	St.	720	St.	917	St.	730	St.	1183	St.	622	St.	525	St.	282
St./ in^2	101	St./ in^2	258	St./ in^2	309	St./ in^2	374	St./ in^2	291	St./ in^2	515	St./ in^2	340	St./ in^2	218	St./ in^2	119