

SPECIFICATION

产品规格

1.Rating: DC 30V 0.5A 额定值: DC 30V 0.5A

2.Contact resistance :<0.03Ω;

接触电阻:<0.03Ω;

3.Insulation resistance: $>100M\Omega(DC250V)$

绝缘电阻: >100MΩ(DC250V)

4. Withstand voltage:500VAC;


耐受电压: 500VAC;


5.Insertion and extraction force:3-30N;

插拔力: 3-30N;

6.life test:5,000 cycles.

寿命试验: 5000次循环.

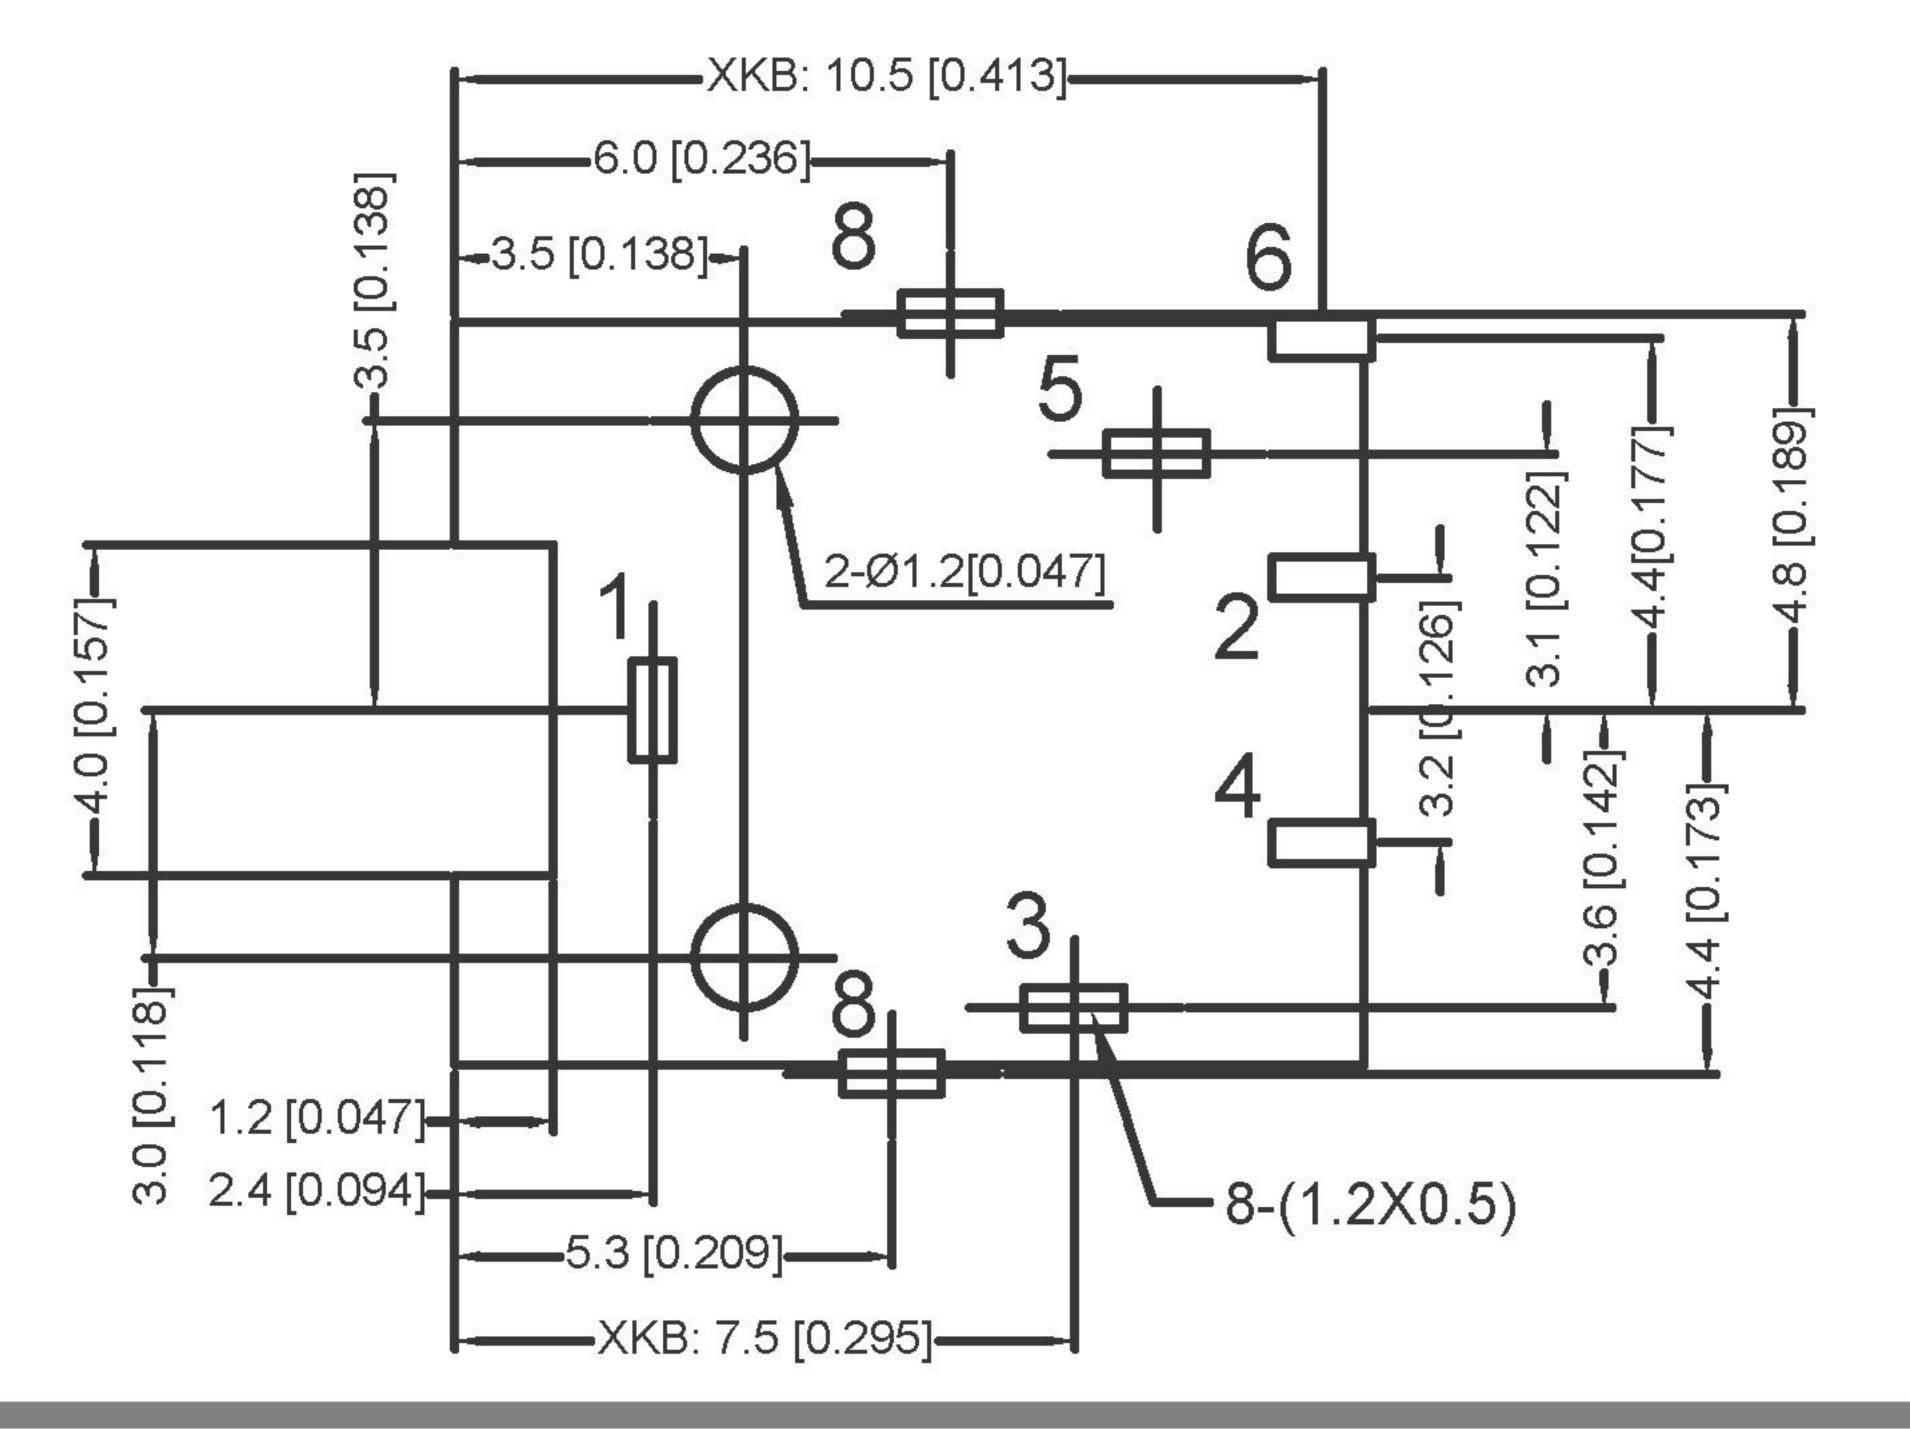

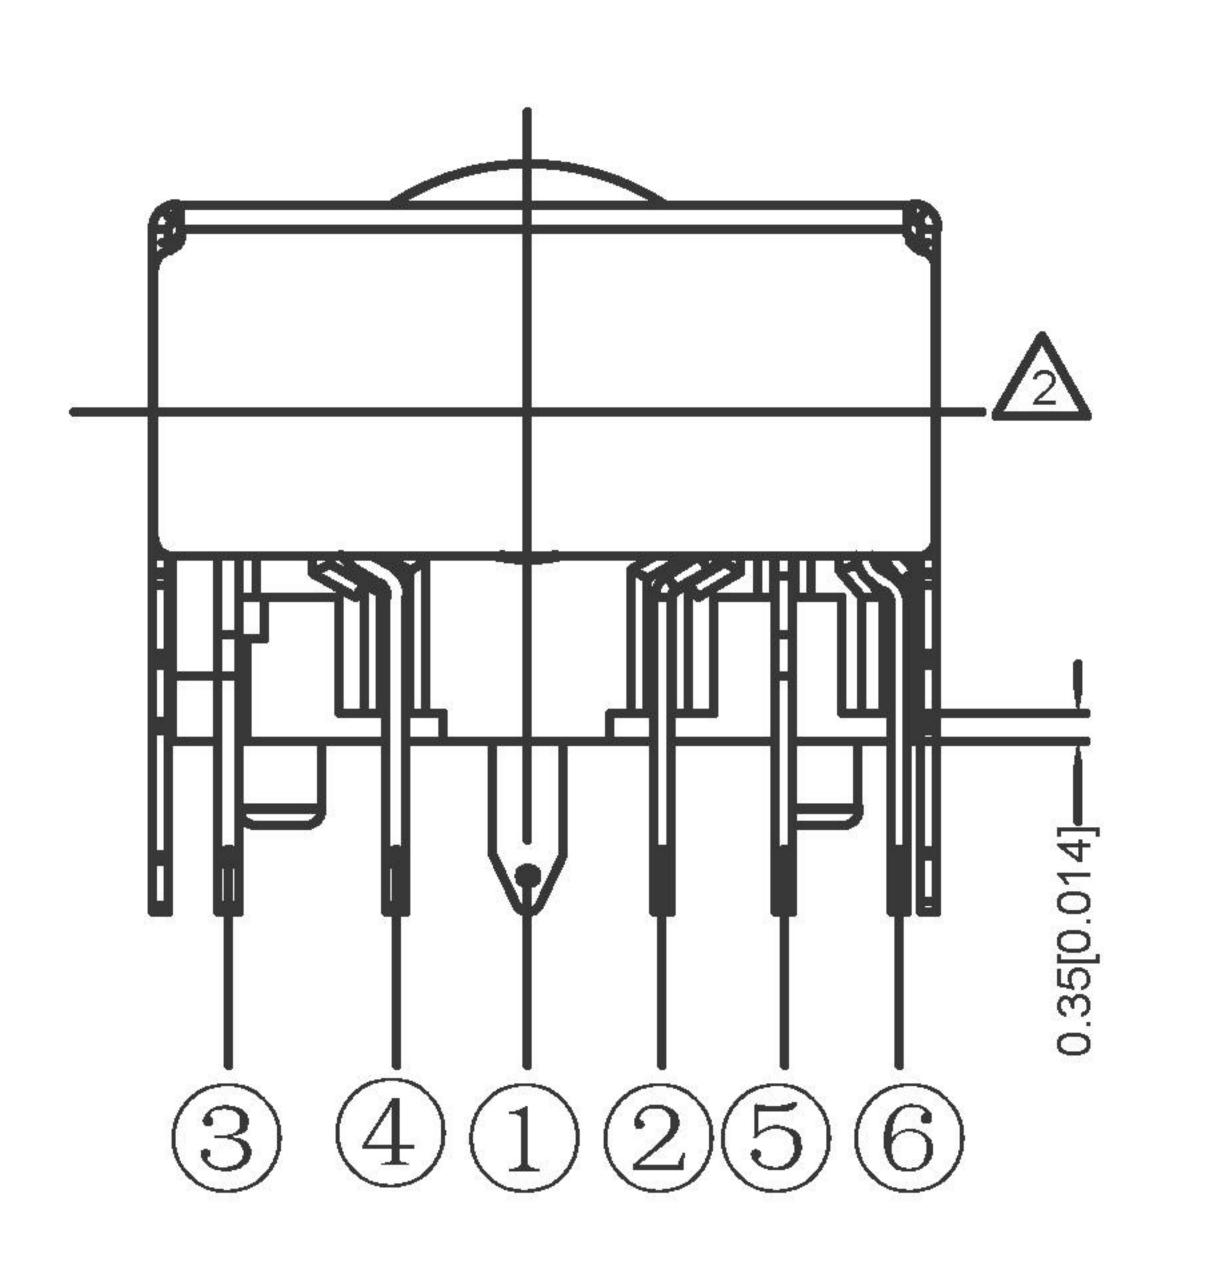

料号	Color		
PJ-3043-B	BLACK		
PJ-3043-R	Red		
PJ-3043-G	Green		

			MATERIAL	PLATING
8	SHELL	1	SUS301 0.2t	Ni60U''
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
5	SPRING PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
4	CURVE PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
3	SPRING PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
2	SPRING PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
1	CONTACT FOOT	1	COPPER ALLOY C5191	Ag15u" OVER Ni50U"

1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1										
ľ	4									
ı									ANGLAR	±5°
ı	ΔX			FE					X.X	±0.2mm
L	Δ×××								X.XX	±0.1mm
ľ	ΔΧ								X.XX	±0.05mm
ı	MARK		DESCRIPTION			DATE	REVISED	APPROVED		
			13	REVISIO	VS				UNSPECIFIED T	OLERANCES
п			WWW/W XK-	da in www.hello	kb.com www.helloxkb	cn				

DSND		DATE	SCALE: N/A	MODEL TY	PE:	
					3.5 PHOI	NE JACK
 DWN		DATE	VIEW:	PART NO.:		
CHKD		DATE	UNIT: mm/in	·		
				DWG NO.:		
APPD		DATE	SIZE: A4		PJ-	3043-X
VID	INICTOINI	WEIGHT	SHEET	REVISION		
VVD	INDUSTRIAL F	1.0a	1/1	AΩ		