
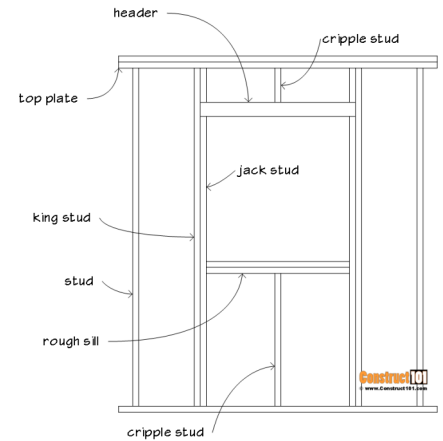
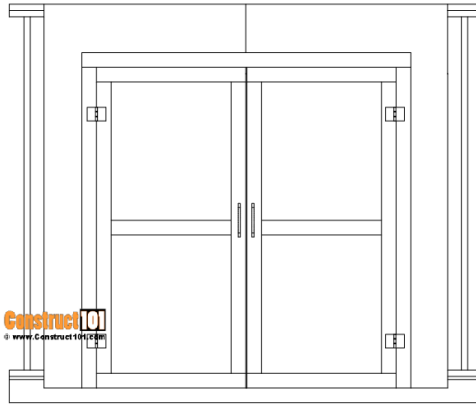


SHED DOOR and WINDOW

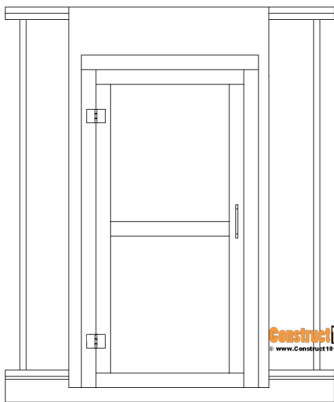

Legal:

The content of this guide may not be sold, modified, or distributed in anyway without the expressed written consent of the publisher. Reprinting, copying, or any other form of distribution for commercial or non-commercial purposes is strictly prohibited and will be prosecuted.

Disclaimer:

Every attempt has been made to provide the most accurate information as possible. However, the publisher accepts no liability for any wrong information as a result of purchasing and / or reading this guide.

You can follow this guide at your own risk the publisher accepts no responsibility for any injury to any person.

Copyright © www.Construct101.com


All rights reserved

ISBN-13:

ISBN-10:




SHED WINDOW FRAMING

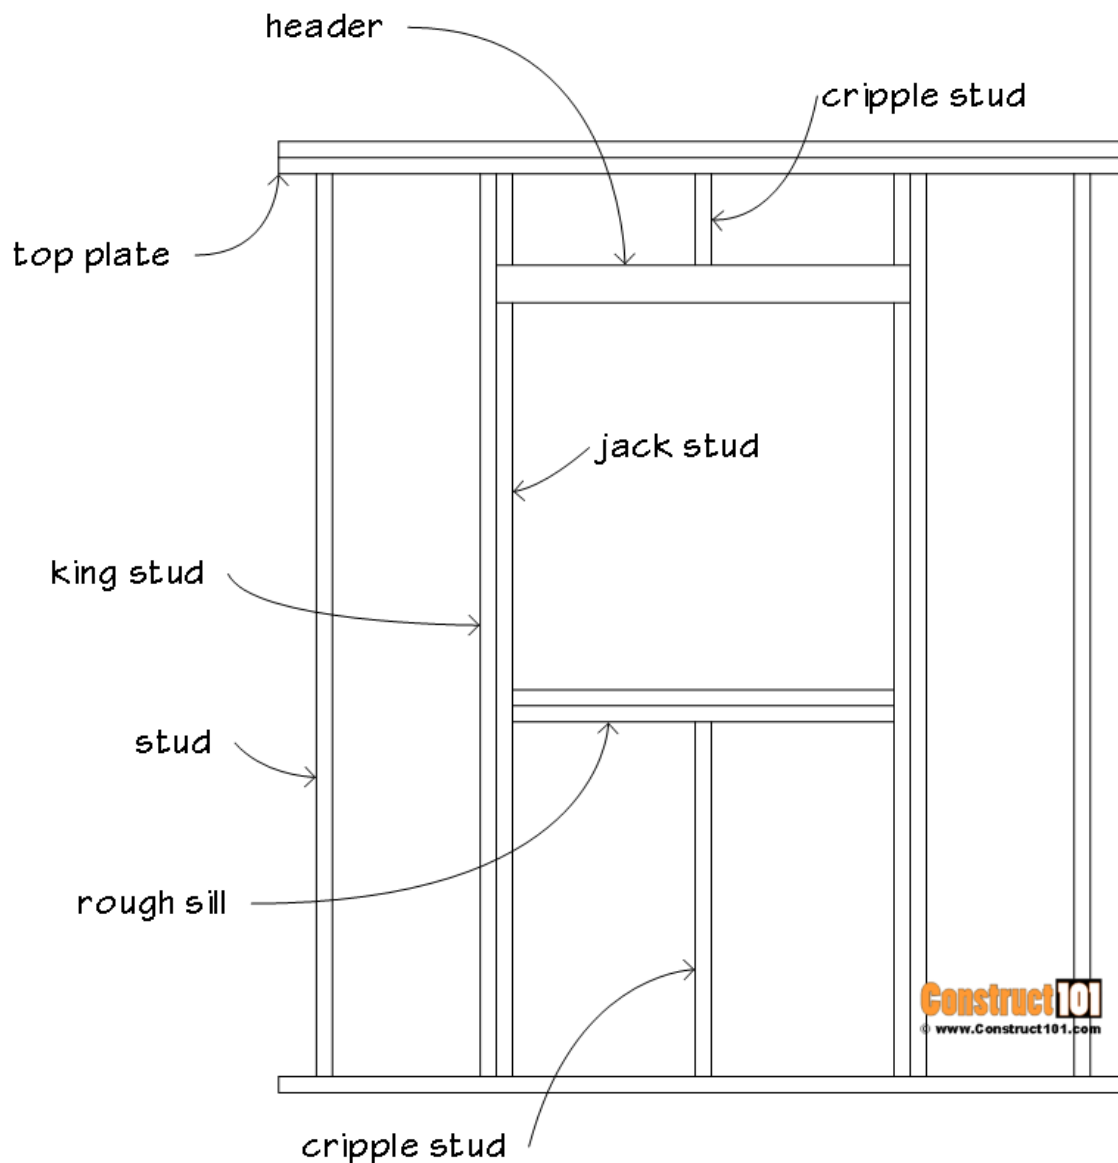


The rough opening for the window is made of king stud, jack stud, header, and cripple stud.

SHED SINGLE DOOR

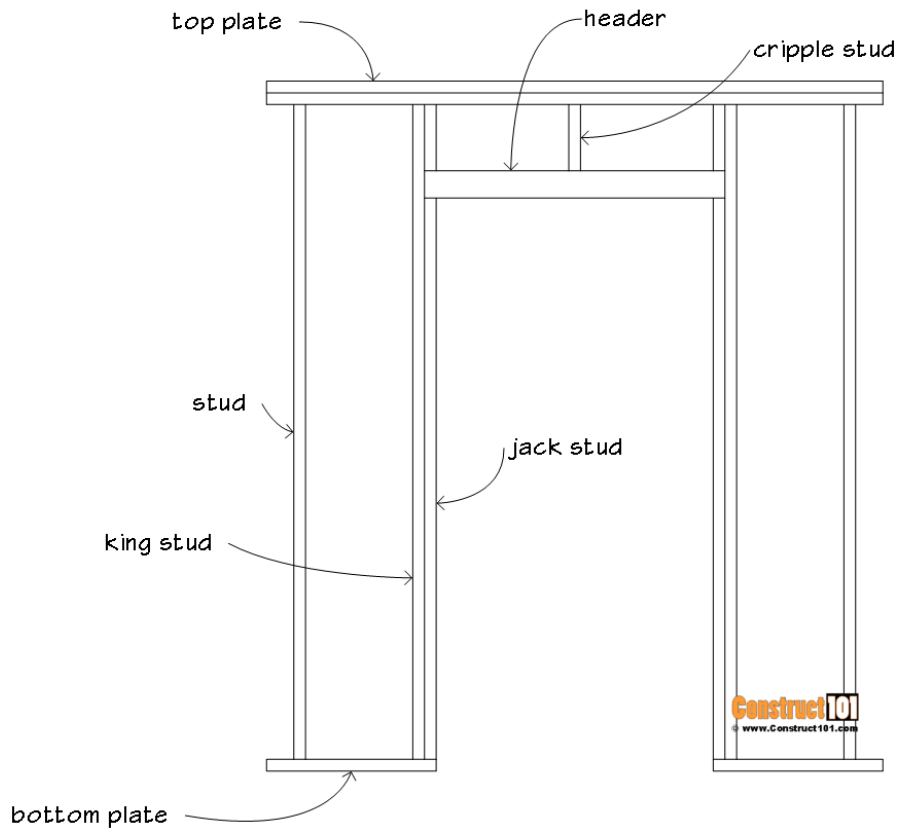

Frame the single door as shown on drawing.

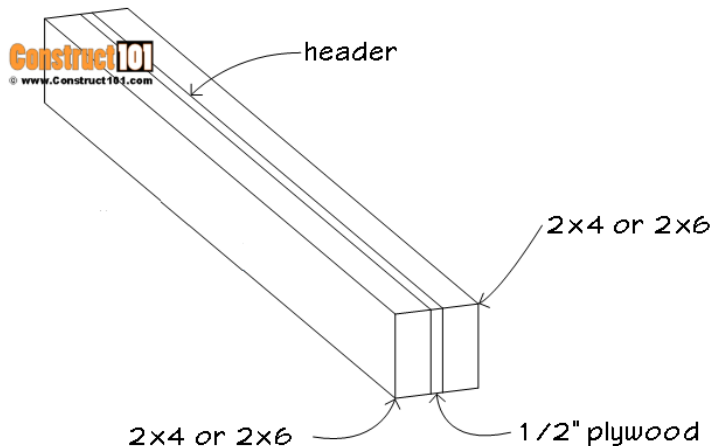


The header for the door can be built using 2x4's or 2x6's.

Cut two 2x4's or 2x6's to size.


Cut a piece of 1/2 inch plywood and install between the lumber, see drawing.

Assemble with 3- 1/2 inch nails.

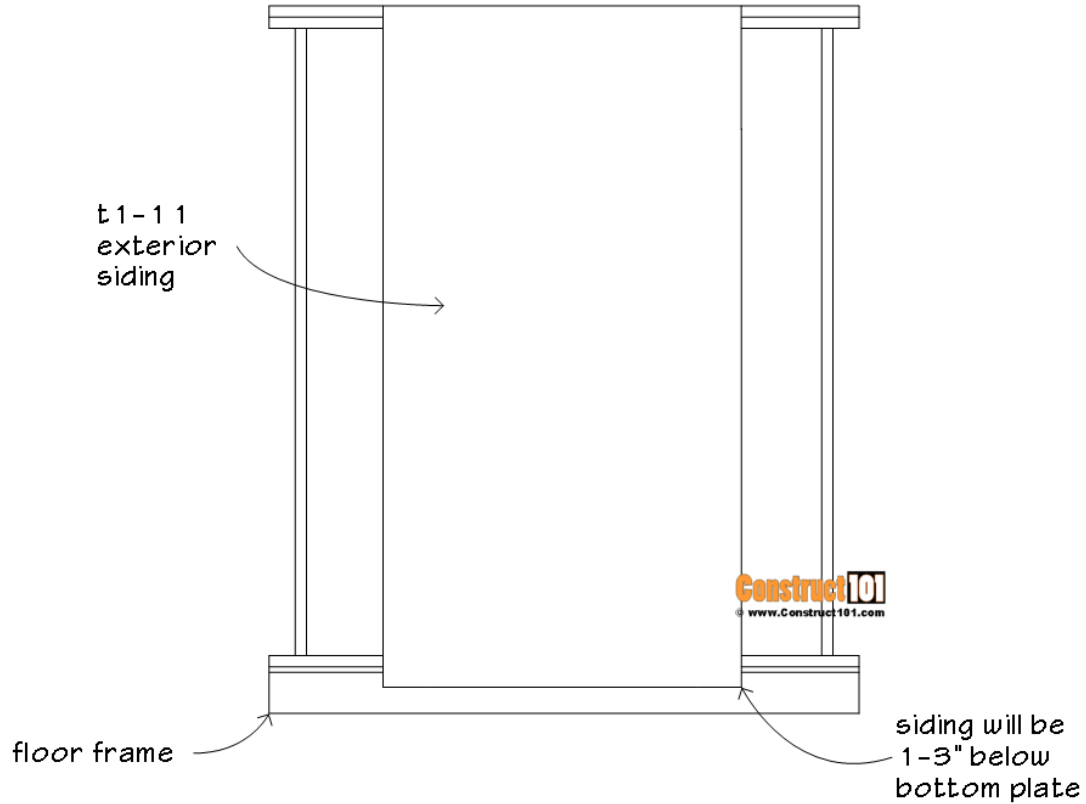


Install a t1-11 exterior siding sheet over the door opening as shown on drawing.

Secure the siding in place by nailing finishing nails through the siding and into the wall frame.

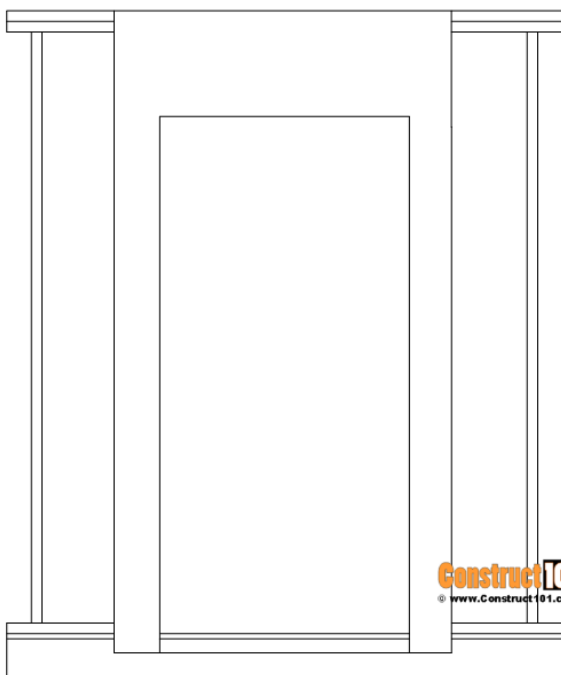


Cut out the door opening.

The door will be built using the siding that has been cut out.

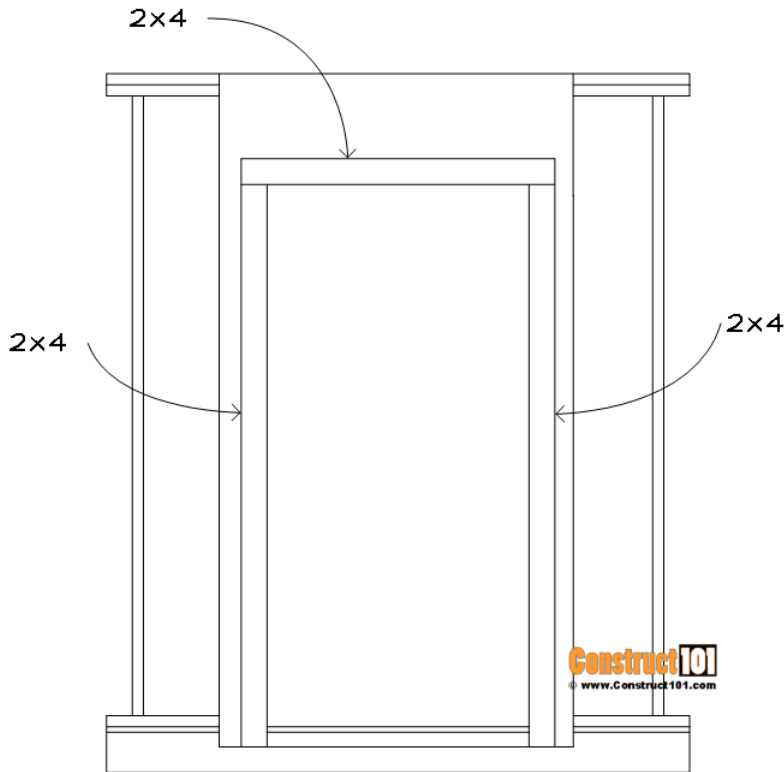

Measure and cut 2x4's to go around the door opening.

Install the 2x4 trim using finishing nails.

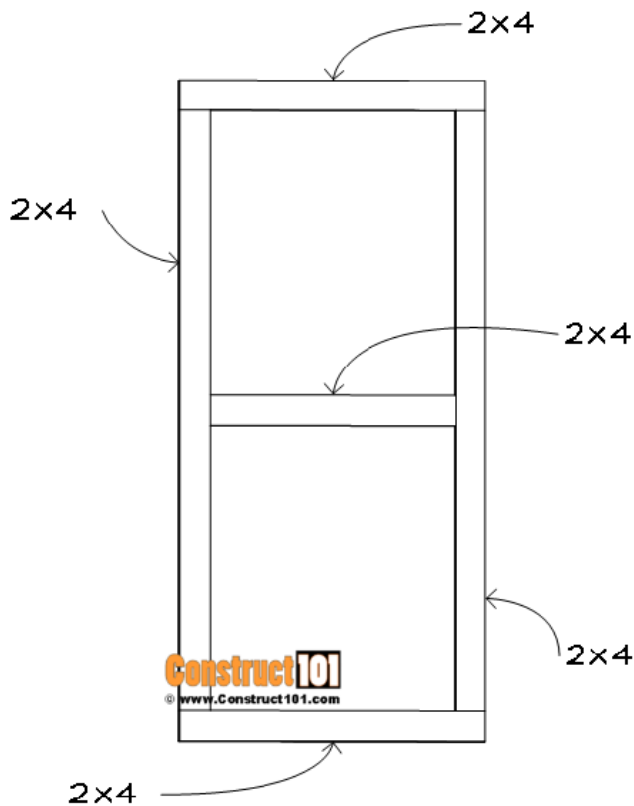


Build the shed door with the siding that was cut out earlier in the steps above.

Lay the 2x4's in a flat even surface.


Next lay the siding on top of the 2x4's.

Nail 2 inch nails through the siding and into the 2x4's.

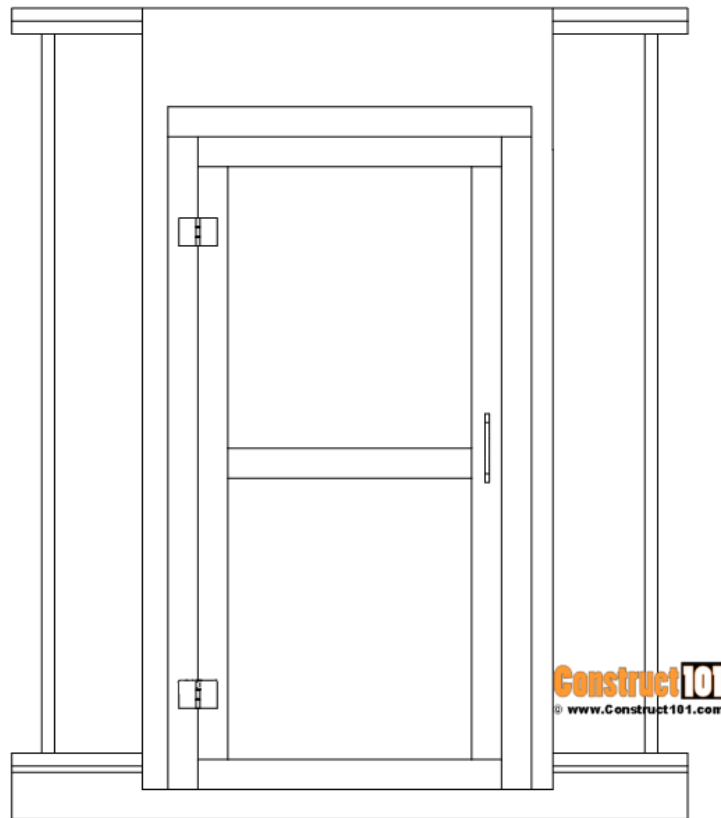


Attach the door hinges to the door and install door.

SHED DOUBLE DOOR

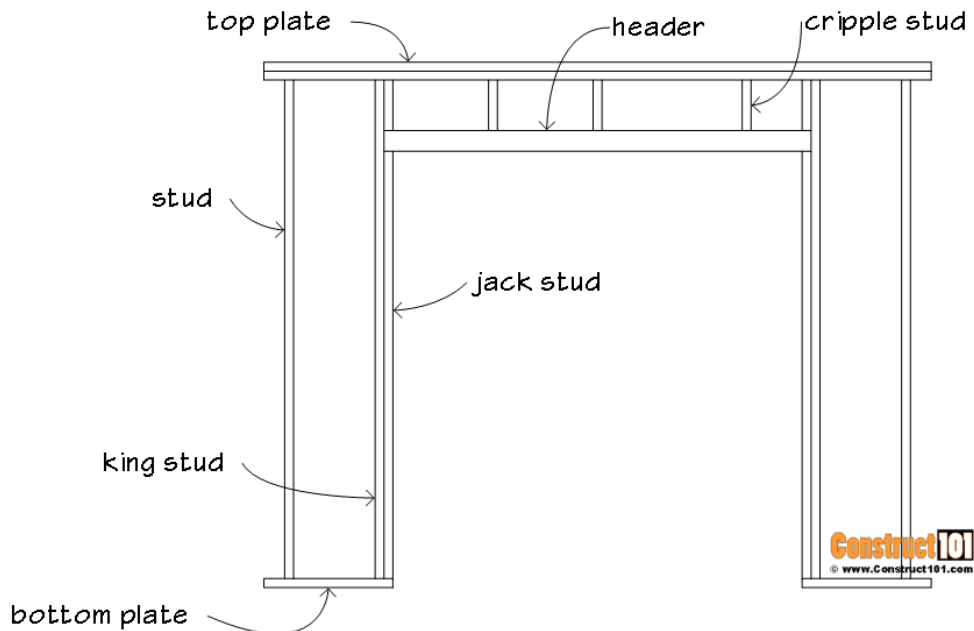

Frame the door opening as shown on drawing.

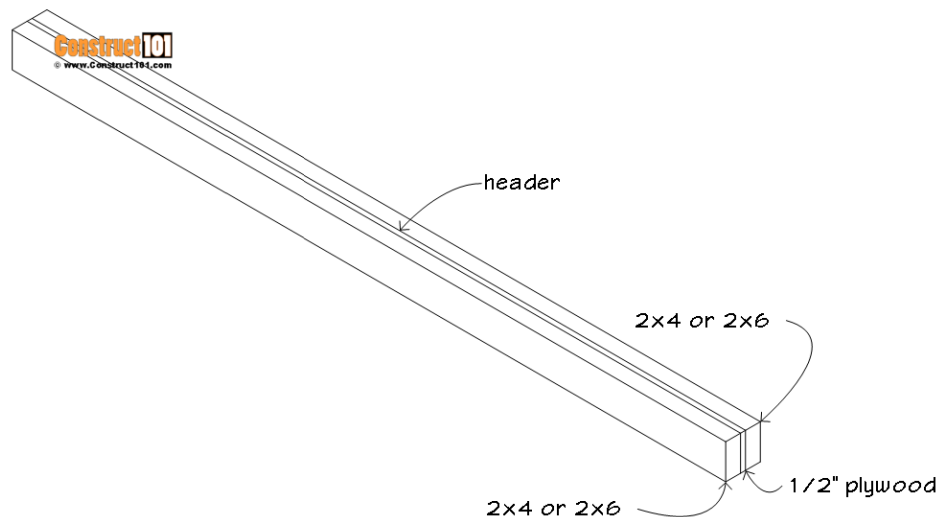


The header for the door can be built using 2x4's or 2x6's.

Cut two 2x4's or 2x6's to size.

Cut a piece of 1/2 inch plywood and install between the lumber, see drawing for details.


Assemble with 3 - 1/2 inch nails.

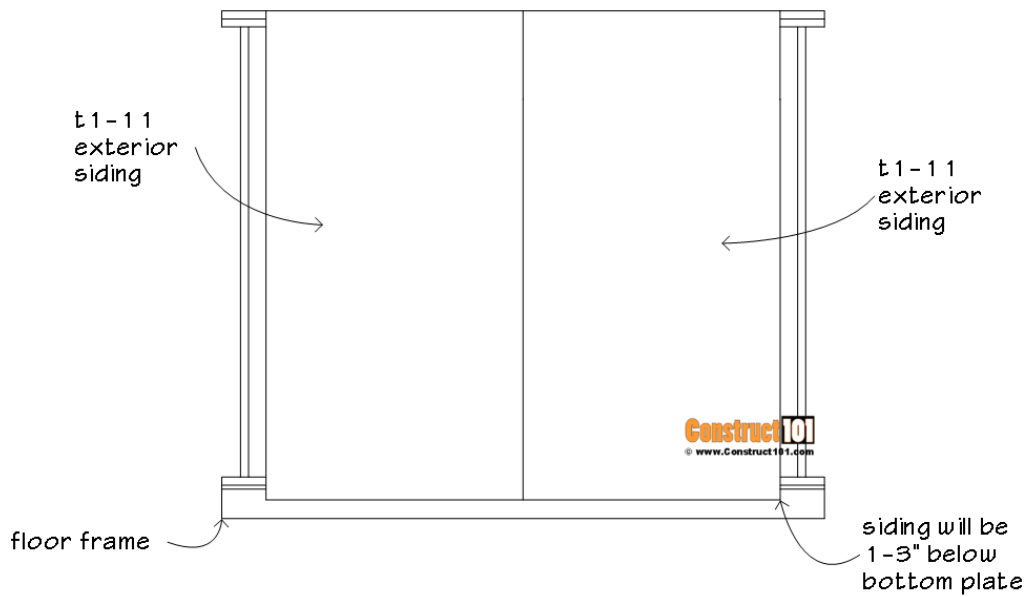

The double shed door will be built using two t1-11 exterior siding sheets.


Install a t1-11 exterior siding sheet over the door opening as shown on drawing.

Secure the siding in place by nailing finishing nails through the siding and into the wall frame.

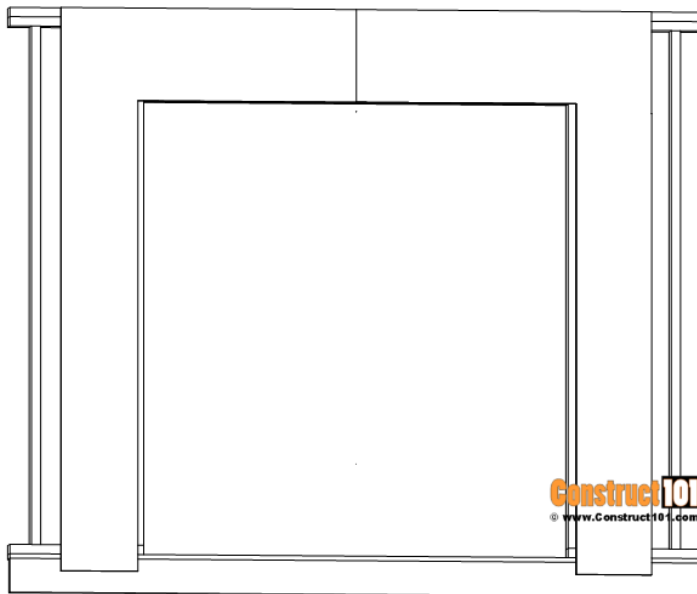


Cut out the door opening.

The door will be built using the siding that has been cut out.

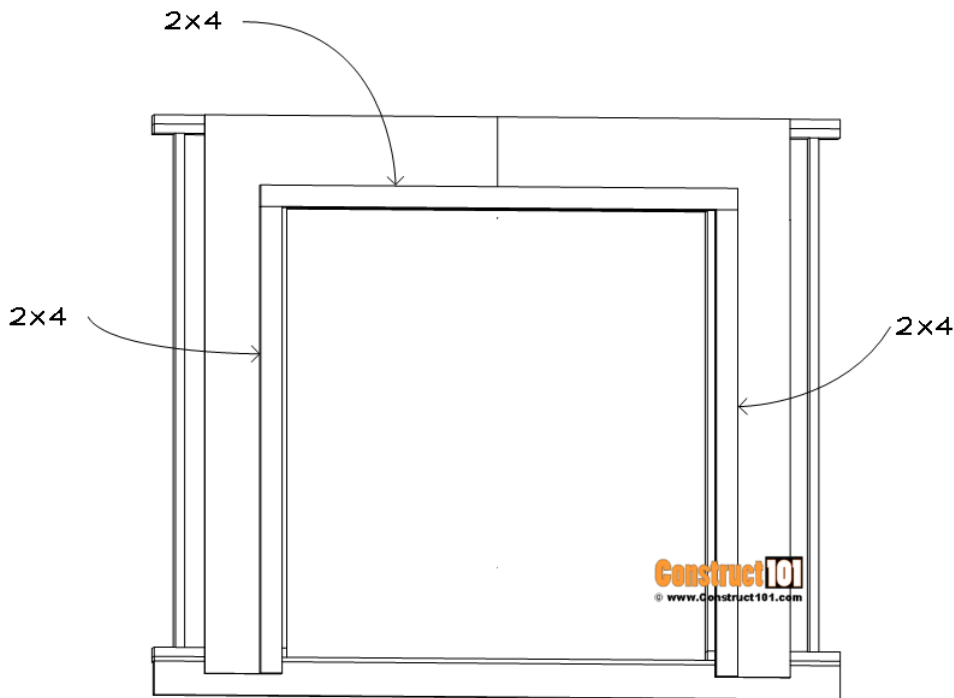

Measure and cut 2x4's to go around the door opening.

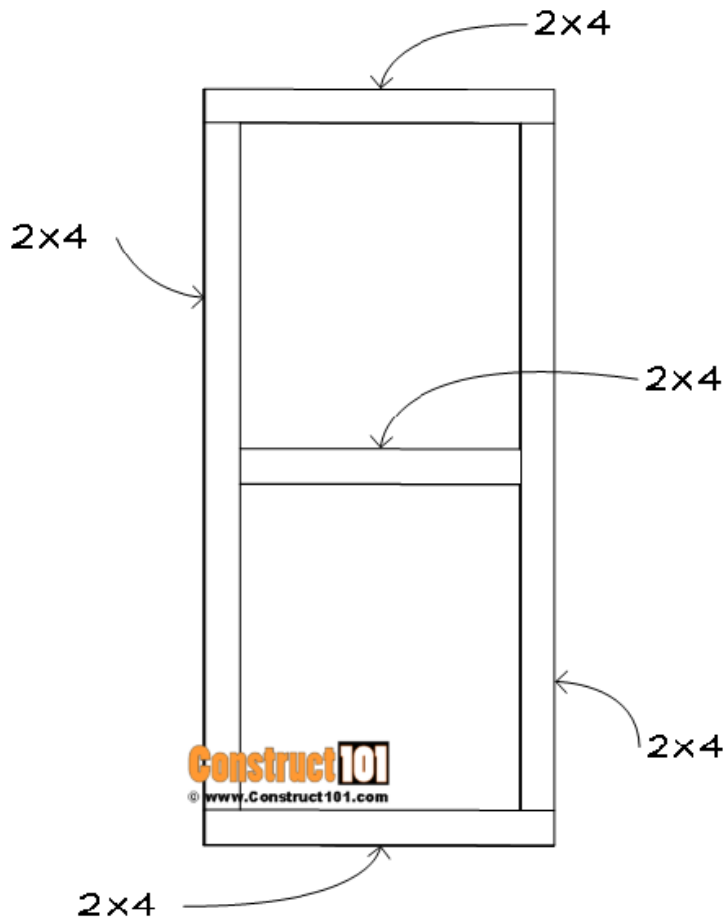


Build the shed door with the siding that was cut out earlier in the steps above.

Lay the 2x4's in a flat even surface.

Next lay the siding on top of the 2x4's.

Nail 2 inch nails through the siding and into the 2x4's.

The T 1 - 1 1 siding will have a lip that overlaps with the opposite side, leave the siding lip exposed.

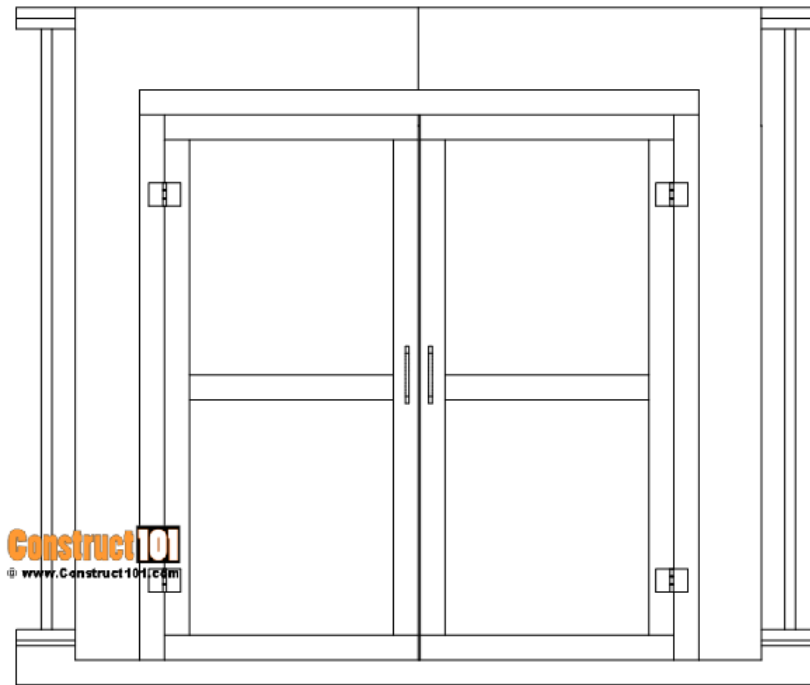

Attach the door hinges to the door and install door.

