



ADA Curb Ramp New Construction Inspection Form (End of Walk)

309th

North-South Road Name

24952.54

Project No.

Sheet No.

Intersection No.

East-West Road Name

Calibration Date

nan

(mm/dd/yy)


See https://www.oregon.gov/odot/Engineering/Documents_RoadwayEng/ADA_ExhibitA.pdf for more corner styles.
Use Washington County corner numbering system.

EW

Ramp Style

Use the End of Walk style inspection form where sidewalk ends at locations that are not intersections. Turning Space may be measured at either the top or bottom of the ramp run.

See also *Standard Drawings* to assess provisions not shown: (inlets, alignment, etc.)

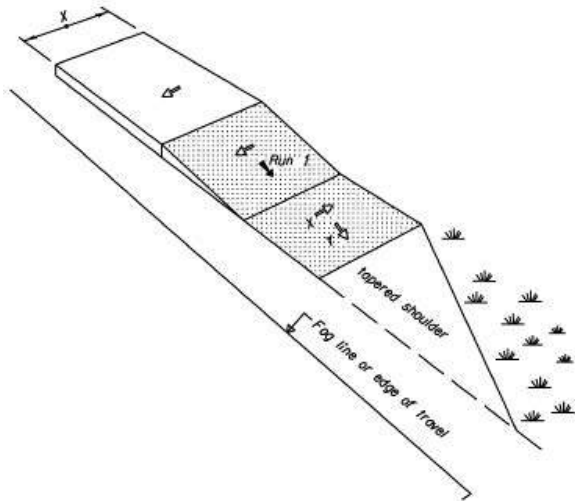

- Pedestrian access route (To measure clear width)
- Cross slope (design to 1.5% max. to achieve 2.0% finish grade)
- Running slope (design to 7.5% max to achieve 8.3% finish grade)
- Level area (X & Y) (design to 1.5% max to achieve 2.0% finish grade / 4' x 4' min.)

RAMP RUN 1

Pass

Fail

Running Slope 1 ≤ 8.3% ☒ > 8.3% ☐

Length 1

Cross Slope 1 ≤ 2.0% ☒ > 2.0% ☐

Detectable Warning (Y/N) Y ☐ N ☐

Lip Height 1/4" ☒ > 1/4" ☐

Location of Landing in Relation to Ramp (top or bottom)

Transition Type (tapered or cont.)

Change of Direction at End of Walk (Y/N)

End of Walk Barricade Posted (Y/N)

TURN SPACE/LANDING ☐ NEITHER ☐ Pass Fail

Width X ≥ 4.0' ☒ < 4.0' ☐

Length Y ≥ 4.0' ☒ < 4.0' ☐

Slope X ≤ 2.0% ☒ > 2.0% ☐

Slope Y ≤ 2.0% ☒ > 2.0% ☐

MISCELLANEOUS Traversable Pass Fail

Flare Slope 1 ☒ ≤ 10% ☒ > 10% ☐

Flare Slope 2 ☒ ≤ 10% ☒ > 10% ☐


Clear Width (feet) ≥ 4.0' ☐ < 4.0' ☐

Slope of the Road

Horizontal Gaps ≤ 1/2" ☐ > 1/2" ☐

midblock

Corner Position

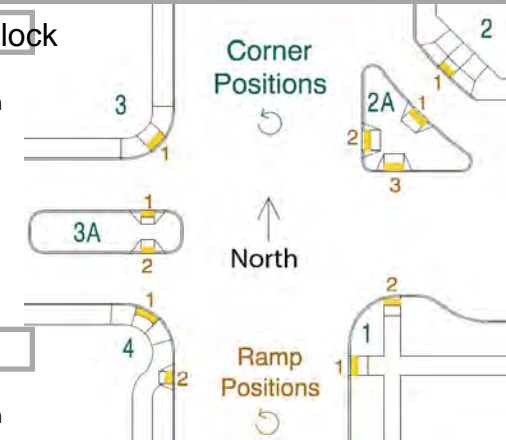

Ramp Position

PE Stamp (required for private development)

Comments:

Inspector's Signature

Date

Darrell Wyant

52638.0

Print name clearly

Certification No.

3J Consulting

Company/Agency

Reset Entire Form

Keep Intersection, Reset Fields

ADA Curb Ramp Images

Attached photos must be in .pdf format in order to be placed

