


1 C	05-0033	REV	A
REV.	DATE	ALTERATION	
A	3-25-05	INITIAL RELEASE	

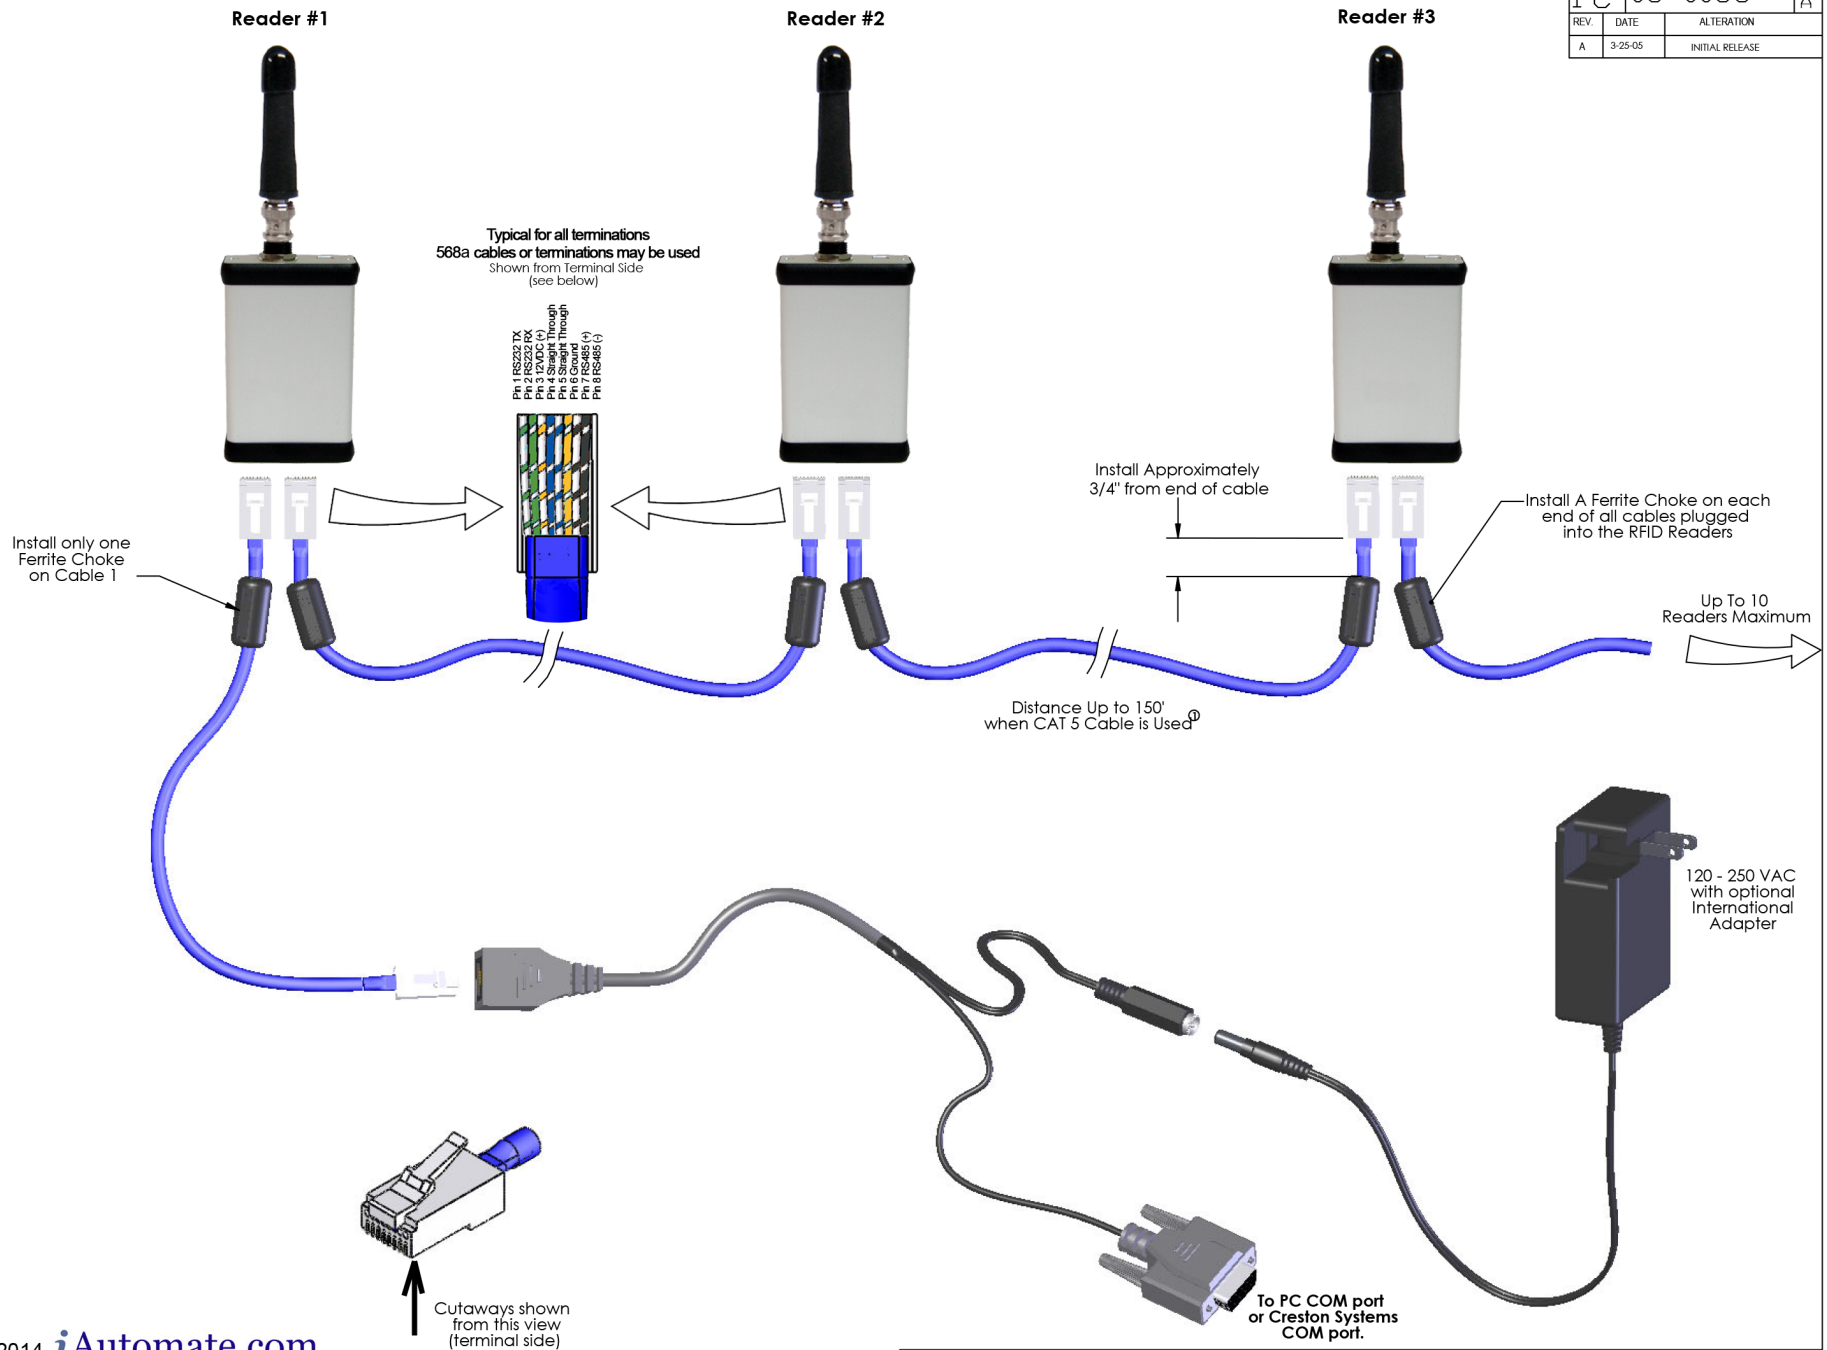

©2014 **iAutomate.com**

This document may be distributed or reproduced in whole or in part so long as the iAutomate.com logo is clearly visible on all copies.

Notes:

1. Distance can be increased up to 2000' with heavier gage cable.

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRWN: APW 10/14	DATE: 10/14	MAT'L:	MACHINE NAME:	RX210 RFID Readers		
DECIMALS	BREAK ALL SHARP EDGES .010	DRWD: PCM 10/14	DATE: 10/14		PART NAME:	Readernet Wiring Using 568a Terminations		
(2) PLACES .00 +/- .010		ASSY USED ON:		PROCESS FINISH:		iAutomate.com		
(3) PLACES .000 +/- .005	FINISH 12V	PROJECT CODE:				Alpharetta, GA 888-949-1388		
ORIGINAL DWG.	SCALE:					1 C	05-0033	REV A