



For printf() output

UART1 TX WRT CPU RB7 MOSI
 UART1 RX WRT CPU RB8 MISO

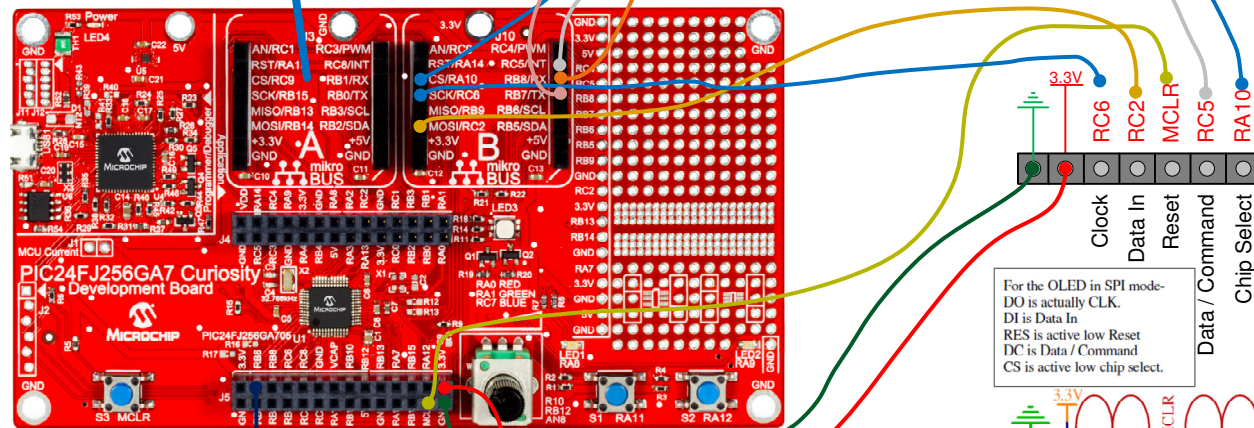

For the OLED in SPI mode:
 DO is actually CLK.
 DI is Data In
 RES is active low Reset
 DC is Data / Command
 CS is active low chip select.

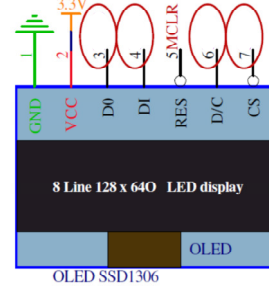

Cut off my PROTEL circuit for my Arduino format board.

