
DETERMINAREA TEMPERATURII CORPURILOR PE BAZA LEGII LUI PLANCK

Just to remember what I will be talking about, I will add an image of the device.

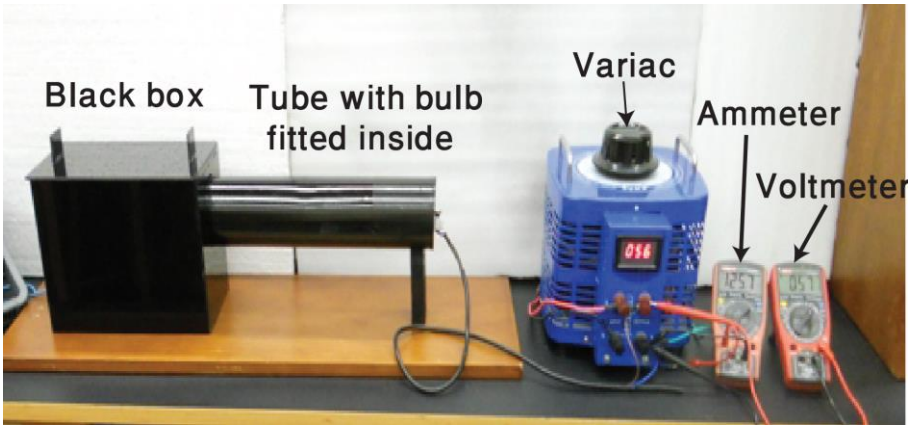


1. You will need to put the bulb's voltage on 60V.
2. Position the pyrometer so that the filament lamp overlaps the image of the filament of the light bulb.
3. Rotate the indictor until the filament shine is the same.
4. In this case, read the current indicated by the pyrometer milliampere meter.
5. Read the voltage and current applied to the bulb.
6. Change the voltage applied to the bulb in (60 - 140 V) range.

// Explaining the table.

7. We at the laboratory do 2-3 person per device, so in the current source you will have minimum 2 values. I have no idea how should we put these in the colocviu. Anyway,
8. After you get these values, you need to get the average.
9. You will represent on a graph i(mA)(the average i) and ts, which is in the “indrumar”, and from that graph you can get the values of the actual ts.
10. Change ts(Celsius) to Kelvin(ts+273.15)
11. Get the real T, from a formula that is given.
    Note: change the lambda(micrometer) to meter (x 1e^-6)
12. Represent a graph its input R and real T. From that graph you will pick any 2 points randomly and use the formulas to get Alpha and Beta.

- I am not sure about my last graph (R and real T).