



HMI For Prosthetic Limb

4IER


Shareholders: Atakan Amuk, Burak Demir, Emin Özberk Akkan,
Erhan Durmaz, Mehmet Baştürk, Yusuf Berat Bölükbaş



Project Description

Developed by senior METU Electrical and Electronics Engineering students in team 4IER, this advanced HMI project controls a robotic arm using human muscle signals. The system integrates biosignal data acquisition with intelligent control mechanisms. By leveraging deep neural networks to decode real-time EMG patterns, it allows the robotic arm to operate safely and with extreme precision even in the most sensitive and confined spaces.


System Design

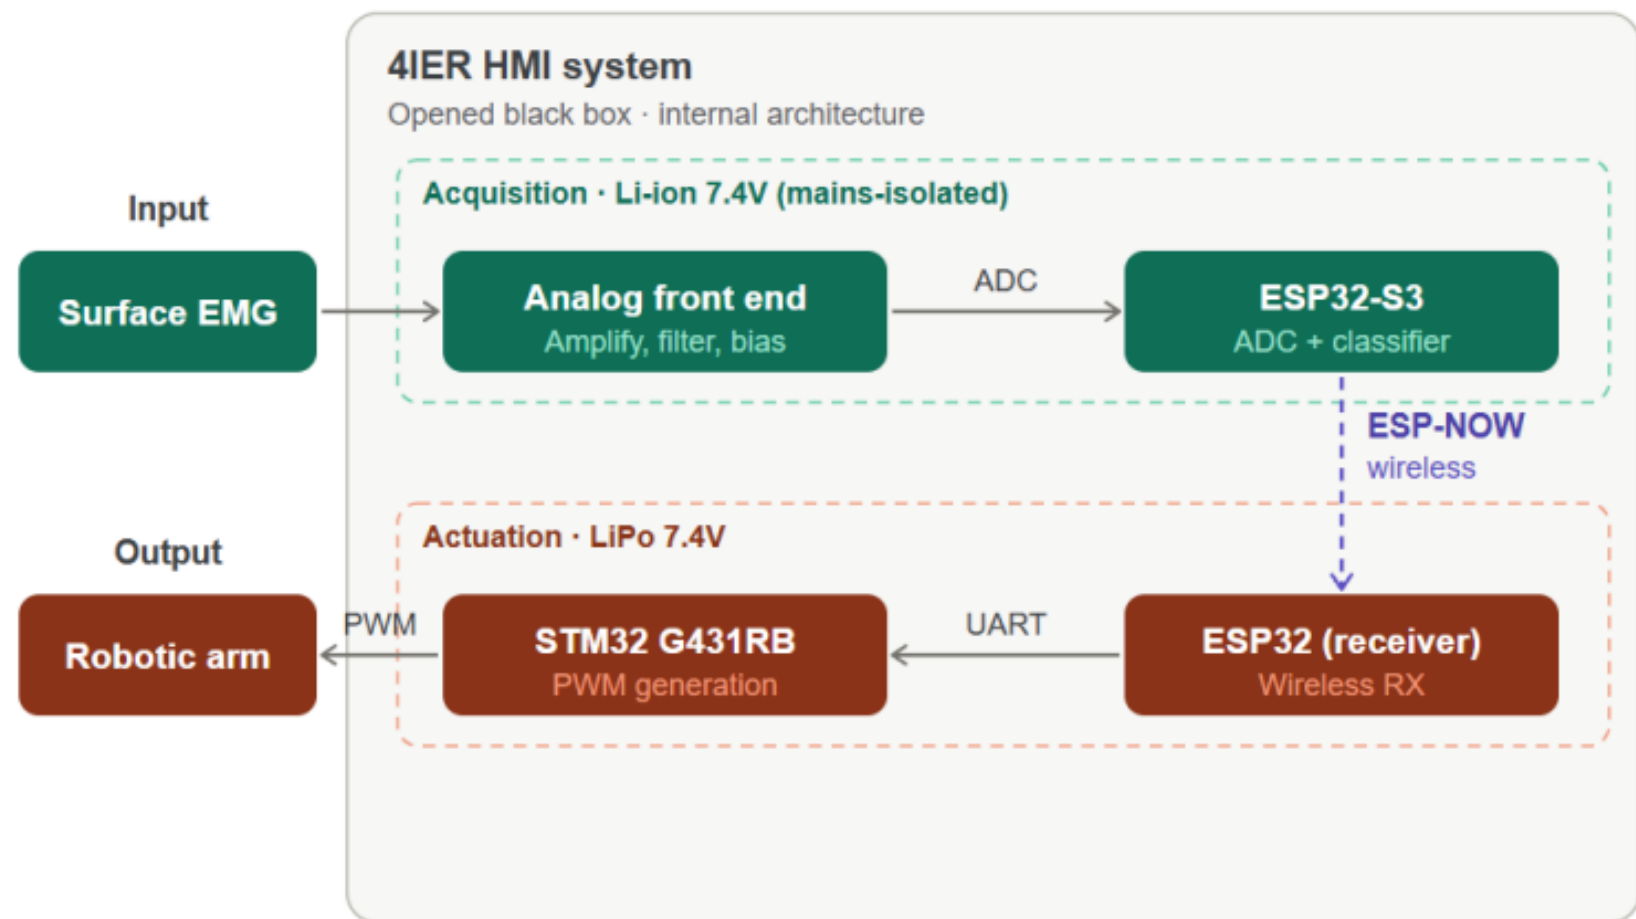

Requirements & Compliance

Requirement & Description	Required	Measured	Status
Total End-to-End Delay: Total system latency bounded for responsive control.	0 – 200 ms	180 ms	Success
Classification Accuracy: System operational accuracy target spans the 0 – 100% range.	0 – 100 %	98.65 %	Success
Leakage Current: Max allowable leakage capped to ensure strict patient safety.	< 10 μ A	5 μ A	Success
Power Consumption: Overall operational current draw constraint of the system.	0–10A	2A	Success
Isolation: Fully battery-powered floating node operation.	Battery-Powered	Battery-Powered	Success

Full System Overview

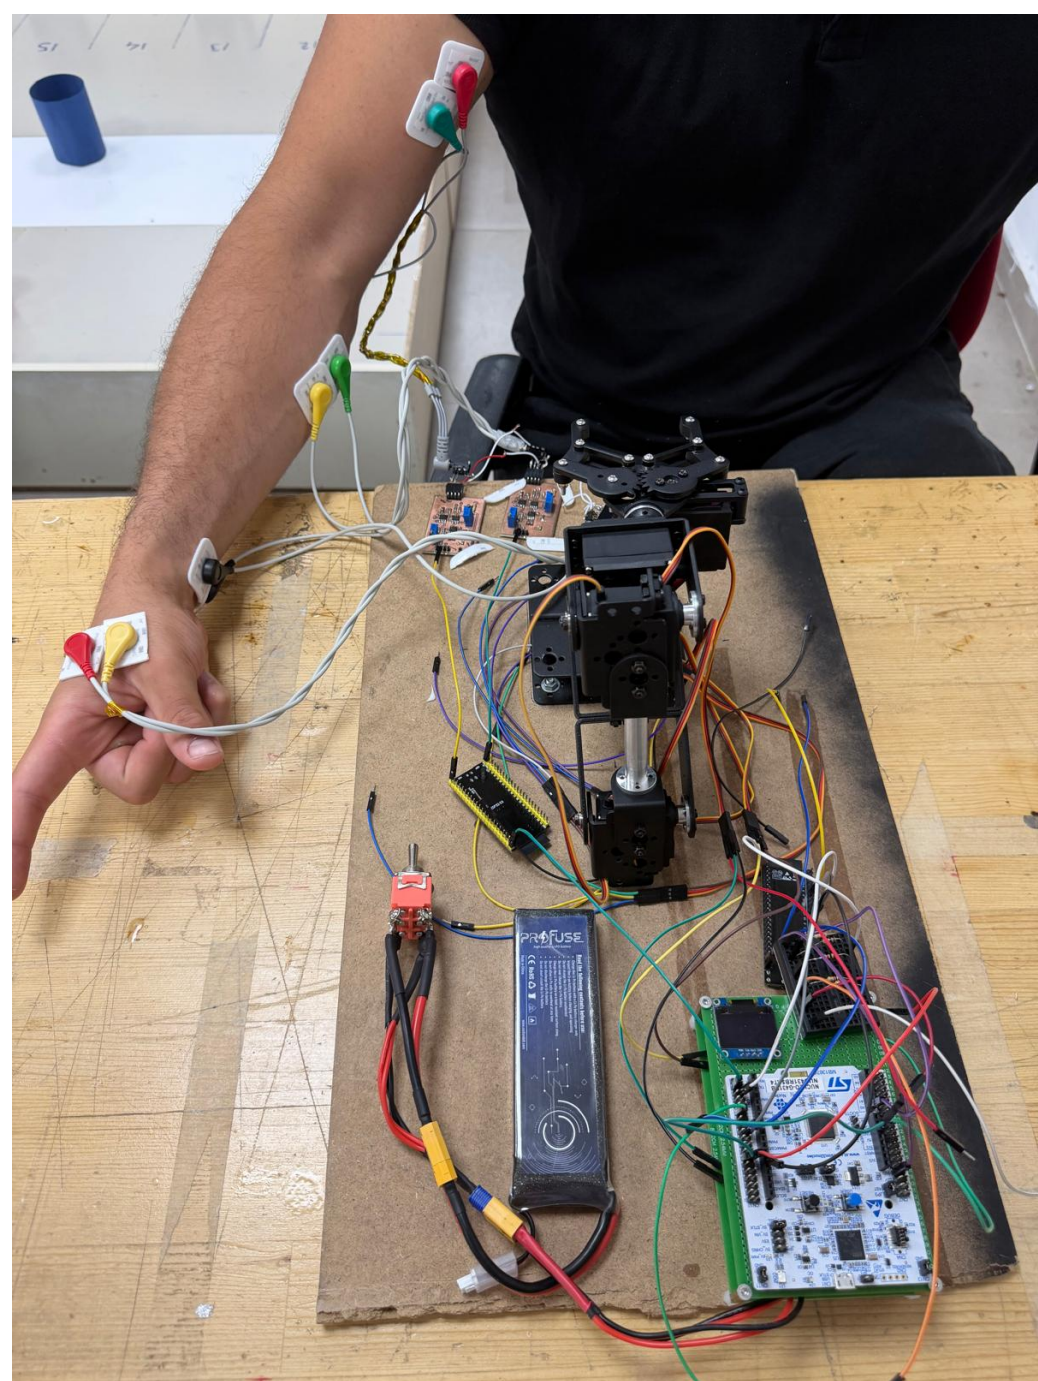

Deliverables

- Universal EMG Acquisition & Classification
- 3D-Printed Robotic Arm System
- End-to-End HMI Control System

Features

- Wireless Communication:** Seamless and ultra-fast data link between the control system and the prosthetic arm using ESP-NOW.
- Autonomous Edge Computing:** Executes all DSP and classification tasks directly on-device, completely eliminating the need for an external PC.
- Decoupled Architecture:** Distinct physical separation between the bio-signal acquisition and actuation stages for maximum patient safety.
- Real-Time Actuation:** Hardware-level PWM generation via STM32 ensures highly precise and smooth robotic movements.
- Scalable Sensor Interface:** Expandable analog front-end architecture, ready to accommodate additional signal channels for more complex gesture recognition.

Test Results & Performance

Parameter	Value	Actual Performance	Expected Performance	Error
Wireless Latency	8.5 ms		< 50 ms	-
Classification Accuracy	96%		> 90%	-
Power Consumption	17W		< 33W	-
Total Delay	180 ms		< 200 ms	-
Leakage Current	5.5 μ A		< 10 μ A	-
Grasping, Carrying, Positioning and Releasing Test	95% for grasping and carrying 80% for positioning and releasing		> 90% accuracy	15% for positioning and releasing

Cost Breakdown

Component	Qty	Price
ESP32-S3 DevKit	1	\$15.00
ESP32 Receiver	1	\$10.00
STM32G431KB	1	\$12.00
sEMG Sensors	3	\$60.00
SG90 Servos	4	\$16.00
Li-Po Battery	2	\$20.00
Other (PCB, wires)	–	\$29.00
Grand Total		\$162.00