



US011931899B2

(12) **United States Patent**  
**Hall**(10) **Patent No.:** US 11,931,899 B2  
(45) **Date of Patent:** \*Mar. 19, 2024(54) **AUTOMATION WINDOWS FOR ROBOTIC PROCESS AUTOMATION**(71) Applicant: **UiPath, Inc.**, New York, NY (US)(72) Inventor: **Andrew Hall**, Bellevue, WA (US)(73) Assignee: **UiPath, Inc.**, New York, NY (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/697,871**(22) Filed: **Mar. 17, 2022**(65) **Prior Publication Data**

US 2022/0203530 A1 Jun. 30, 2022

**Related U.S. Application Data**

(63) Continuation of application No. 16/989,003, filed on Aug. 10, 2020, now Pat. No. 11,325,254, which is a (Continued)

(51) **Int. Cl.****G06F 3/00** (2006.01)  
**B25J 9/16** (2006.01)  
**G06F 9/54** (2006.01)(52) **U.S. Cl.**CPC ..... **B25J 9/1661** (2013.01); **G06F 9/54** (2013.01); **G06F 9/542** (2013.01); **G05B 2219/31124** (2013.01); **G05B 2219/50391** (2013.01)(58) **Field of Classification Search**

CPC ..... G06F 9/54

(Continued)

## (56)

**References Cited**

## U.S. PATENT DOCUMENTS

7,013,465 B1 3/2006 Taylor et al.  
7,080,385 B1 7/2006 Collison et al.  
(Continued)

## FOREIGN PATENT DOCUMENTS

CN 102473106 B 4/2015  
CN 107666987 A 2/2018  
(Continued)


## OTHER PUBLICATIONS

Meyer A. Billmers, Mini-Robot Group User's Guide. (Year: 1974).\*  
(Continued)

Primary Examiner — Lechi Truong

(74) Attorney, Agent, or Firm — LeonardPatel PC;  
Michael A. Leonard, II; Sheetal S. Patel(57) **ABSTRACT**

Automation windows for RPA for attended or unattended robots are disclosed. A child session is created and hosted as a window including the UIs of applications of a window associated with a parent session. Running multiple sessions allows a robot to operate in this child session while the user interacts with the parent session. The user may thus be able to interact with applications that the robot is not using or the user and the robot may be able to interact with the same application if that application is capable of this functionality. The user and the robot are both interacting with the same application instances and file system. Changes made via the robot and the user in an application will be made as if a single user made them, rather than having the user and the robot each work with separate versions of the applications and file systems.

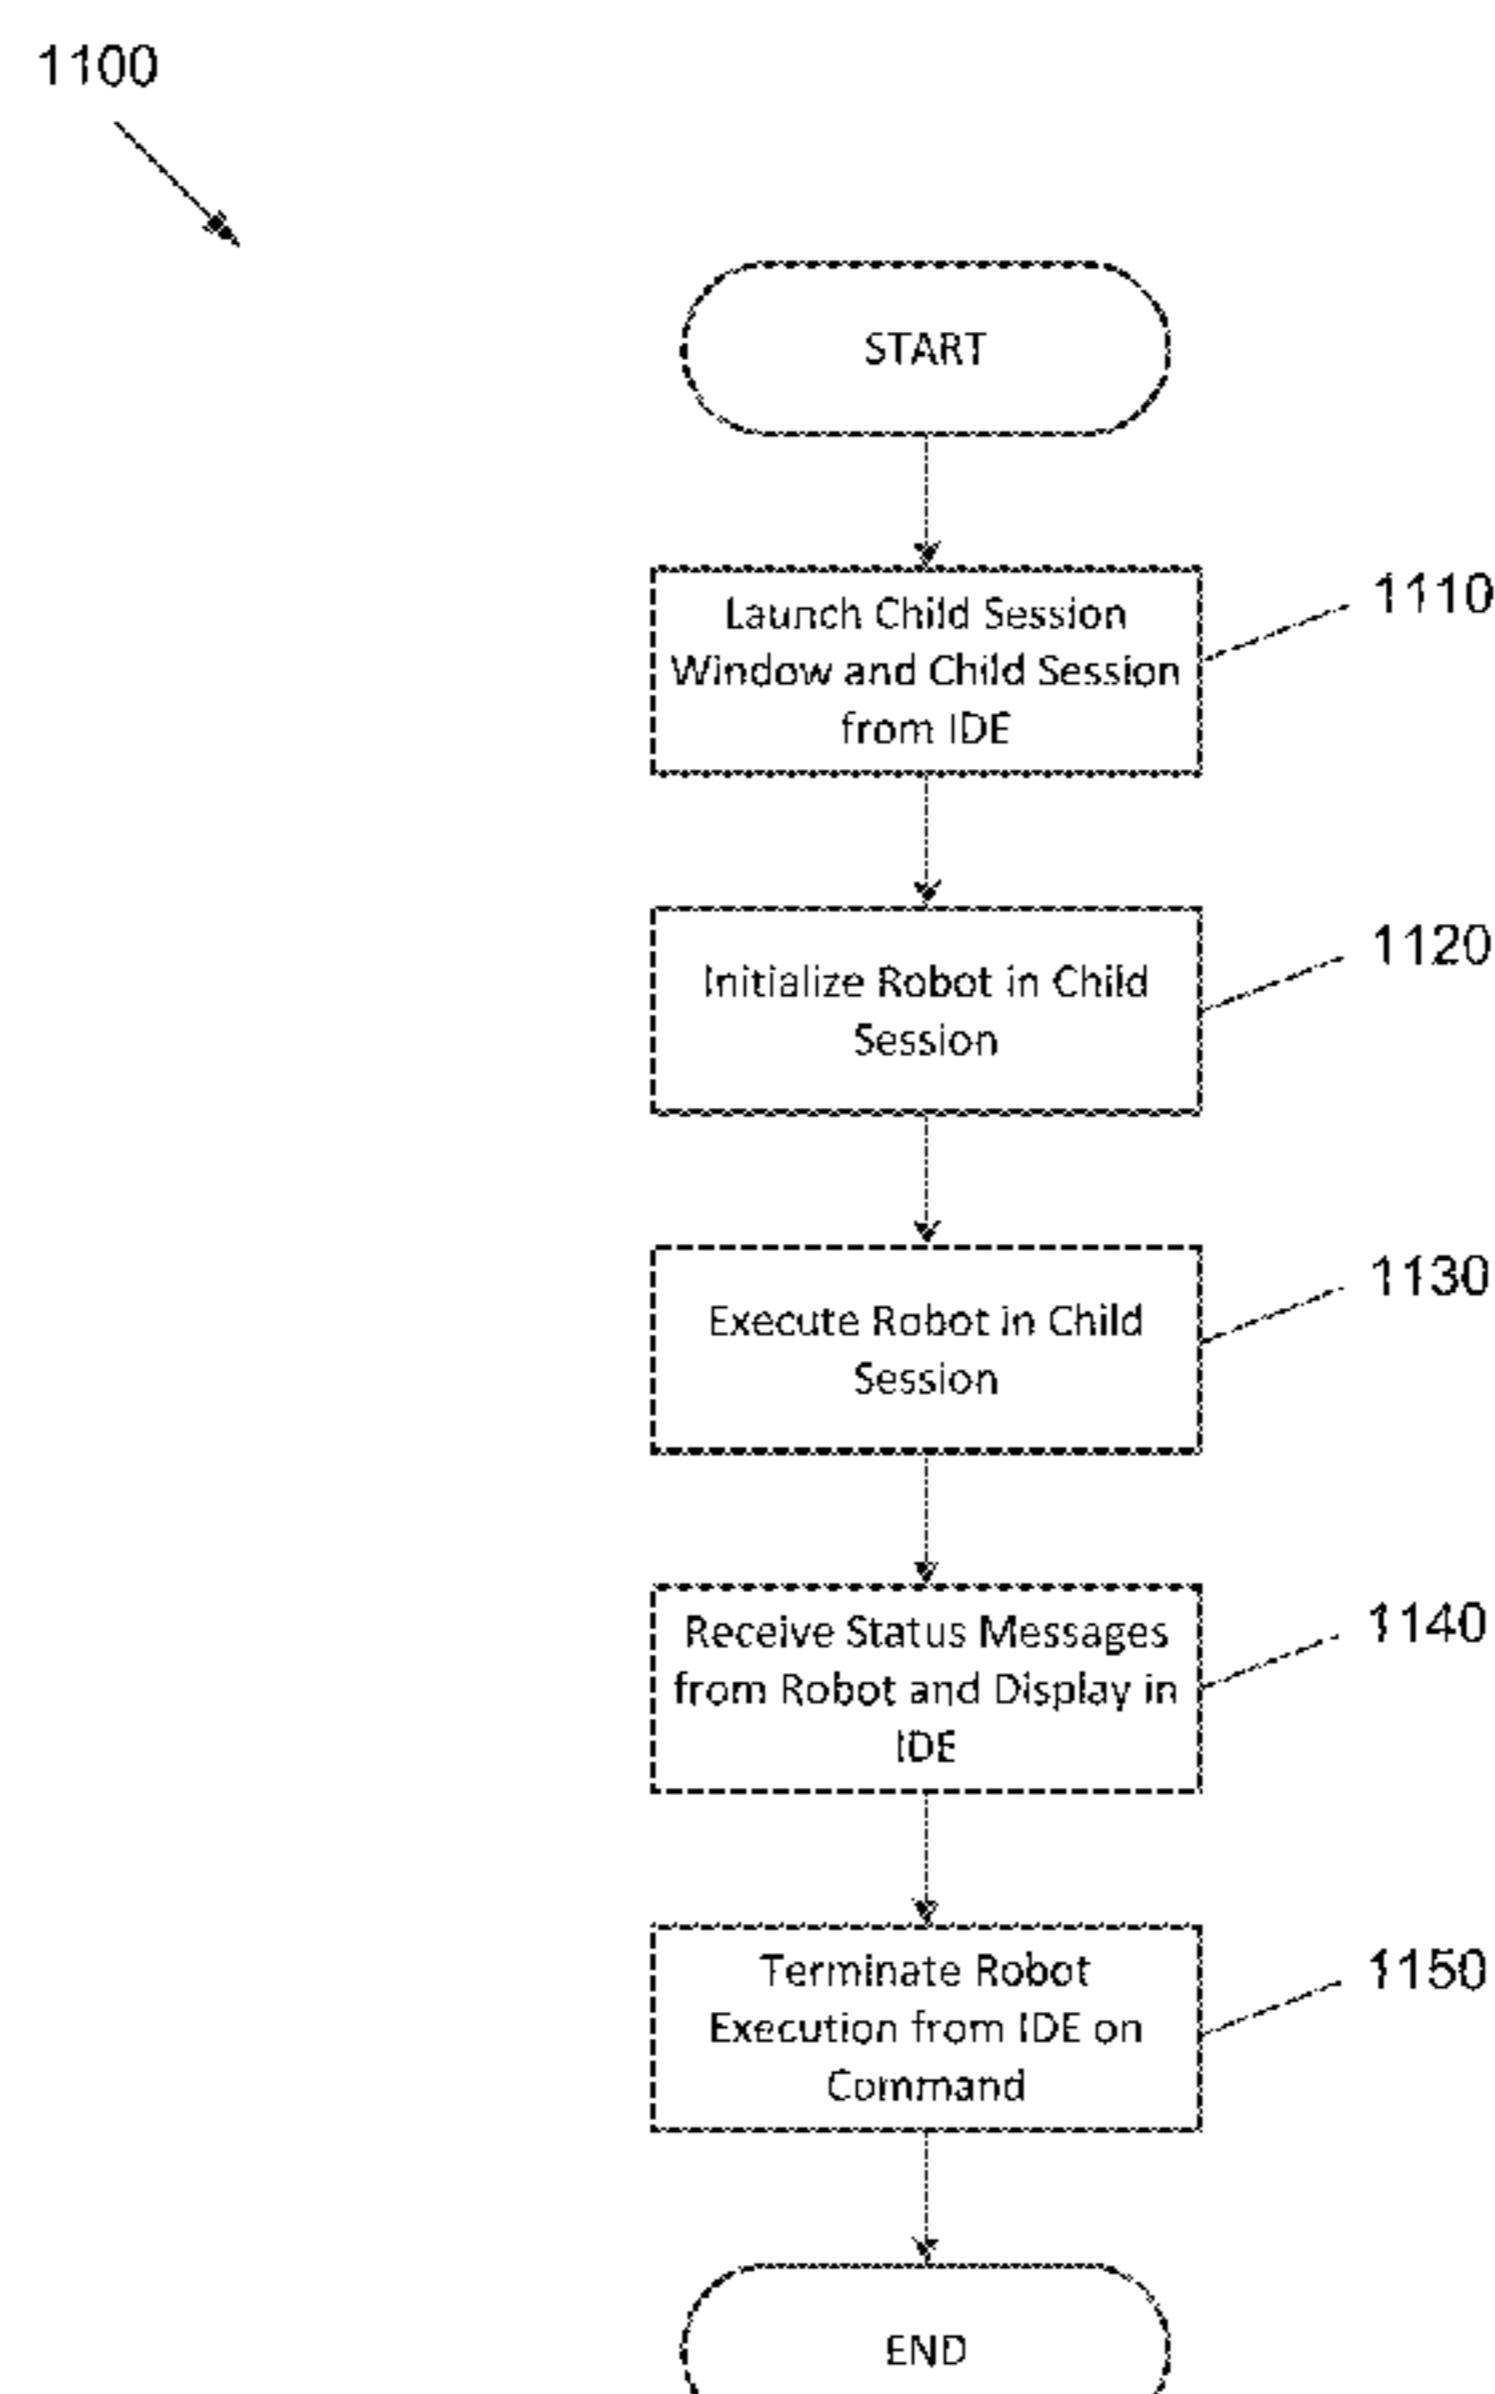**15 Claims, 22 Drawing Sheets**

**Related U.S. Application Data**

continuation of application No. 16/793,064, filed on Feb. 18, 2020, now Pat. No. 10,654,166.

**(58) Field of Classification Search**

USPC ..... 719/310  
See application file for complete search history.

(56)

**References Cited**

## U.S. PATENT DOCUMENTS

7,478,402	B2	1/2009	Christensen et al.
7,899,915	B2	3/2011	Reisman
8,402,431	B2	3/2013	DeBoer et al.
9,552,056	B1	1/2017	Barry et al.
10,324,457	B2	6/2019	Neelakandan et al.
10,339,027	B2	7/2019	Garcia et al.
10,503,627	B2	12/2019	Radhakrishnan et al.
10,572,316	B2	2/2020	Carteri et al.
10,654,166	B1	5/2020	Hall
10,802,889	B1 *	10/2020	Ganesan ..... G06F 9/5005
10,860,905	B1	12/2020	Gligan et al.
10,911,546	B1	2/2021	Goswami et al.
11,130,233	B2	9/2021	Hall
11,157,339	B1	10/2021	Dines
11,171,989	B1 *	11/2021	Kim ..... H04L 63/18
11,233,861	B2	1/2022	Hall et al.
11,307,876	B1	4/2022	Leonard et al.
11,366,644	B1	6/2022	Krebs et al.
2002/0105296	A1	8/2002	Okuyama et al.
2003/0191559	A1 *	10/2003	Chatsinchai ..... G06F 9/451
			700/245
2004/0015266	A1	1/2004	Skoog
2005/0262052	A1	11/2005	Daniels et al.
2006/0184293	A1	8/2006	Konandreas et al.
2009/0064177	A1	3/2009	Bauer et al.
2010/0076600	A1	3/2010	Cross et al.
2012/0324359	A1	12/2012	Lee et al.
2012/0331404	A1	12/2012	Buford et al.
2013/0297678	A1	11/2013	Schach et al.
2015/0363224	A1	12/2015	Argenti et al.
2016/0259651	A1 *	9/2016	Nychis ..... G06F 11/36
2016/0259655	A1	9/2016	Nychis et al.
2016/0288322	A1	10/2016	Lin et al.
2017/0052824	A1	2/2017	Sharma et al.
2017/0076194	A1	3/2017	Versace et al.
2017/0295243	A1 *	10/2017	Kim ..... H04L 67/131
2018/0041591	A1 *	2/2018	Yoden ..... H04L 12/2814
2018/0074636	A1 *	3/2018	Lee ..... G06F 3/0488
2018/0074931	A1	3/2018	Garcia et al.
2018/0121217	A1	5/2018	Jarabek et al.
2018/0197123	A1	7/2018	Parimelazhagan et al.
2018/0370033	A1	12/2018	Geffen et al.
2019/0004932	A1	1/2019	Misra et al.
2019/0022856	A1	1/2019	Kulläng
2019/0122200	A1	4/2019	Kurian
2019/0129824	A1	5/2019	Radhakrishnan et al.
2019/0130094	A1	5/2019	Votaw et al.
2019/0132229	A1	5/2019	McCormack et al.
2019/0138600	A1	5/2019	Krishnan et al.
2019/0155225	A1	5/2019	Kothandaraman et al.
2019/0171845	A1	6/2019	Dotan-Cohen et al.
2019/0215283	A1	7/2019	Nahum et al.
2019/0303779	A1	10/2019	Briggle et al.
2020/0001471	A1	1/2020	Chen et al.
2020/0004798	A1	1/2020	Weinert, Jr. et al.
2020/0019283	A1	1/2020	Nychis et al.
2020/0147791	A1	5/2020	Safary et al.
2020/0180155	A1	6/2020	Hall
2020/0213422	A1	7/2020	Pandya et al.
2020/0233707	A1	7/2020	Ramamurthy et al.
2020/0246978	A1 *	8/2020	Johnson ..... B25J 9/1666
2020/0348654	A1	11/2020	Anand et al.
2020/0348960	A1	11/2020	Krishnamurthy et al.
2020/0348964	A1	11/2020	Anand et al.
2020/0356395	A1	11/2020	Deng et al.
2021/0042338	A1	2/2021	Smutko et al.

2021/0086354	A1	3/2021	Berg et al.
2021/0109717	A1	4/2021	Voicu et al.
2021/0110035	A1 *	4/2021	Seth ..... G06N 5/04
2021/0122032	A1 *	4/2021	Davis ..... G06F 9/4862
2021/0125025	A1	4/2021	Kuo et al.
2021/0129325	A1	5/2021	Yu et al.
2021/0146537	A1	5/2021	Bannoura
2021/0252703	A1	8/2021	Hall
2021/0258389	A1	8/2021	Hall et al.
2021/0357236	A1 *	11/2021	Cohen ..... G06F 8/34
2022/0011732	A1	1/2022	Hall
2022/0012152	A1	1/2022	Dines
2022/0070246	A1	3/2022	Ripa
2023/0033945	A1	2/2023	Xue et al.

## FOREIGN PATENT DOCUMENTS

CN	109074402	A	12/2018
CN	109118347	A	1/2019
CN	201910345536	A	7/2019
CN	110286998	A	9/2019
CN	110648054	A	1/2020
IN	109636504	A	4/2019
JP	2006000954	A	1/2006
JP	5607741	B2	10/2014
JP	2018535459	A	11/2018
JP	6532626	B1	6/2019
JP	2019159556	A	9/2019
JP	2019169044	A	10/2019
JP	20200003905	A	1/2020
JP	202000017099		1/2020
JP	2020092400	A	6/2020

## OTHER PUBLICATIONS

Borhan Amini , Robotic Process Automation Implementation within an organization. (Year: 2019).\*

Lechi Truong, "Non-Final Office Action", dated Mar. 16, 2023, U.S. Appl. No. 17/583,044.

Notification of Reasons for Refusal issued in Japanese Application No. 2020-553457 dated Apr. 10, 2023.

Reddy, et al., "A Study of Robotic Process Automation Among Artificial Intelligence", International Journal of Scientific and Research Publications, vol. 9, Issue 2, Feb. 2019.

Second Office Action issued in Chinese Application No. 202080002309.8 dated Jan. 20, 2023.

Anagnoste, Sorin, "Robotic Automation Process—The Operating System for the Digital Enterprise", 2018.

Lechi Truong, "Notice of Allowance", dated Mar. 23, 2022, U.S. Appl. No. 16/989,003.

Office Action issued in Chinese Application No. 202010894023.7 dated Feb. 8, 2022.

Search Report issued in Chinese Application No. 202010894023.7 dated Feb. 8, 2022.

First Office Action issued in Chinese Application No. 202080002309.8 dated Aug. 1, 2022.

Notice of Allowance issued in Korean Application No. 10-2020-7028190 dated Aug. 27, 2022.

U.S. Appl. No. 15/930,906, filed May 13, 2020, Andrew Hall.

U.S. Appl. No. 16/874,593, filed May 14, 2020, Andrew Hall.

U.S. Appl. No. 16/924,910, filed Jul. 9, 2020, Daniel Dines.

U.S. Appl. No. 16/925,544, filed Jul. 10, 2020, Daniel Dines.

U.S. Appl. No. 16/989,003, filed Aug. 10, 2020, Andrew Hall.

U.S. Appl. No. 16/989,064, filed Aug. 10, 2020, Andrew Hall.

"17th Annual Meeting in Shimane Prefectural CIO Forum RPA Technologies Autonomy Introducing RPA that succeeds with the body Why is it easy to deploy horizontally even at a small start?," Nikkei BP Government Technology, Fall 2019 (No. 40), Nikkei BP, pp. 32 and 33 (Oct. 2019).

"About Session 0", Teratail [online], Leverages Co., Ltd., 201 Aug. 6, 2006, [search on Jul. 21, 3rd year of Reiwa], <https://teratail.com/questions/6404>.

"Connecting to a Console Session with Windows Remote Desktop", Tech TIPS-@IT, [online], ITmedia, Inc., Apr. 10, 2009 [Jul. 21, Reiwa 3], [atmarkit.co.jp/ait/articles/0501/15/news014.html](http://atmarkit.co.jp/ait/articles/0501/15/news014.html).

(56)

**References Cited****OTHER PUBLICATIONS**

- “Robotic Desktop Automation in 2021: In-depth Guide,” available at <https://research.aimultiple.com/rda/> (last accessed Mar. 22, 2021).
- “Robotic process automation in a virtual environment,” available at [pwc.in/assets/pdfs/publications/2018/robotic-process-automation-in-a-virtual-environment.pdf](https://pwc.in/assets/pdfs/publications/2018/robotic-process-automation-in-a-virtual-environment.pdf) (last accessed Mar. 22, 2021).
- “Special feature RPA maxim 3 Forefront of tools and technology 5 maxims to prevent failure It’s not dangerous if you know the rules,” Nikkei Computer, Issue No. 979, Nikkei BP, pp. 32 and 33, ISSN 0285-4619 (Dec. 6, 2018).
- “Special feature: Production RPA 2 Tool enhancement 3 selection points,” Nikkei Computer Data, issue No. 952, Nikkei BP, pp. 30-33, ISSN: 0285-4619 (Nov. 23, 2017).
- “Unpacking the Intelligent Technology Powering NEVA (NICE Employee Virtual Attendant,” available at [icsanalytics.com/wp-content/uploads/2018/10/NICE-Desktop-Automation-Whitepaper-ICS-Analytics.pdf](https://icsanalytics.com/wp-content/uploads/2018/10/NICE-Desktop-Automation-Whitepaper-ICS-Analytics.pdf) (Oct. 1, 2018).
- Abdou K Seye, “Final Office Action”, dated Mar. 26, 2021, U.S. Appl. No. 16/924,910.
- Abdou K Seye, “Non-Final Office Action”, dated Nov. 6, 2020, U.S. Appl. No. 16/924,910.
- Abdou K Seye, “Notice of Allowance”, dated Sep. 15, 2021, U.S. Appl. No. 16/924,910.
- AI Multiple Robotic Desktop Automation Guide available at <https://blog.aimultiple.com/rda/> (Jan. 1, 2020).
- Cristina-Claudia Osman, Robotic Process Automation: Lessons Learned from Case Studies. (Year: 2019).
- David Gauthier, et al. “Interprocess Communication for Distributed Robotics”, (Year: 1987).
- Embedding Remote Desktop ActiveX Control in a Webpage page available at <https://docs.microsoft.com/en-us/windows/win32/termserv/embedding-the-remote-desktop-activex-control-in-a-web-page> (last accessed Jan. 21, 2022).
- European Search Report issued in EP Application No. 20199147 dated Mar. 11, 2021.
- European Search Report issued in EP Application No. 20199191 dated Mar. 12, 2021.
- Examination Report issued in EP Application No. 20197271.8 dated Mar. 25, 2021.
- ICS Analytics NICE Desktop Automation Whitepaper available at [icsanalytics.com/wp-content/uploads/2018/10/NICE-Desktop-Automation-Whitepaper-ICS-Analytics.pdf](https://icsanalytics.com/wp-content/uploads/2018/10/NICE-Desktop-Automation-Whitepaper-ICS-Analytics.pdf) (last accessed Feb. 18, 2020).
- Inter-Bot Communication / Delegation Guide available at <https://botpress.com/docs/tutorials/interbot> (last accessed May 11, 2020).
- International Search Report & Written Opinion, dated Apr. 1, 2021, PCT Application No. PCT/US20/63951.
- International Search Report & Written Opinion, dated Apr. 8, 2021, PCT Application No. PCT/US20/51940.
- International Search Report & Written Opinion, PCT Application No. PCT/US20/63964.
- International Search Report and Written Opinion of the International Search Authority issued for PCT Application No. PCT/US2020/063912 dated Mar. 18, 2021.
- International Search Report and Written Opinion of the International Search Authority issued for PCT Application No. PCT/US2020/063921 dated Mar. 18, 2021.
- International Search Report and Written Opinion of the International Search Authority issued in PCT Application No. PCT/US2020/039886 dated Nov. 6, 2020.
- International Search Report and Written Opinion of the International Search Authority issued in PCT Application No. PCT/US2020/051938 dated Mar. 26, 2021.
- Jennifer L. Casper, Workflow Study on Human-Robot Interaction in USAR. (Year: 2002).
- Kenichi Kawai, “Introduction to OS / 2,” First Edition, Baifukan Co., Ltd., pp. 144-152, ISBN: 4-563-01340-4 (Jun. 30, 1988).
- Lechi Truong, “Non-Final Office Action”, dated Apr. 15, 2021, U.S. Appl. No. 16/874,593.
- Lechi Truong, “Non-Final Office Action”, dated Jun. 24, 2021, U.S. Appl. No. 15/930,906.
- Lechi Truong, “Non-Final Office Action”, dated Oct. 28, 2021, U.S. Appl. No. 16/989,003.
- Lechi Truong, “Notice of Allowance”, dated Apr. 13, 2020, U.S. Appl. No. 16/793,064.
- Lechi Truong, “Notice of Allowance”, dated Aug. 2, 2021, U.S. Appl. No. 16/989,064.
- Lechi Truong, “Notice of Allowance”, dated Jul. 29, 2021, U.S. Appl. No. 16/874,593.
- Lechi Truong, “Notice of Allowance”, dated Nov. 26, 2021, U.S. Appl. No. 15/930,906.
- Michele Amoretti et al., “Architectural paradigms for robotics applications,” Advanced Engineering Informatics, vol. 24, No. 1, pp. 4-13 (Jan. 1, 2010).
- Microfocus RPA Architecture page available at [https://docs.microfocus.com/itom/Robotic\\_Process\\_Automation:2019.07/RPAArch&gt;](https://docs.microfocus.com/itom/Robotic_Process_Automation:2019.07/RPAArch&gt;) (last accessed Dec. 30, 2020).
- Microsoft Child Sessions documentation page available at <https://docs.microsoft.com/en-us/windows/win32/termserv/child-sessions> (May 31, 2018).
- NICE RPA brochure available at [nice.com/rpa/assets/NICE\\_Advanced\\_Process\\_Automation-Brochure\\_2018.pdf](https://nice.com/rpa/assets/NICE_Advanced_Process_Automation-Brochure_2018.pdf) (last accessed May 11, 2020).
- NICE RPA chatbot page available at [nice.com/engage/blog/chatbots--robotic-automation--a-match-made-in-heaven-2315/](https://nice.com/engage/blog/chatbots--robotic-automation--a-match-made-in-heaven-2315/) (last accessed May 11, 2020).
- NICE RPA page available at <https://www.nice.com/rpa/robotic-automation/> (last accessed Jun. 15, 2020).
- Notice of Allowance issued in Japanese Patent Application No. 2020-125401 dated Aug. 4, 2021.
- Notice of Allowance issued in Korean Application No. 10-2020-0101943 dated Dec. 23, 2020.
- Notice of Allowance issued in Taiwanese Application No. 109124314 dated May 4, 2021.
- Notification of Reasons for Refusal issued in Japanese Patent Application No. 2020-125401 dated Dec. 15, 2020.
- Official Letter and Search Report issued by the Taiwan Intellectual Property Office (TIPO) dated Jan. 29, 2021.
- Pall Jensson, “Robotic Process Automation: Dynamic Roadmap for Successful Implementation” (2018).
- PWC Robotic Process Automation in a Virtual Environment brochure available [pwc.in/assets/pdfs/publications/2018/robotic-process-automation-in-a-virtual-environment.pdf](https://pwc.in/assets/pdfs/publications/2018/robotic-process-automation-in-a-virtual-environment.pdf) (May 2018).
- Quang-Vinh Dang, Scheduling a single mobile robot for part-feeding tasks of production lines. (Year: 2014).
- “Run robot scripts in separate ‘Sessions’” question page available at <https://github.com/damies13/rfswarm/issues/61> (Jan. 10, 2020).
- Abdou K Seye, “Notice of Allowance”, dated May 20, 2022, U.S. Appl. No. 16/925,544.
- Brugali, et al. “Distributed Computing in Robotics and Automation”, 2002.
- Chacon-Montero, et al. “Towards a Method for Automated Testing in Robotic Process Automation Projects”, 2019.
- Gauthier, et al., “Interprocess Communication for Distributed Robotics”, 1987.
- Notice of Allowance issued in Chinese Application No. 202010894023.7 dated Jul. 4, 2022.
- Notice of Allowance issued in Taiwanese Application No. 109133853 dated Apr. 27, 2022.
- Office Action received in European Application No. 20197271.8 dated Jun. 10, 2022.
- Notice of Allowance issued in Korean Application No. 10-2020-7028231 dated Nov. 4, 2022.
- Notification of Reasons for Refusal issued in Japanese Application No. 2020-553457 dated Nov. 4, 2022.
- Examination Report issued in EP Application No. 20199191.6 dated Jul. 19, 2023.
- Examination Report issued in European Application No. 20199147.8 dated Sep. 1, 2023.
- Radoslaw Dukalski, Portable rapid visual workflow simulation tool for human robot coproduction. (Year: 2017).

(56)

**References Cited**

OTHER PUBLICATIONS

Remote Desktop ActiveX Control Classes Page available at <https://docs.microsoft.com/en-us/windows/win32/termserv/remote-desktop-activex-control-classes> (last accessed Jan. 20, 2022).

Remote Desktop ActiveX Control Classes page available at <https://docs.microsoft.com/en-us/windows/win32/termserv/remote-desktop-activex-control-classes> (last accessed Jan. 21, 2022).

Shinichi Hoshi, “Let’s Warp, OS / 2 Programming 3rd Multitasking System’s Interprocess Communication,” DDJ (Dr. Dobb’s Journal Japan), Shoeisha Co., Ltd., pp. 170-176 (Jul. 1, 1995).

Solomiya Yatskiv, Improved Method of Software Automation Testing Based on the Robotic Process Automation Technology. (Year: 2019).

Sumi Takano, “How to create a parallel program in OS / 2 (I),” Information Processing, vol. 31, No. 10, Information Processing Society of Japan, pp. 1425-1432, ISS: 0447-8053 (Oct. 15, 1990). Supplementary European Search Report issued for EP Application No. 20197271.8 dated Feb. 26, 2021.

UiPath Extension for Windows Remote Desktop page available at <https://docs.uipath.com/studio/docs/extension-for-windows-remote-desktop> (last accessed Feb. 14, 2020).

UiPath Robot Agent documentation available at <https://docs.uipath.com/robot/docs/robot-agent> (last accessed Feb. 14, 2020).

Windows Remote Desktop Services roles page available at <https://docs.microsoft.com/en-us/windows-server/remote/remote-desktop-services/rds-roles> (last accessed Jan. 20, 2022).

Notice of Allowance issued in Japanese Application No. 2020-553457 dated Oct. 4, 2023.

Abdou K Seye, “Non-Final Office Action”, dated Aug. 18, 2023, U.S. Appl. No. 17/867,131.


James W. McKee, A Graphical, Rule Based Robotic Interface System. (Year: 1988).

Lechi Truong, “Final Office Action”, dated Sep. 11, 2023, U.S. Appl. No. 17/583,044.


Lechi Truong, “Notice of Allowance”, dated Sep. 20, 2023, U.S. Appl. No. 17/583,044.


Notice of Allowance issued in U.S. Appl. No. 17/867,238 dated Jun. 30, 2023.


\* cited by examiner

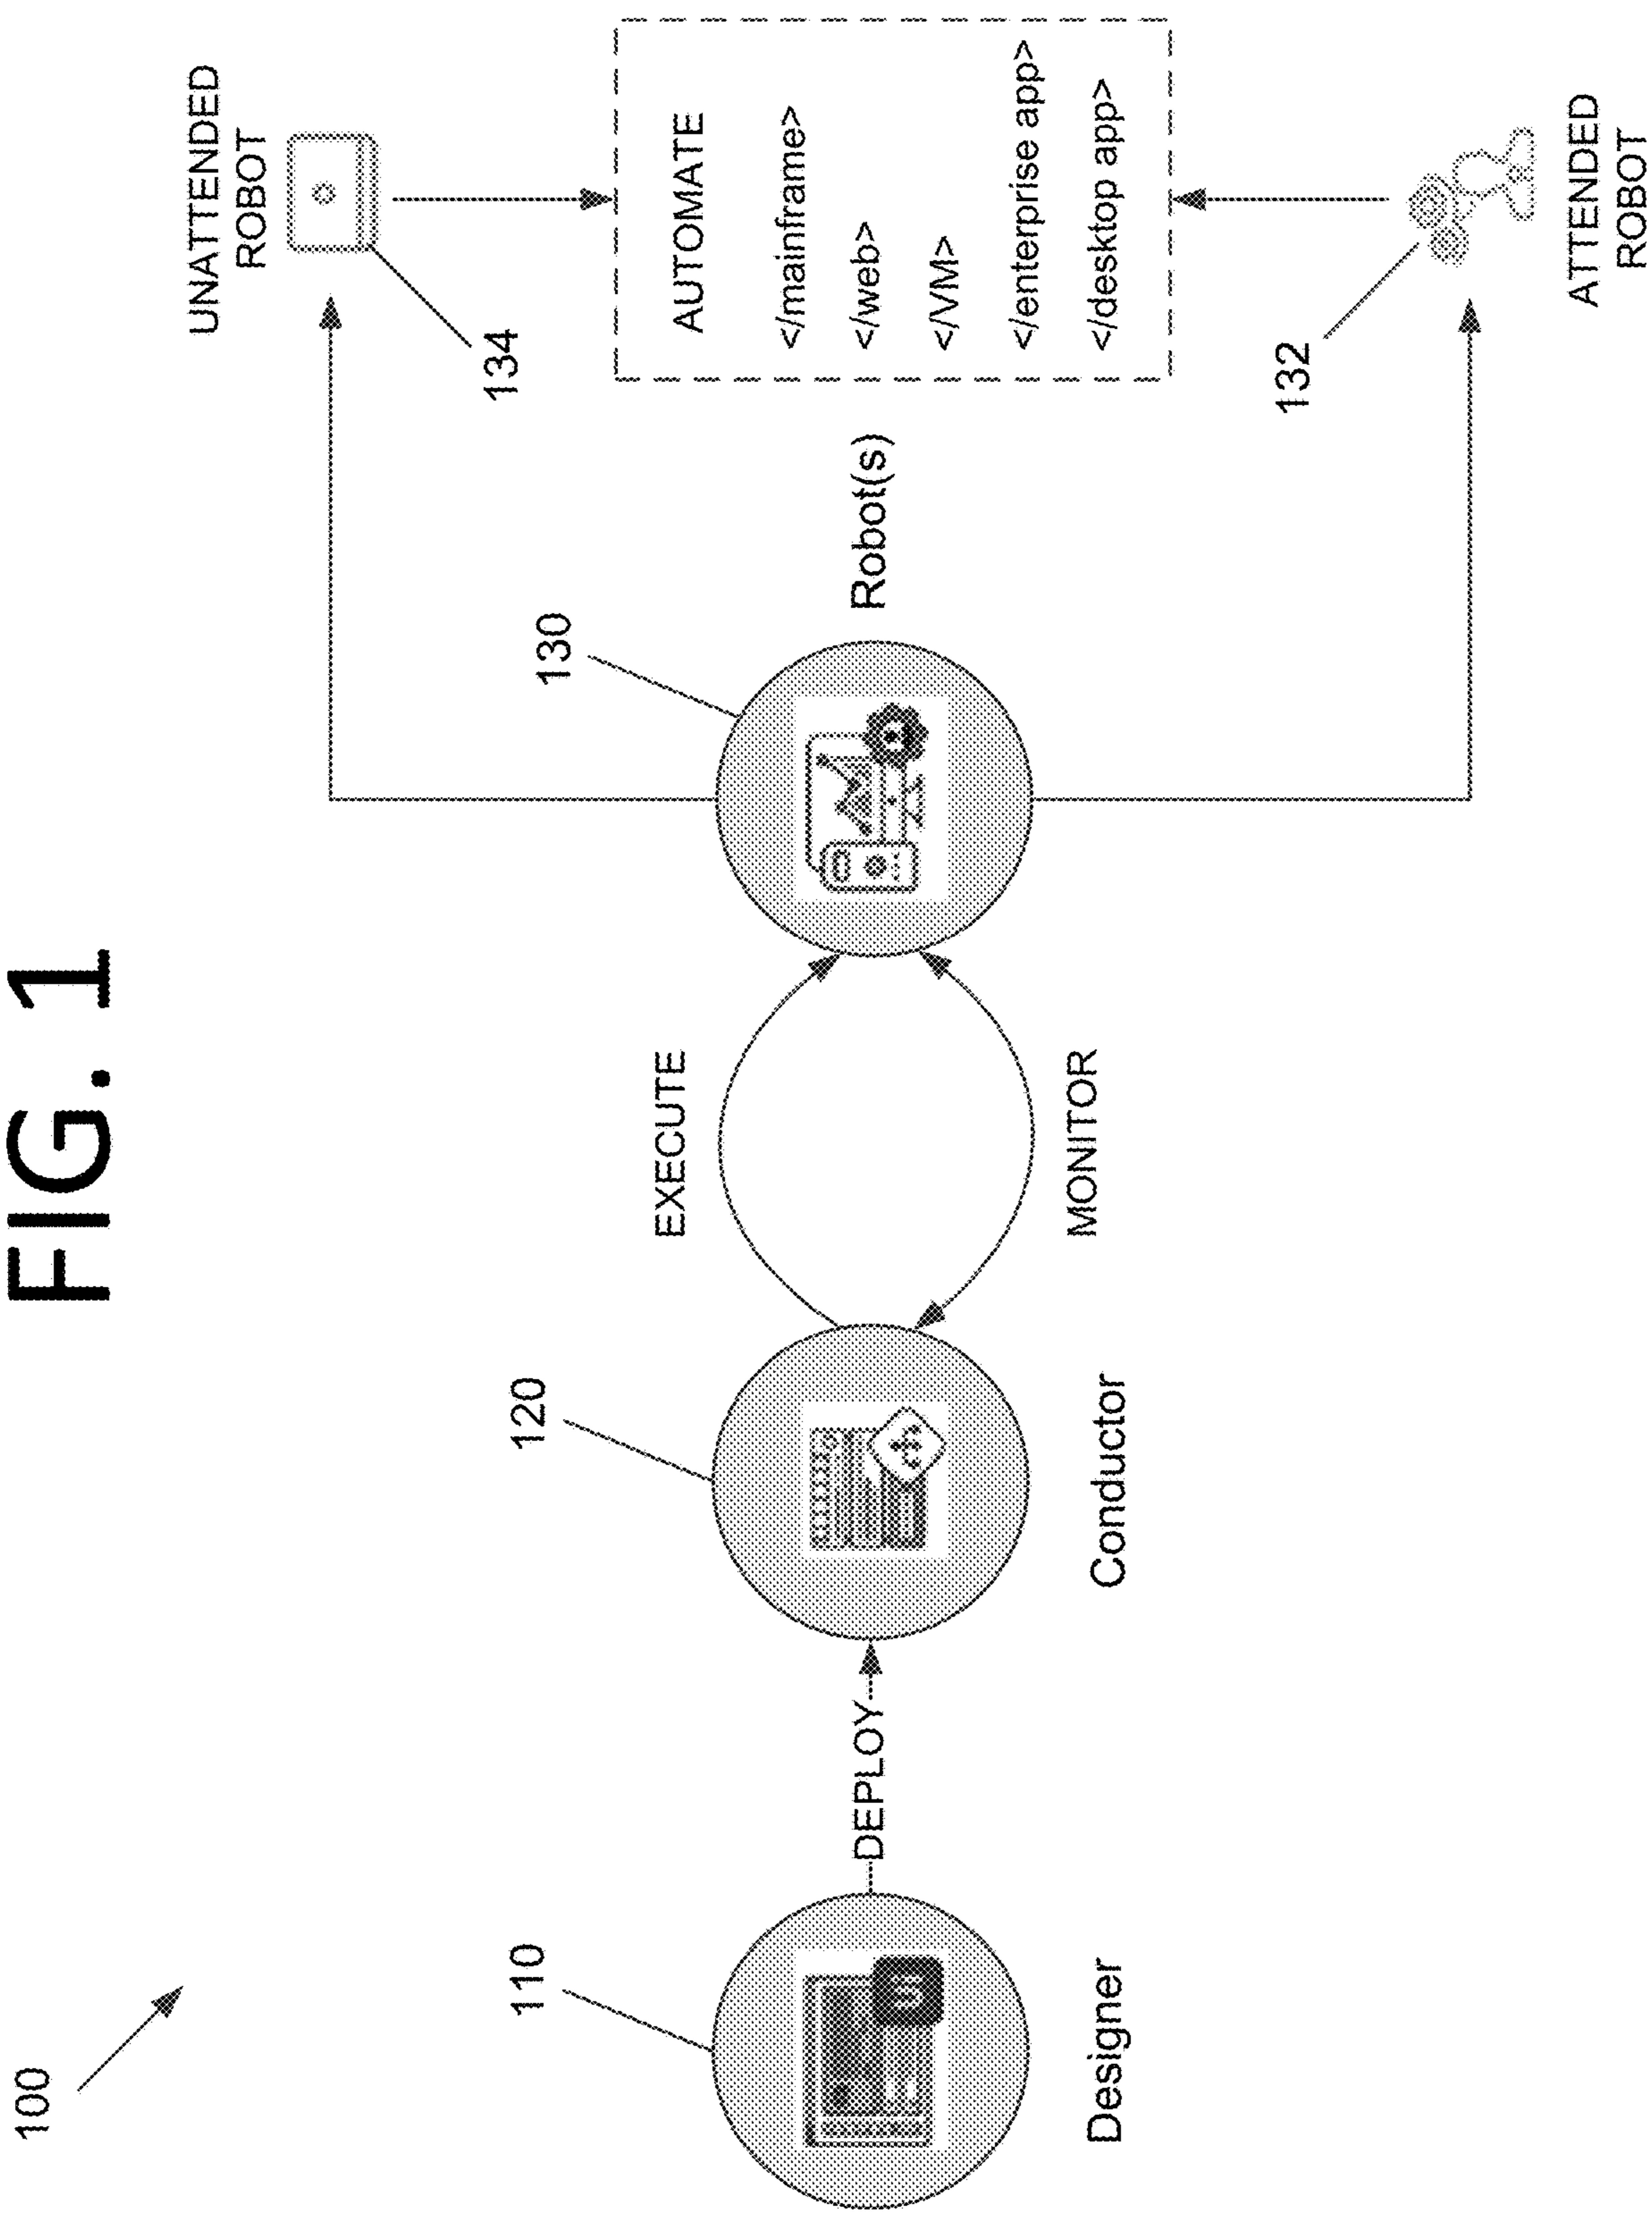
**FIG. 1**


200  
220 FIG. 2 212  
216

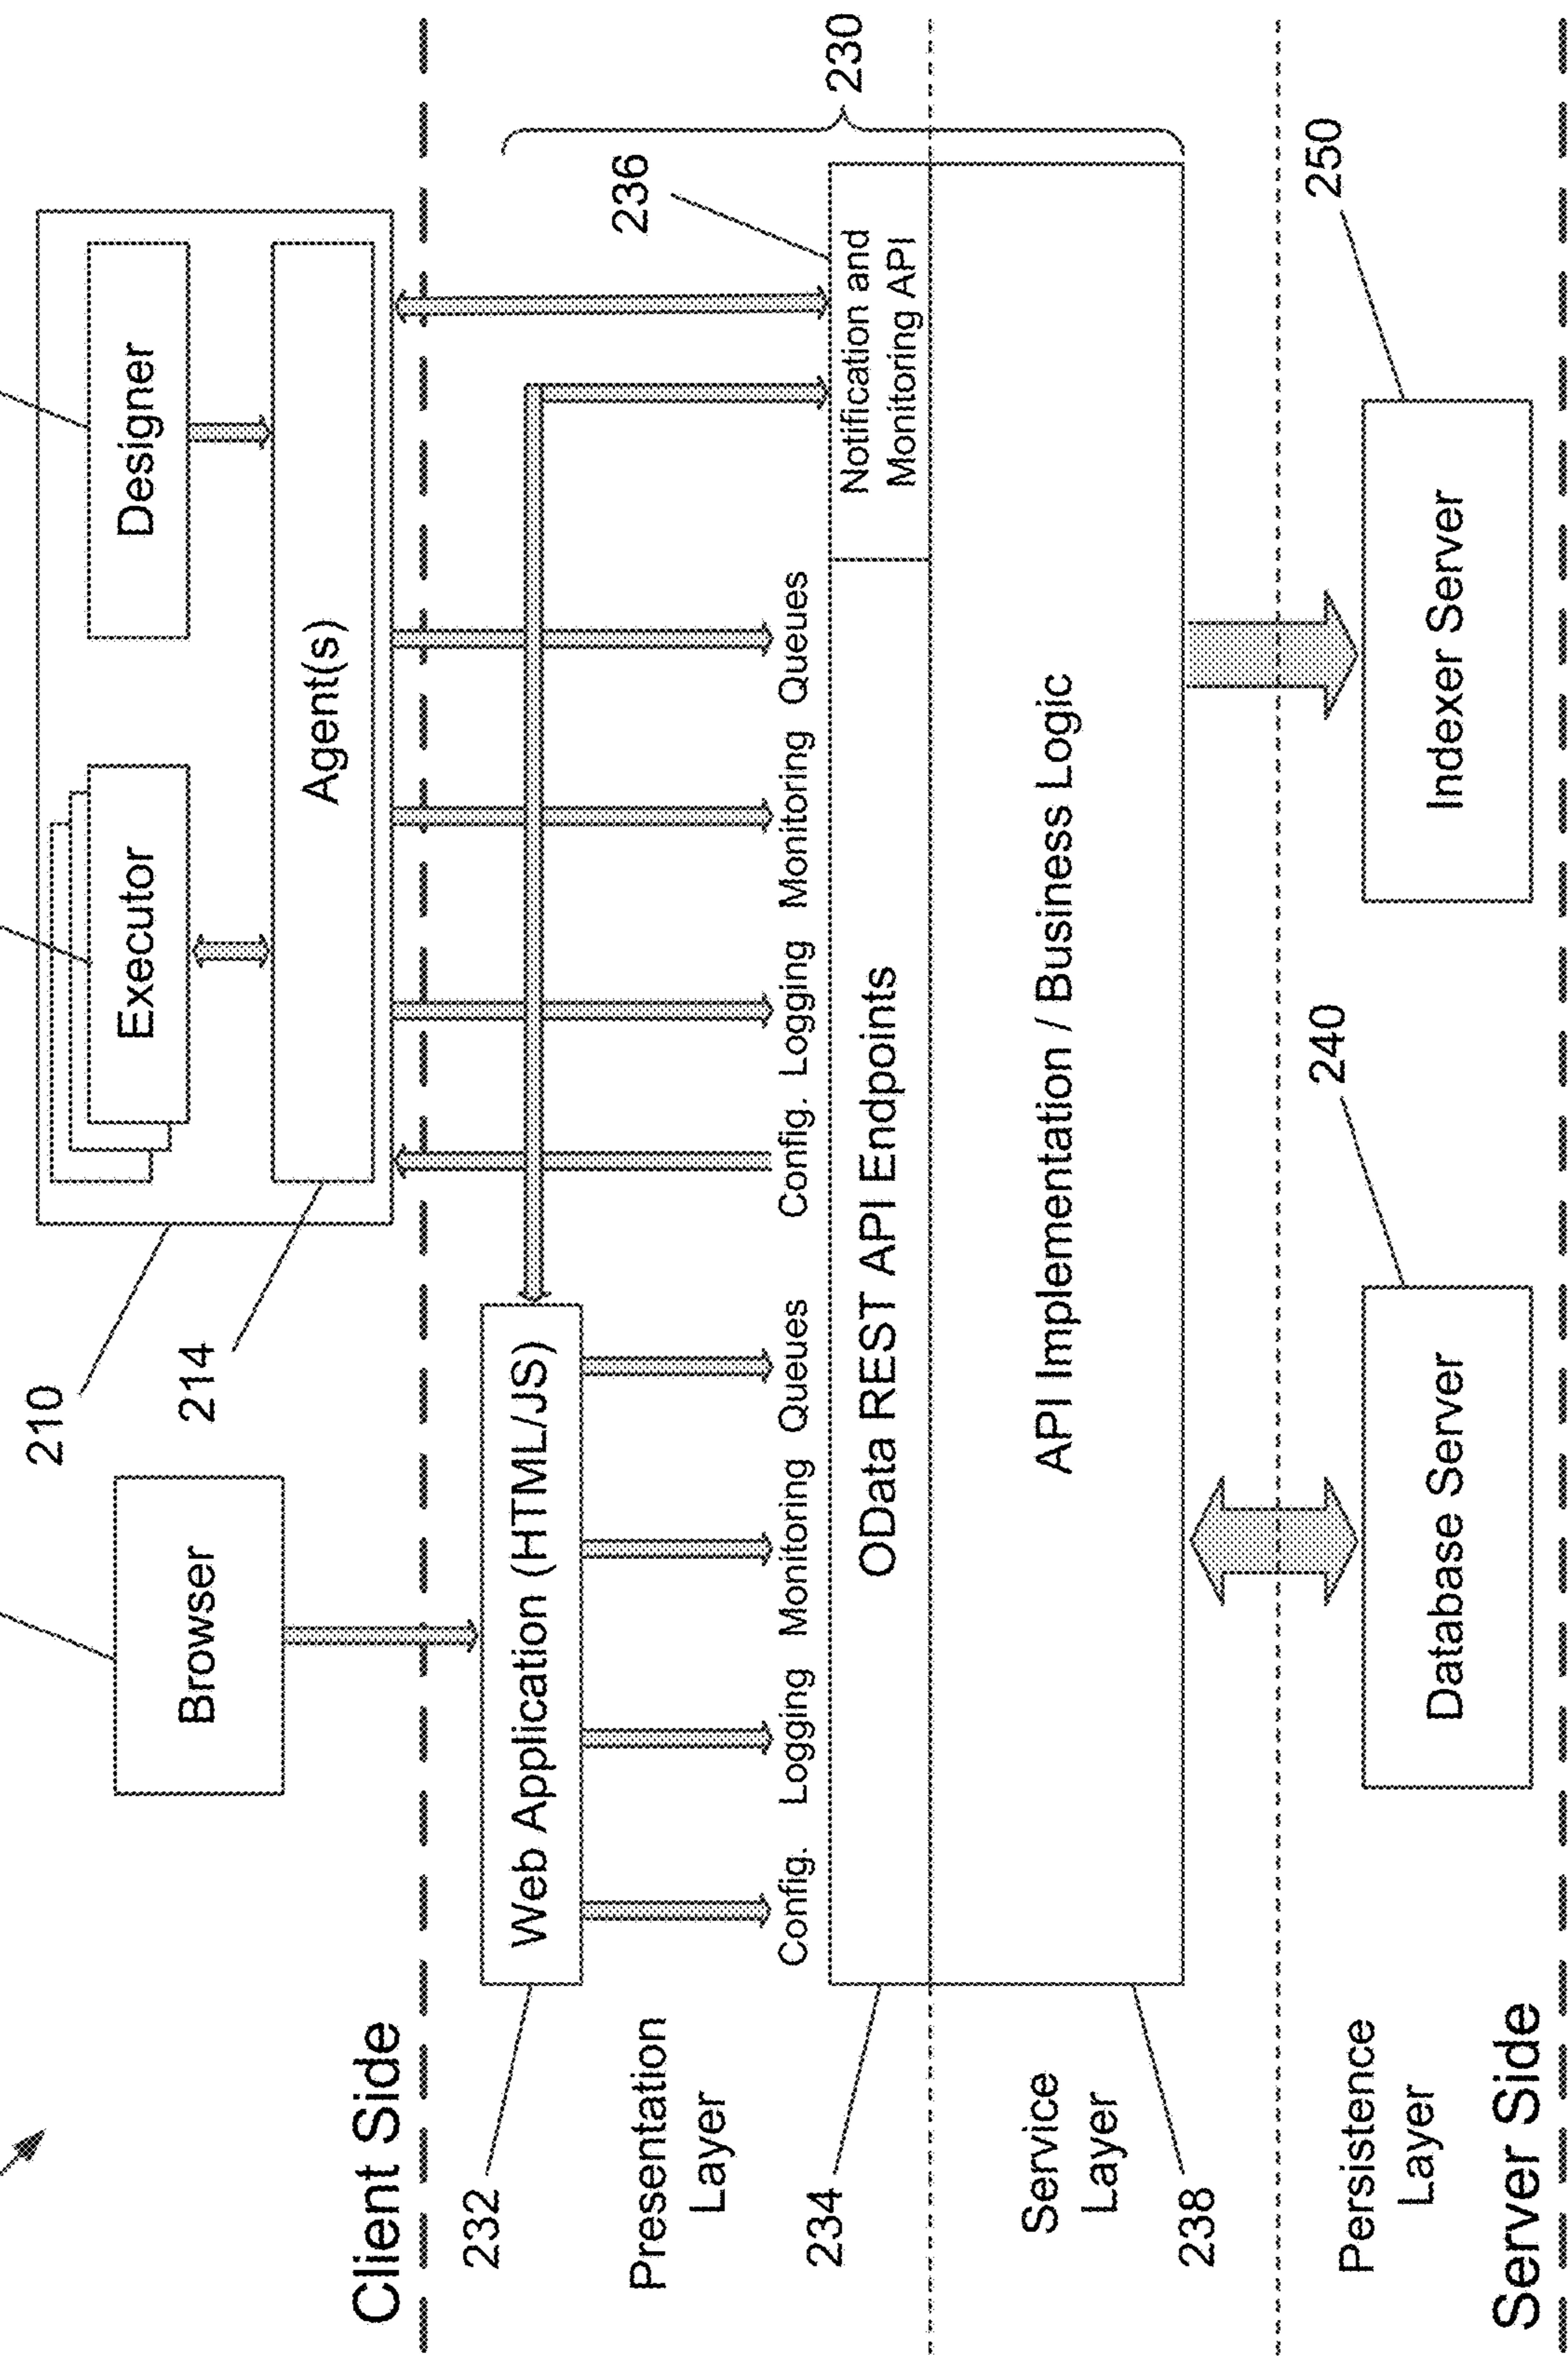

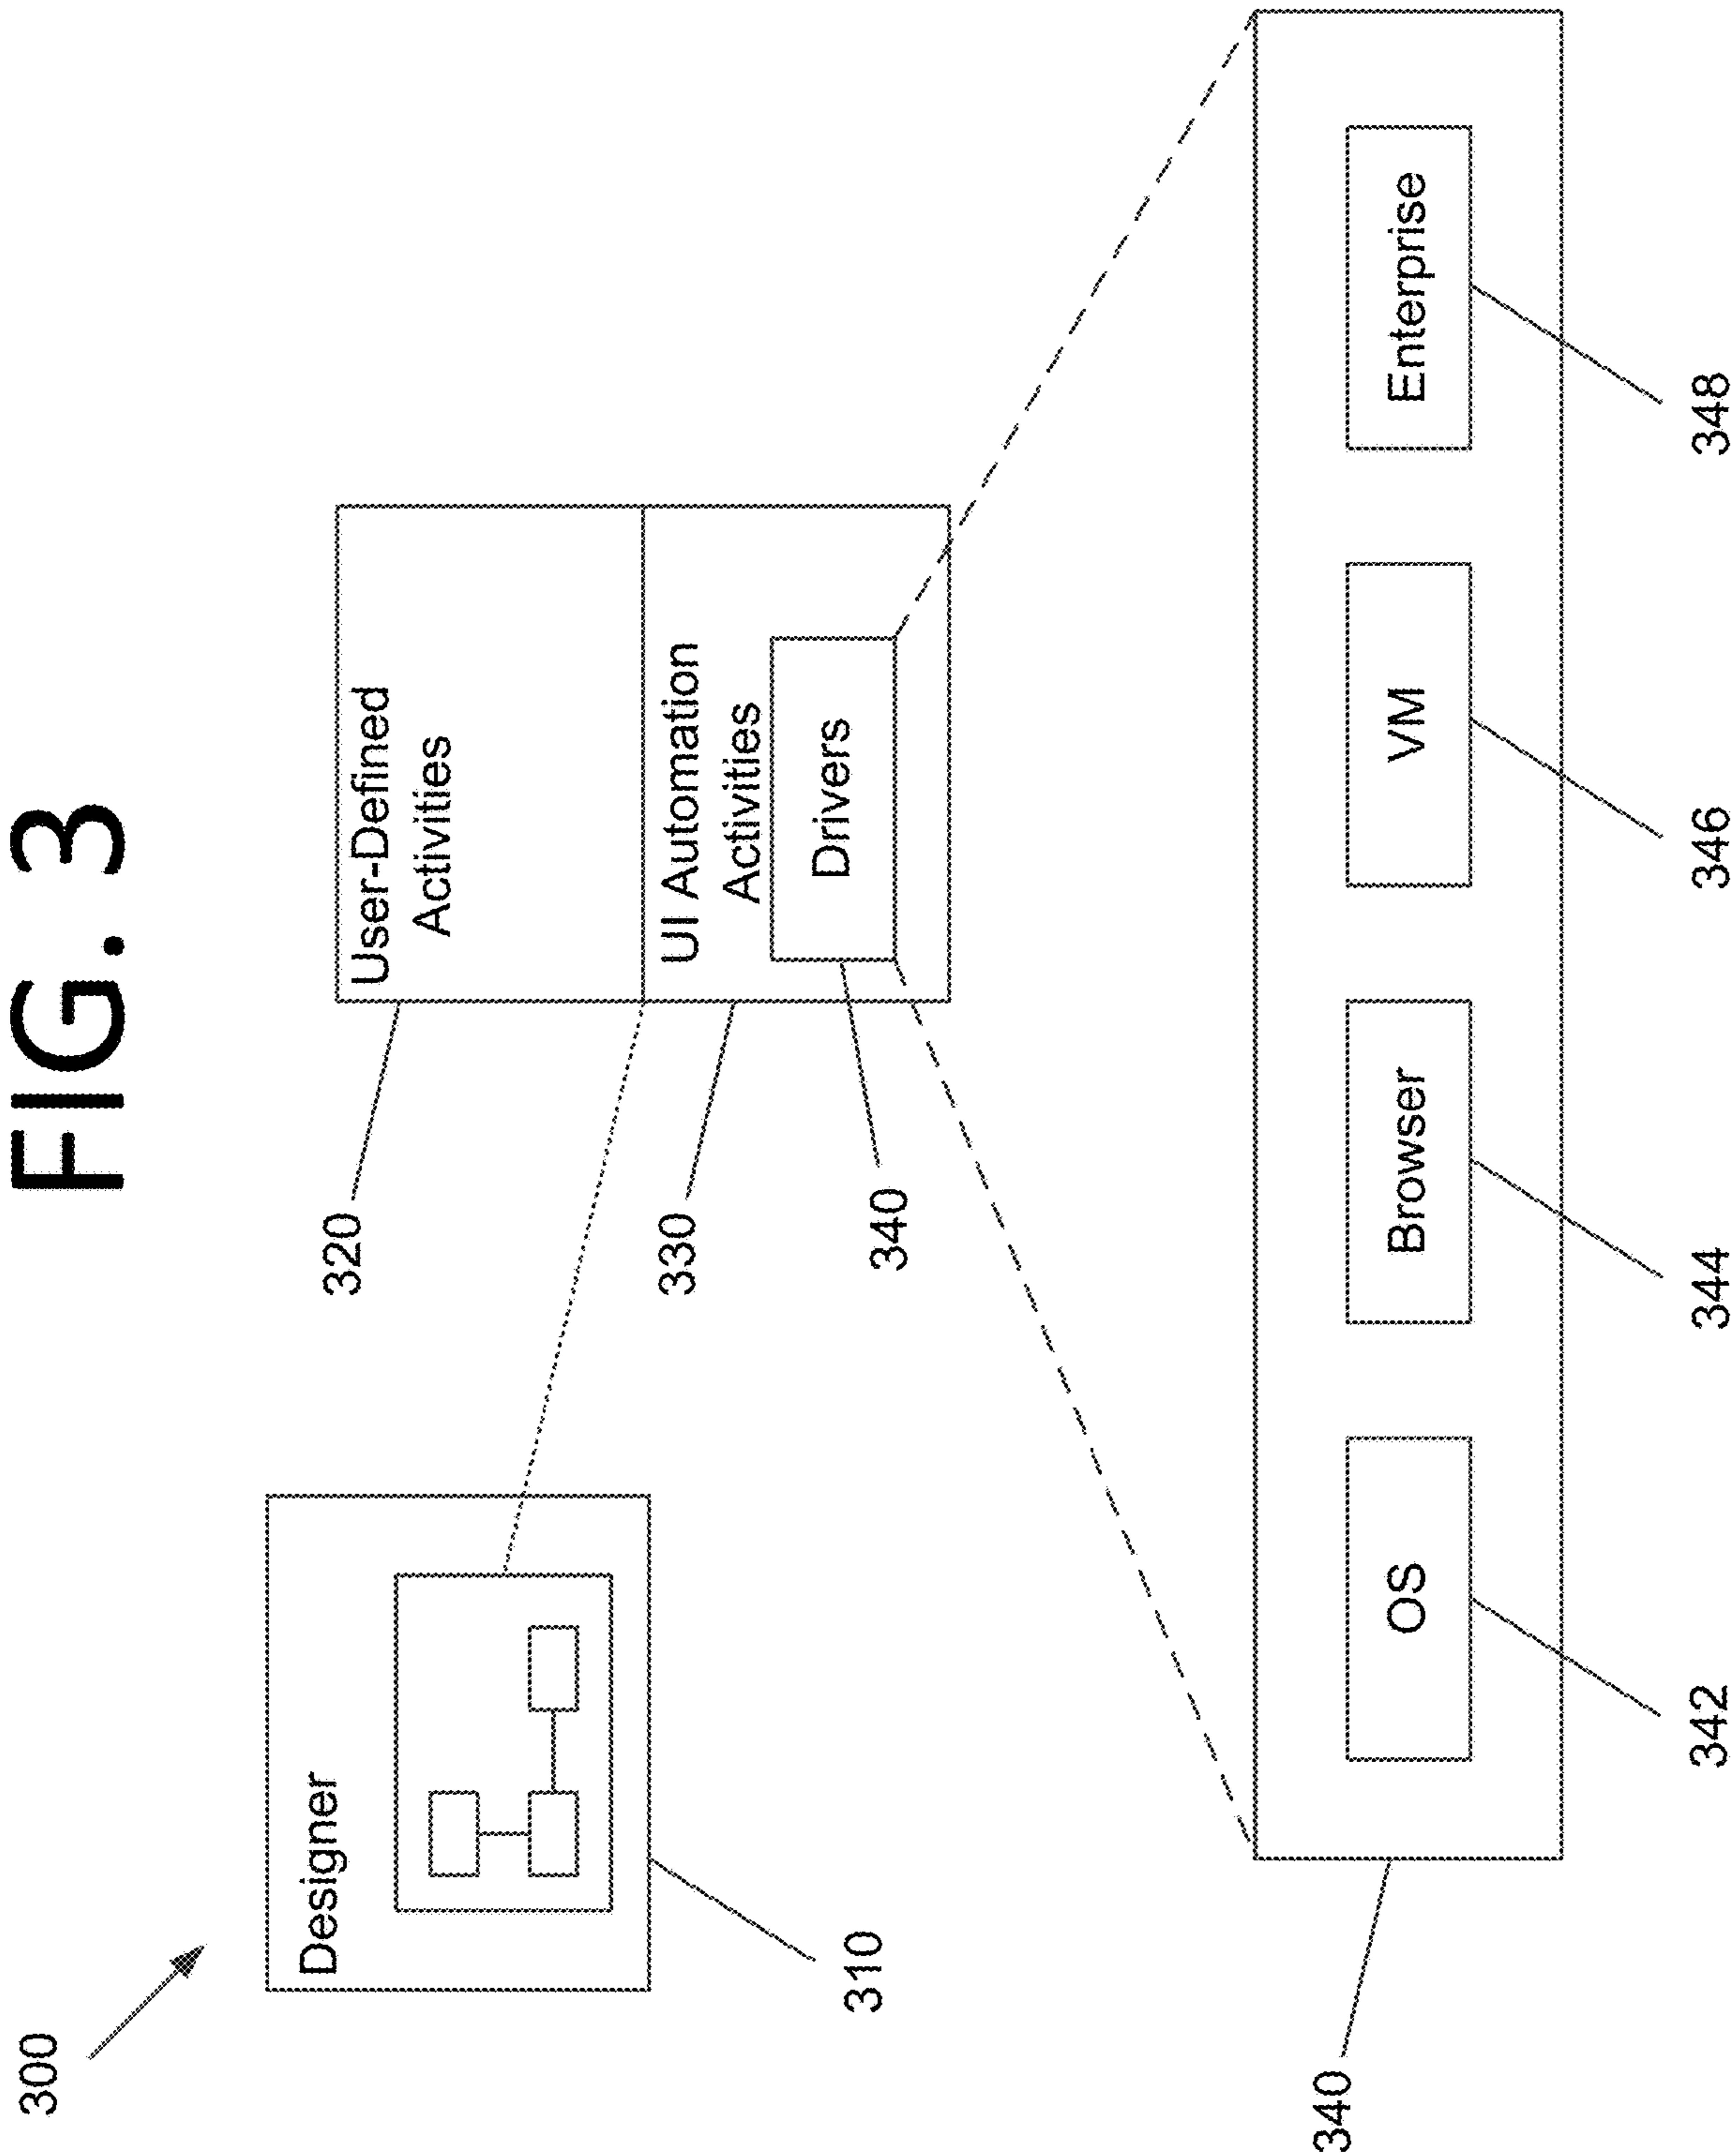**FIG. 3**

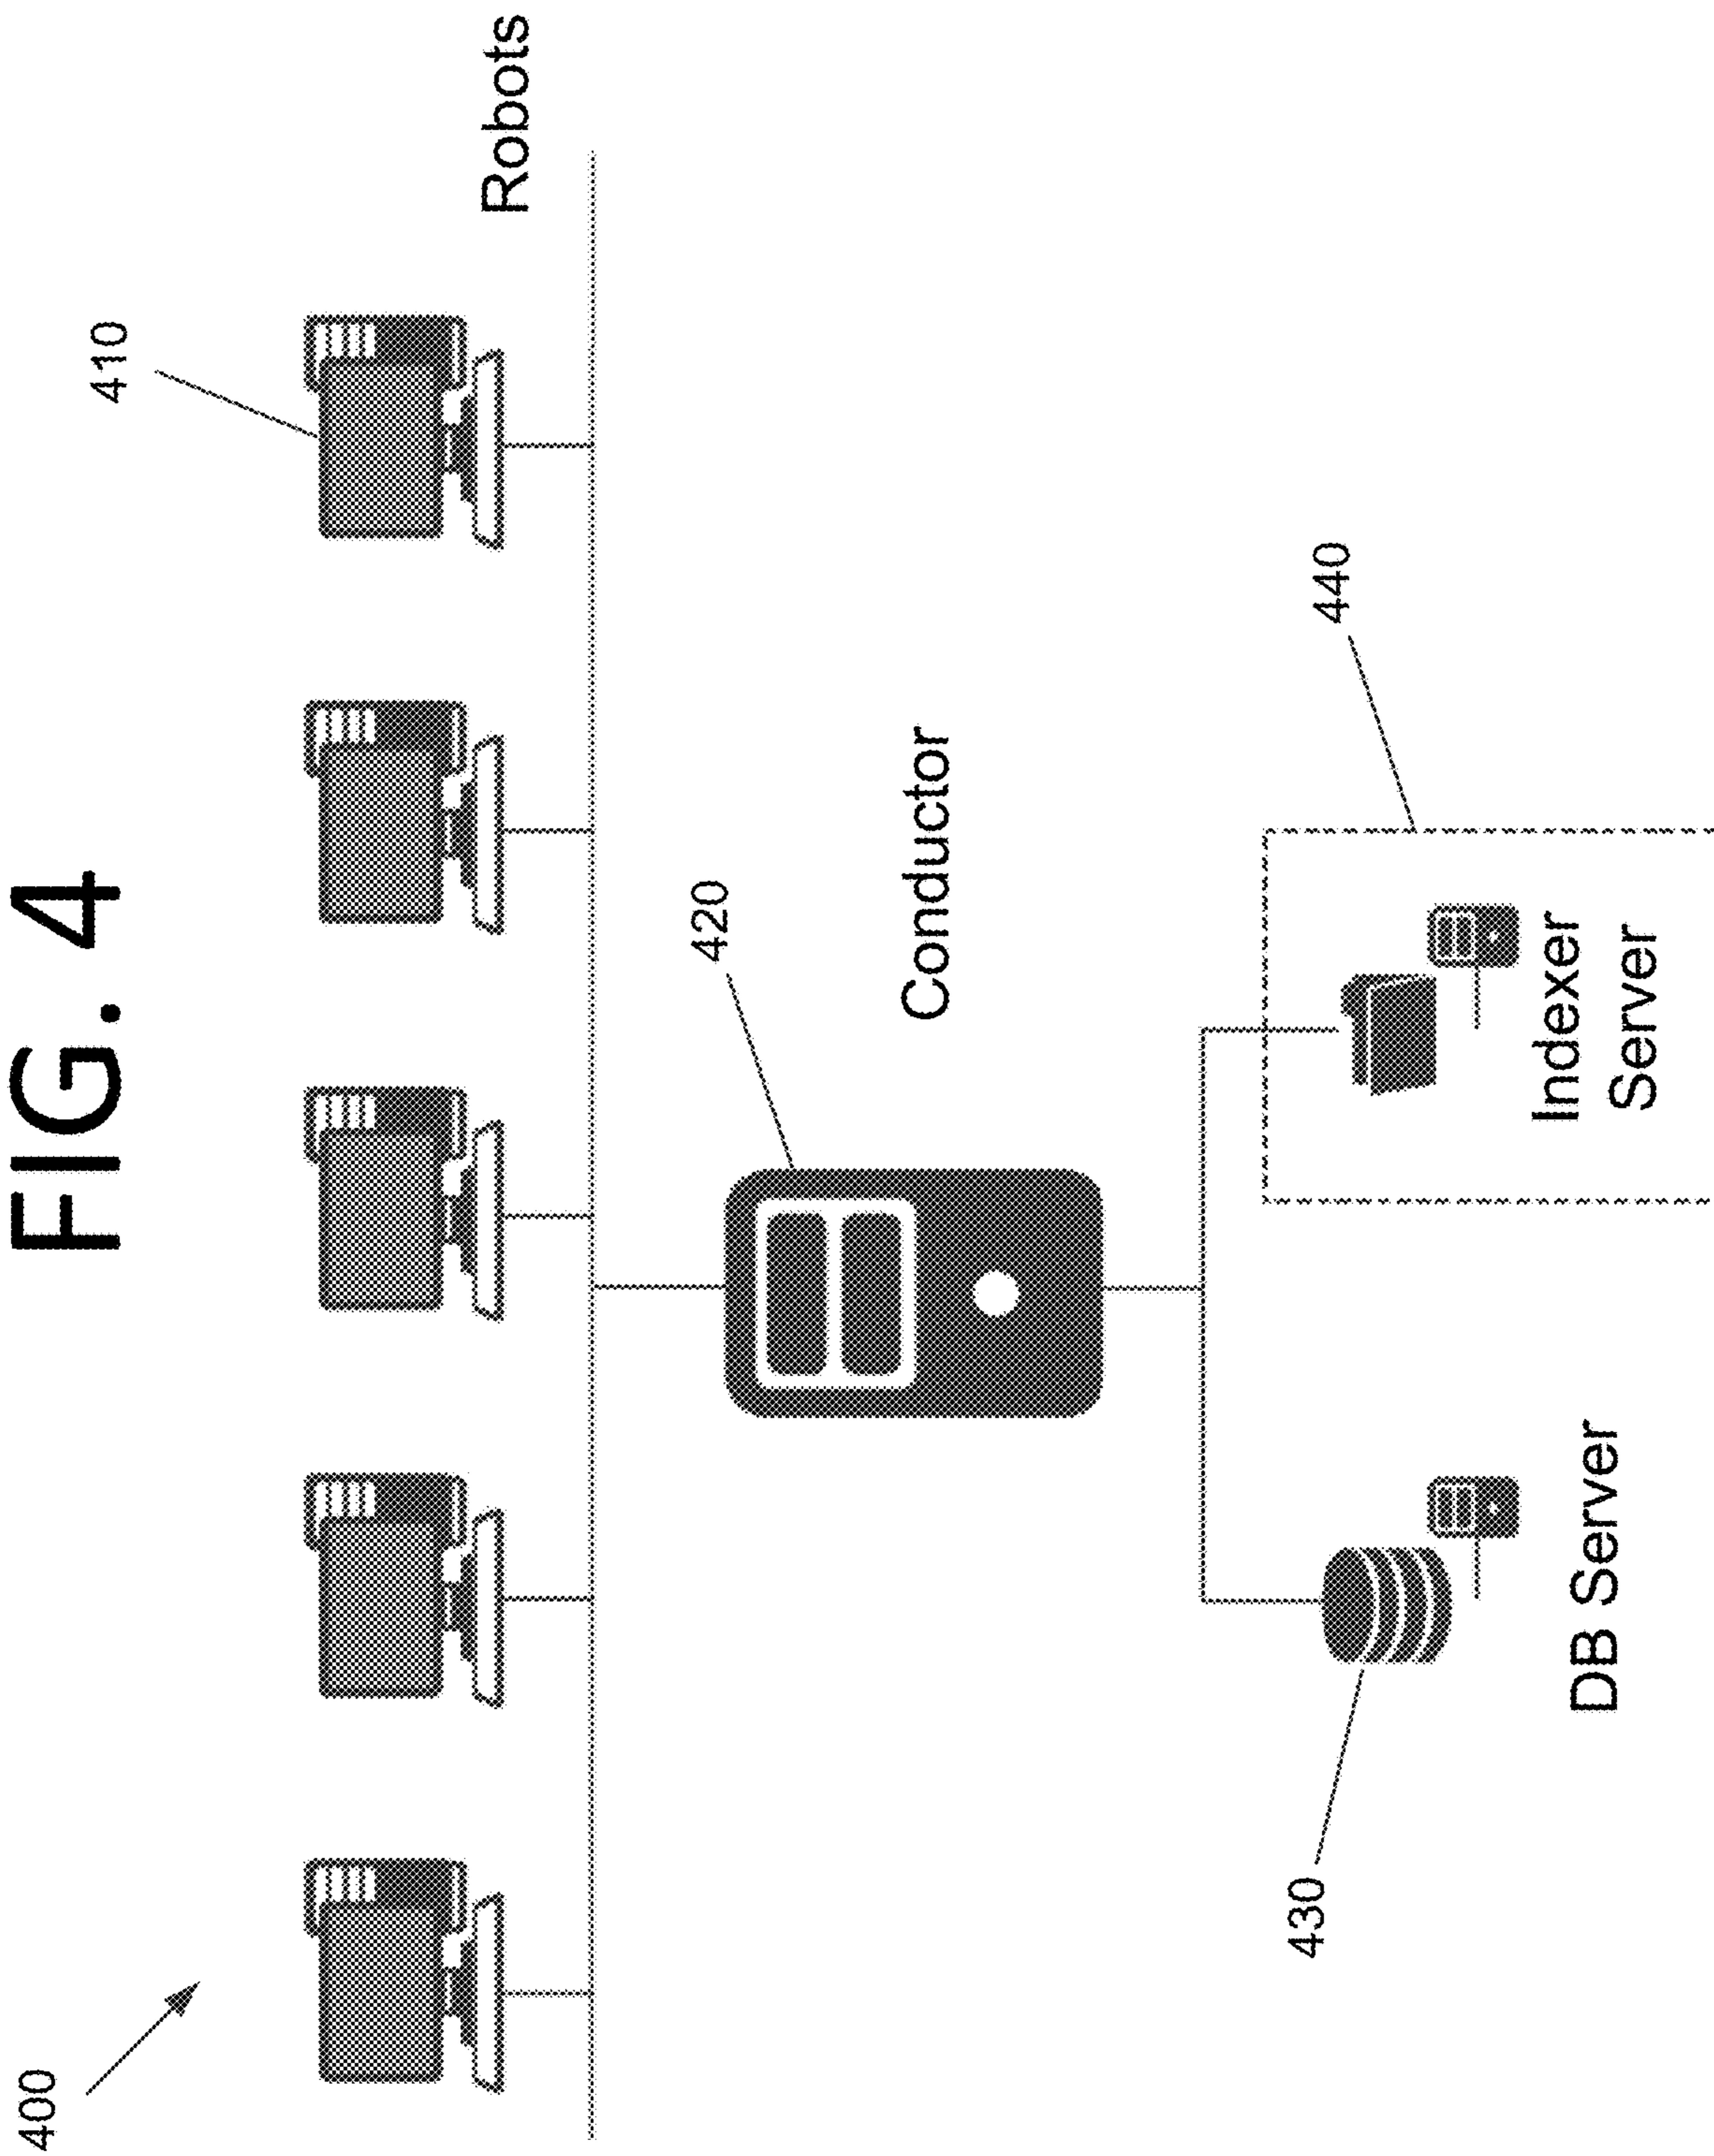
**FIG. 4**

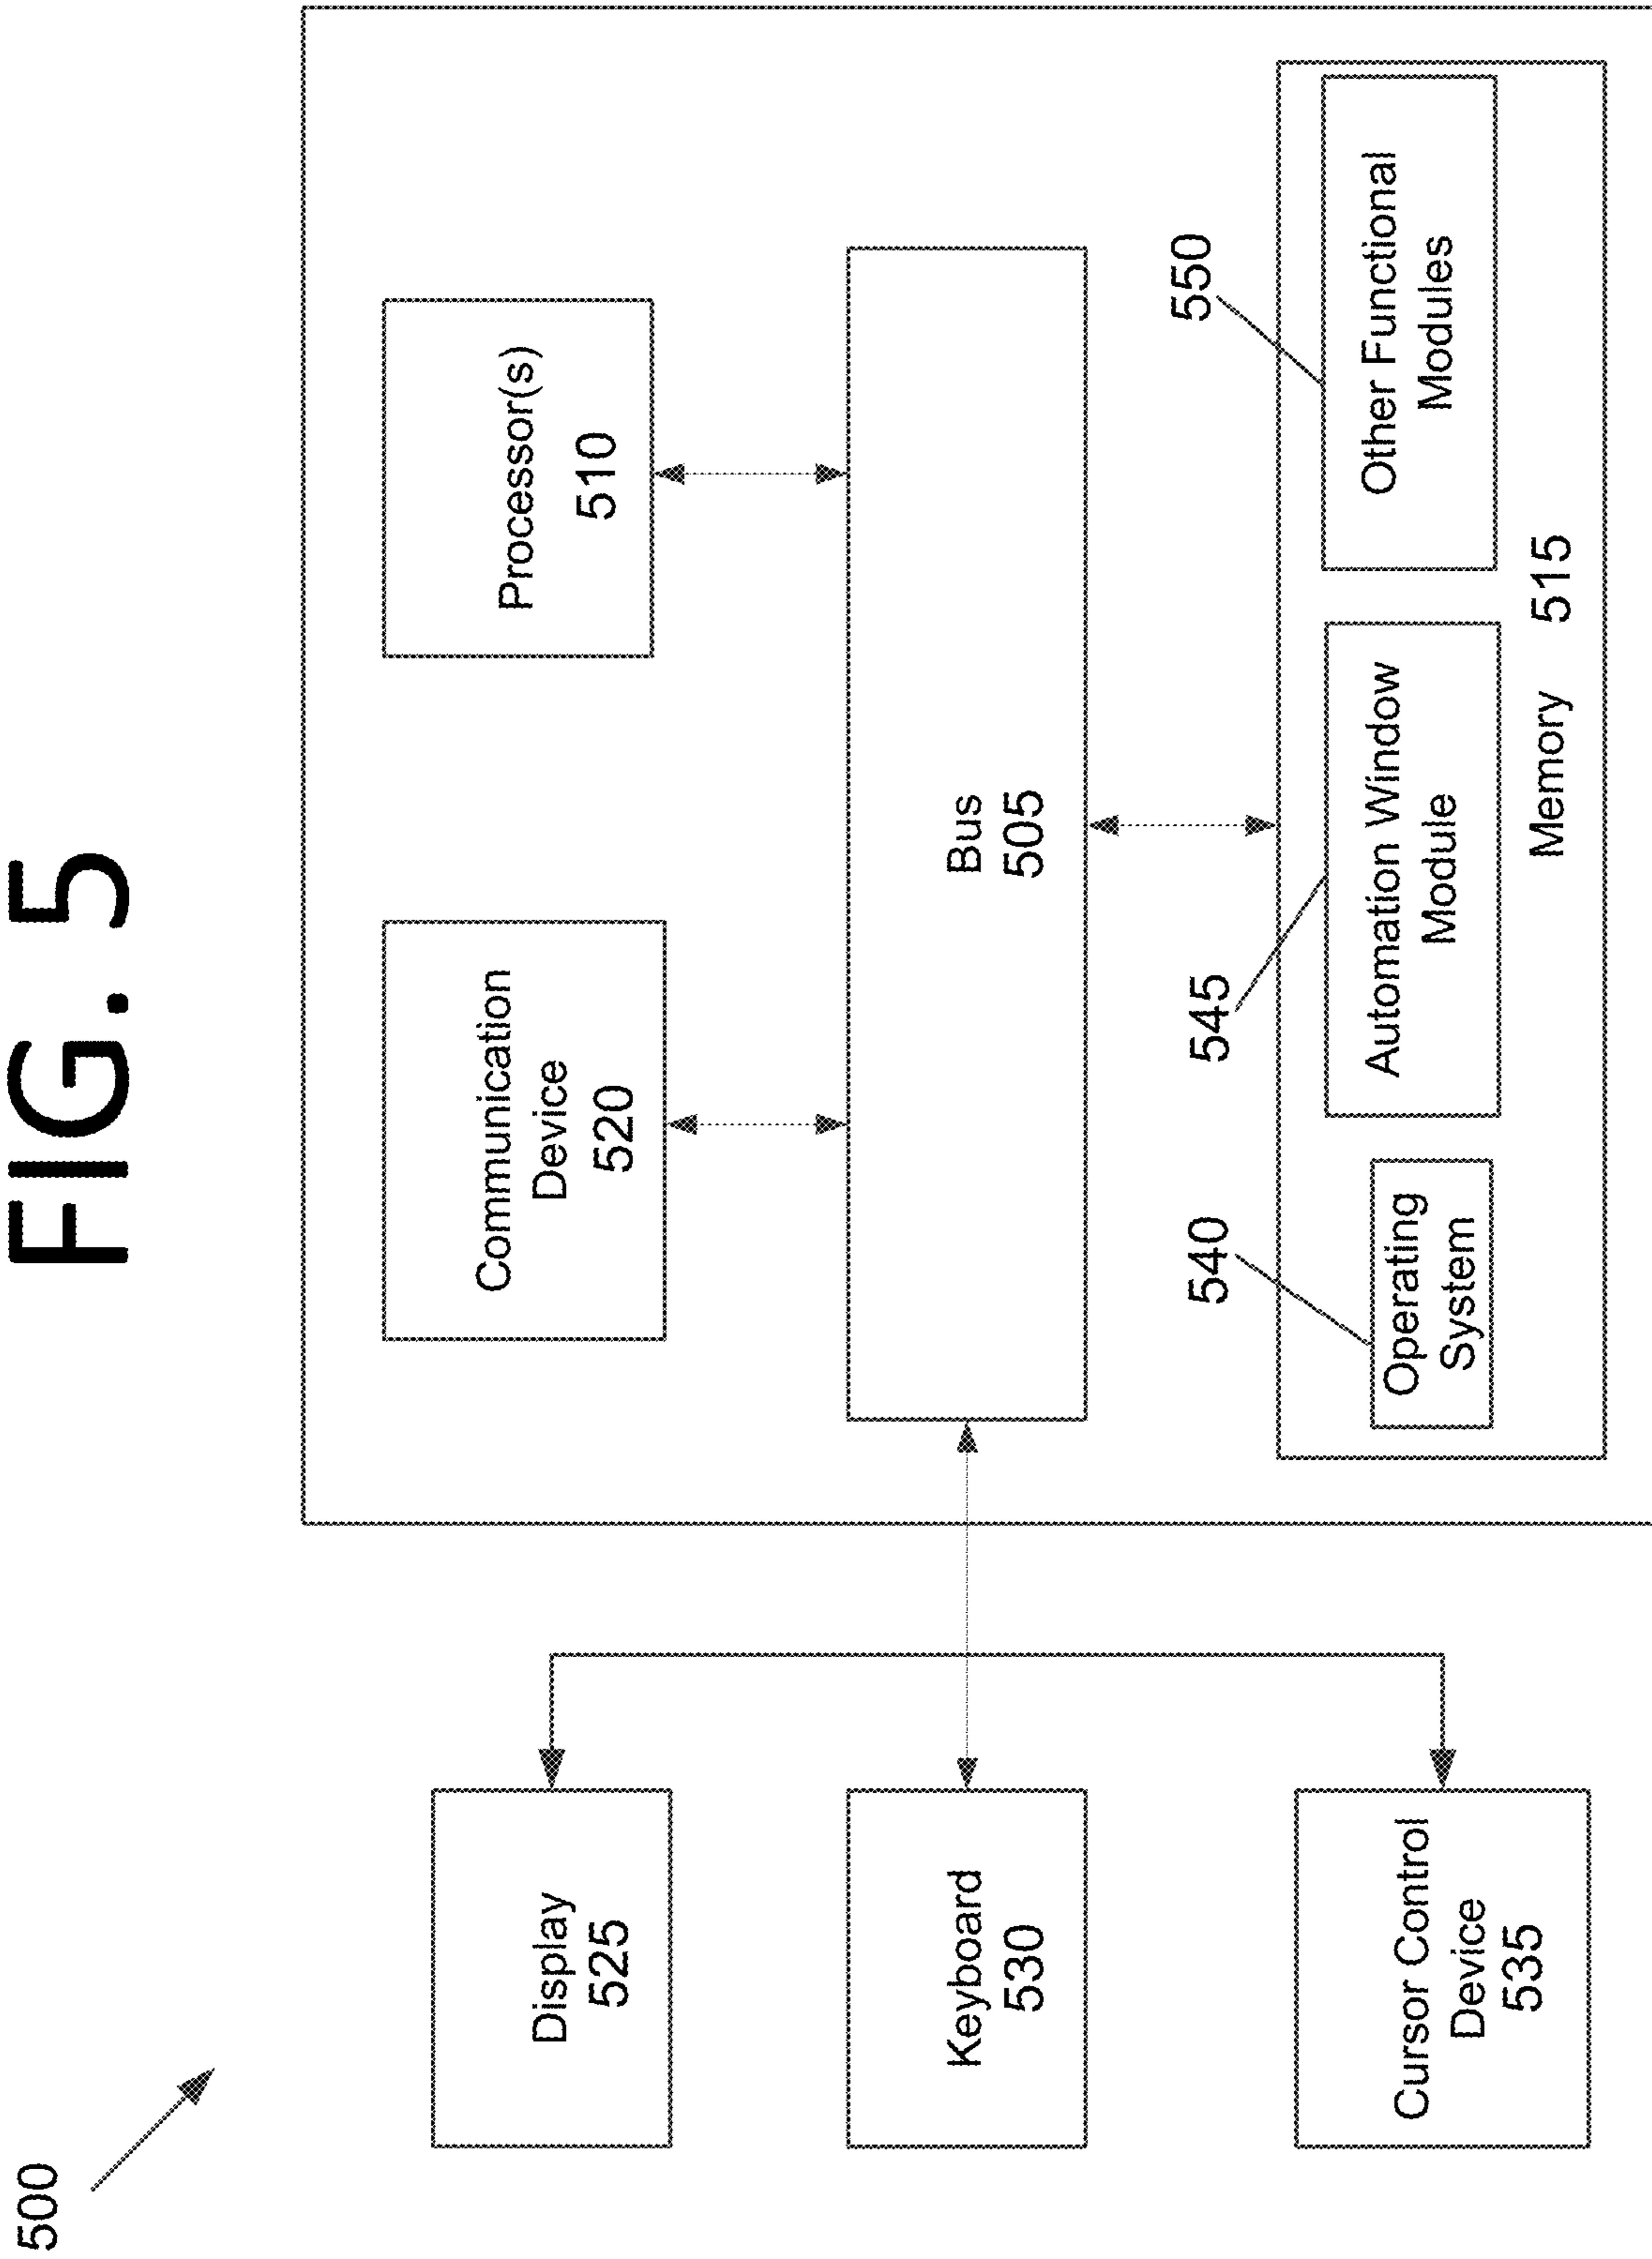**FIG. 5**

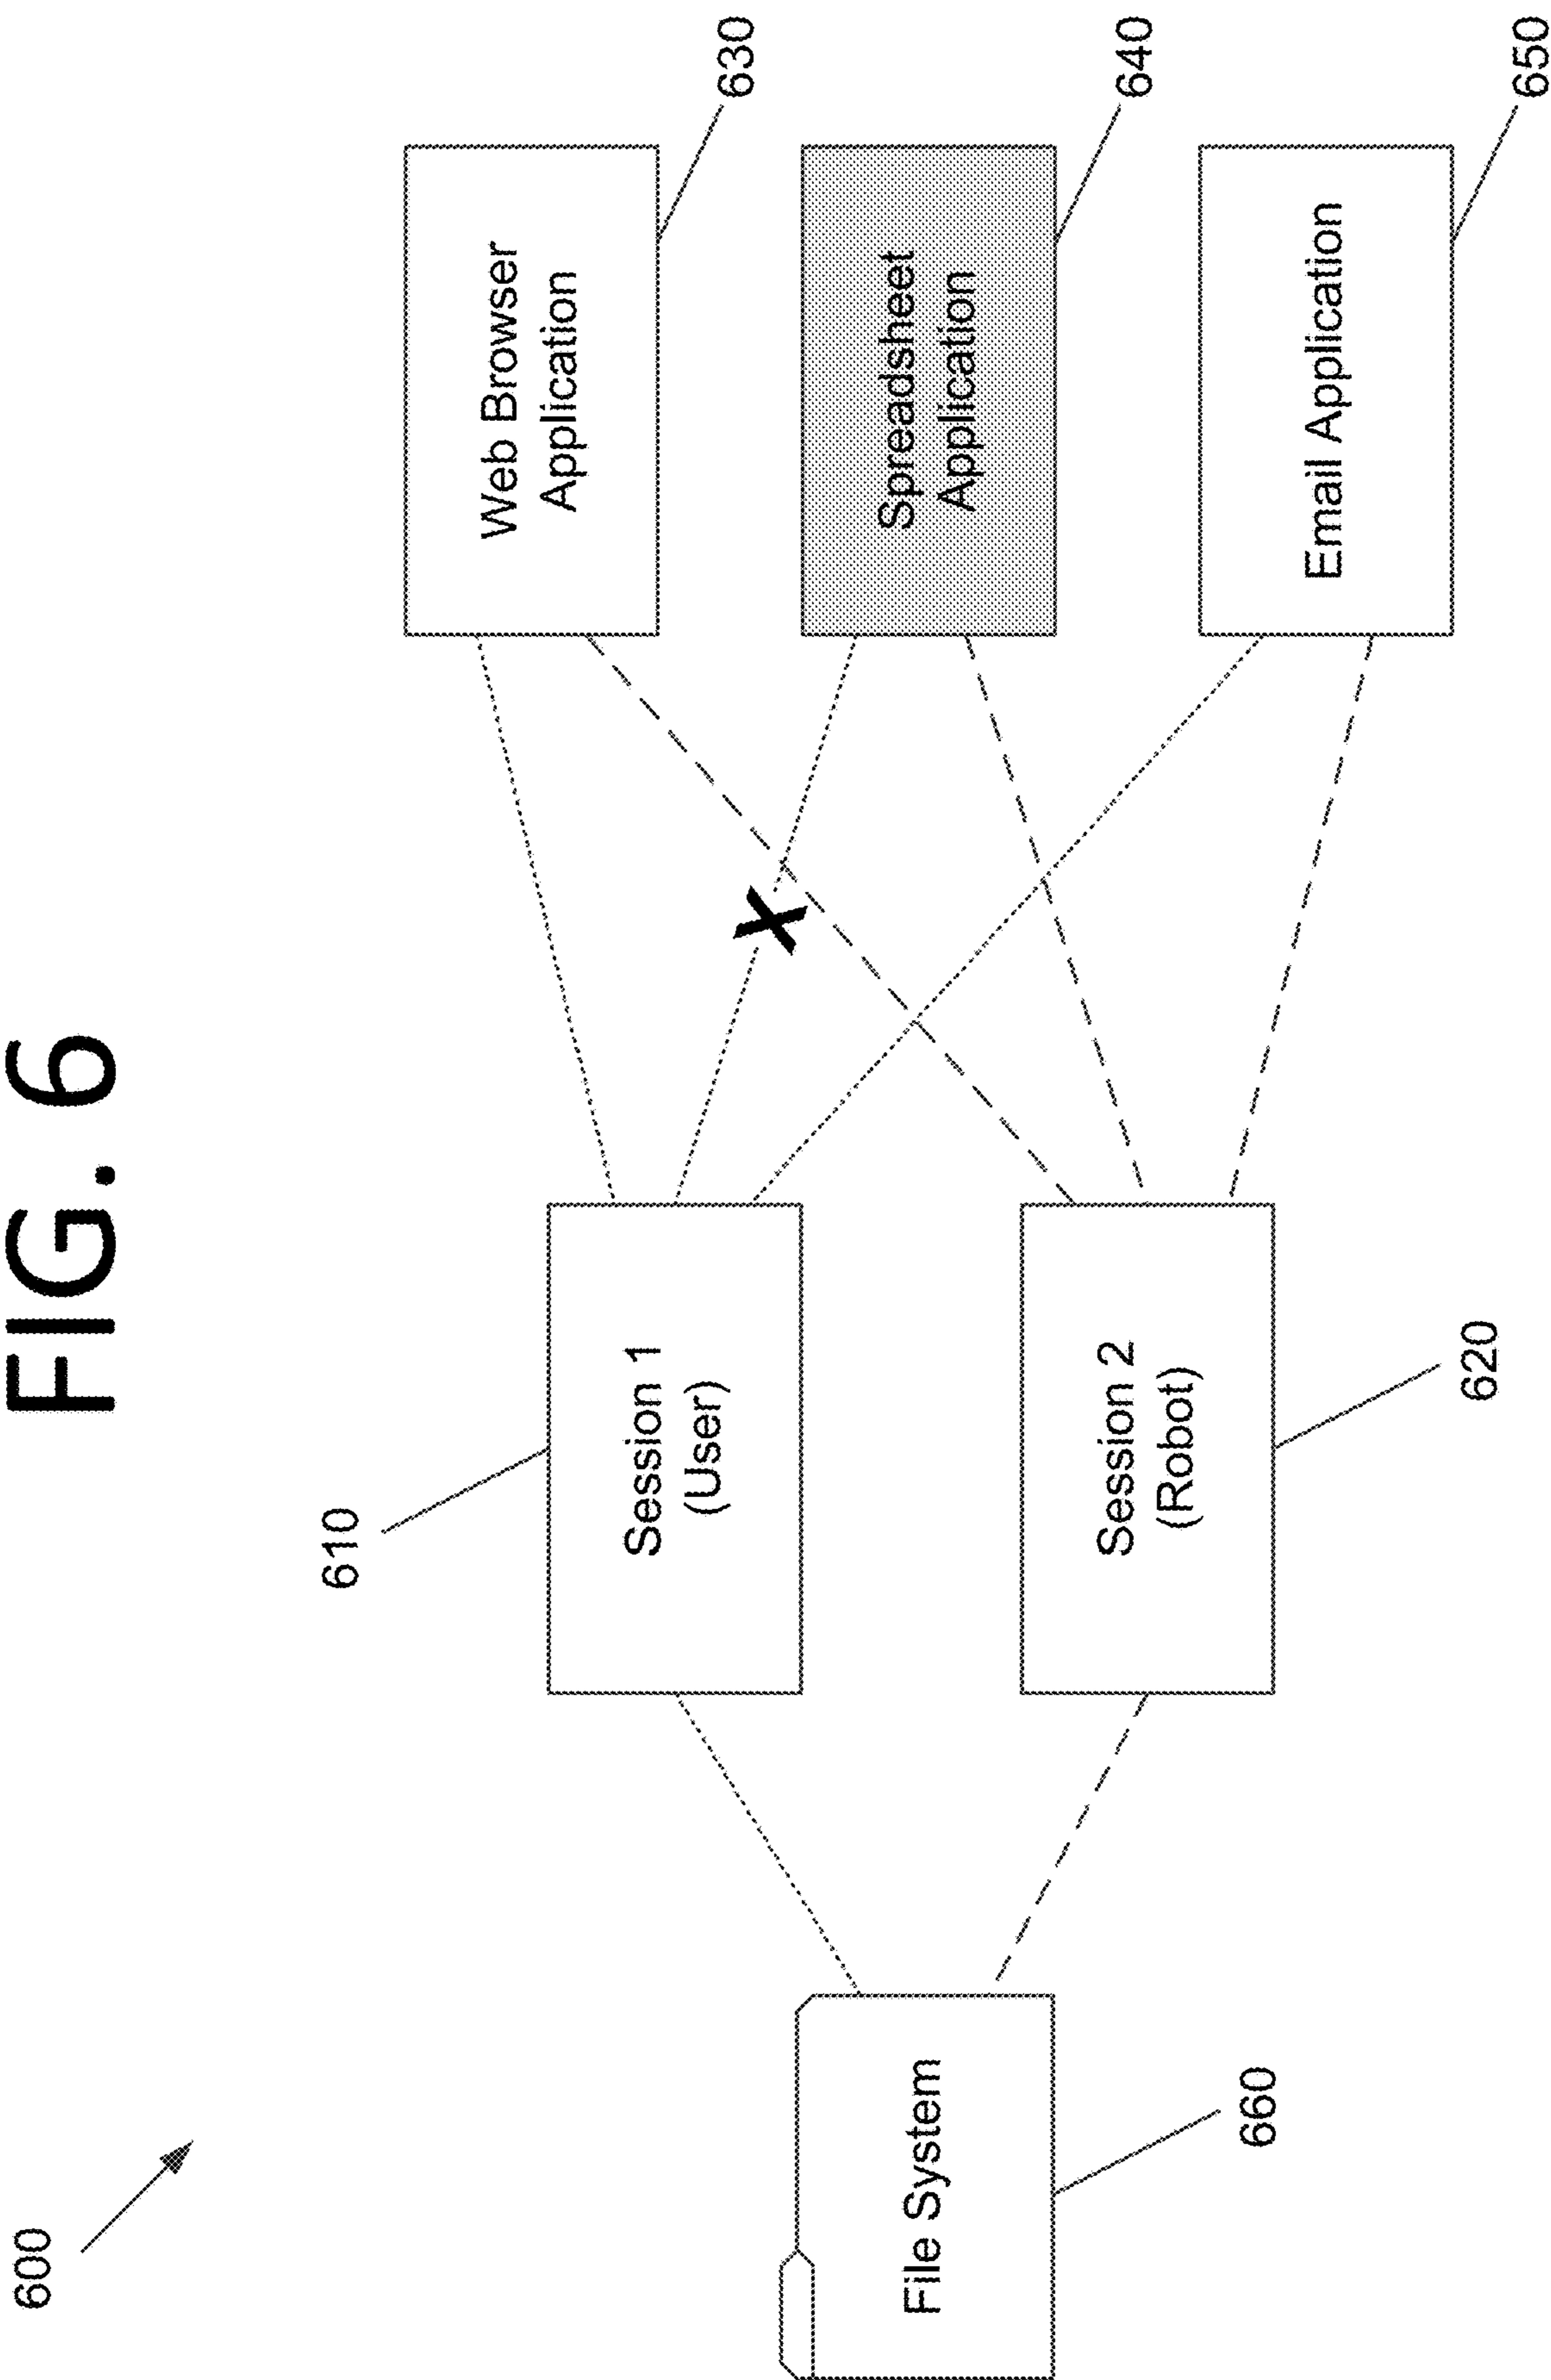**FIG. 6**


**FIG. 7A**

700 →

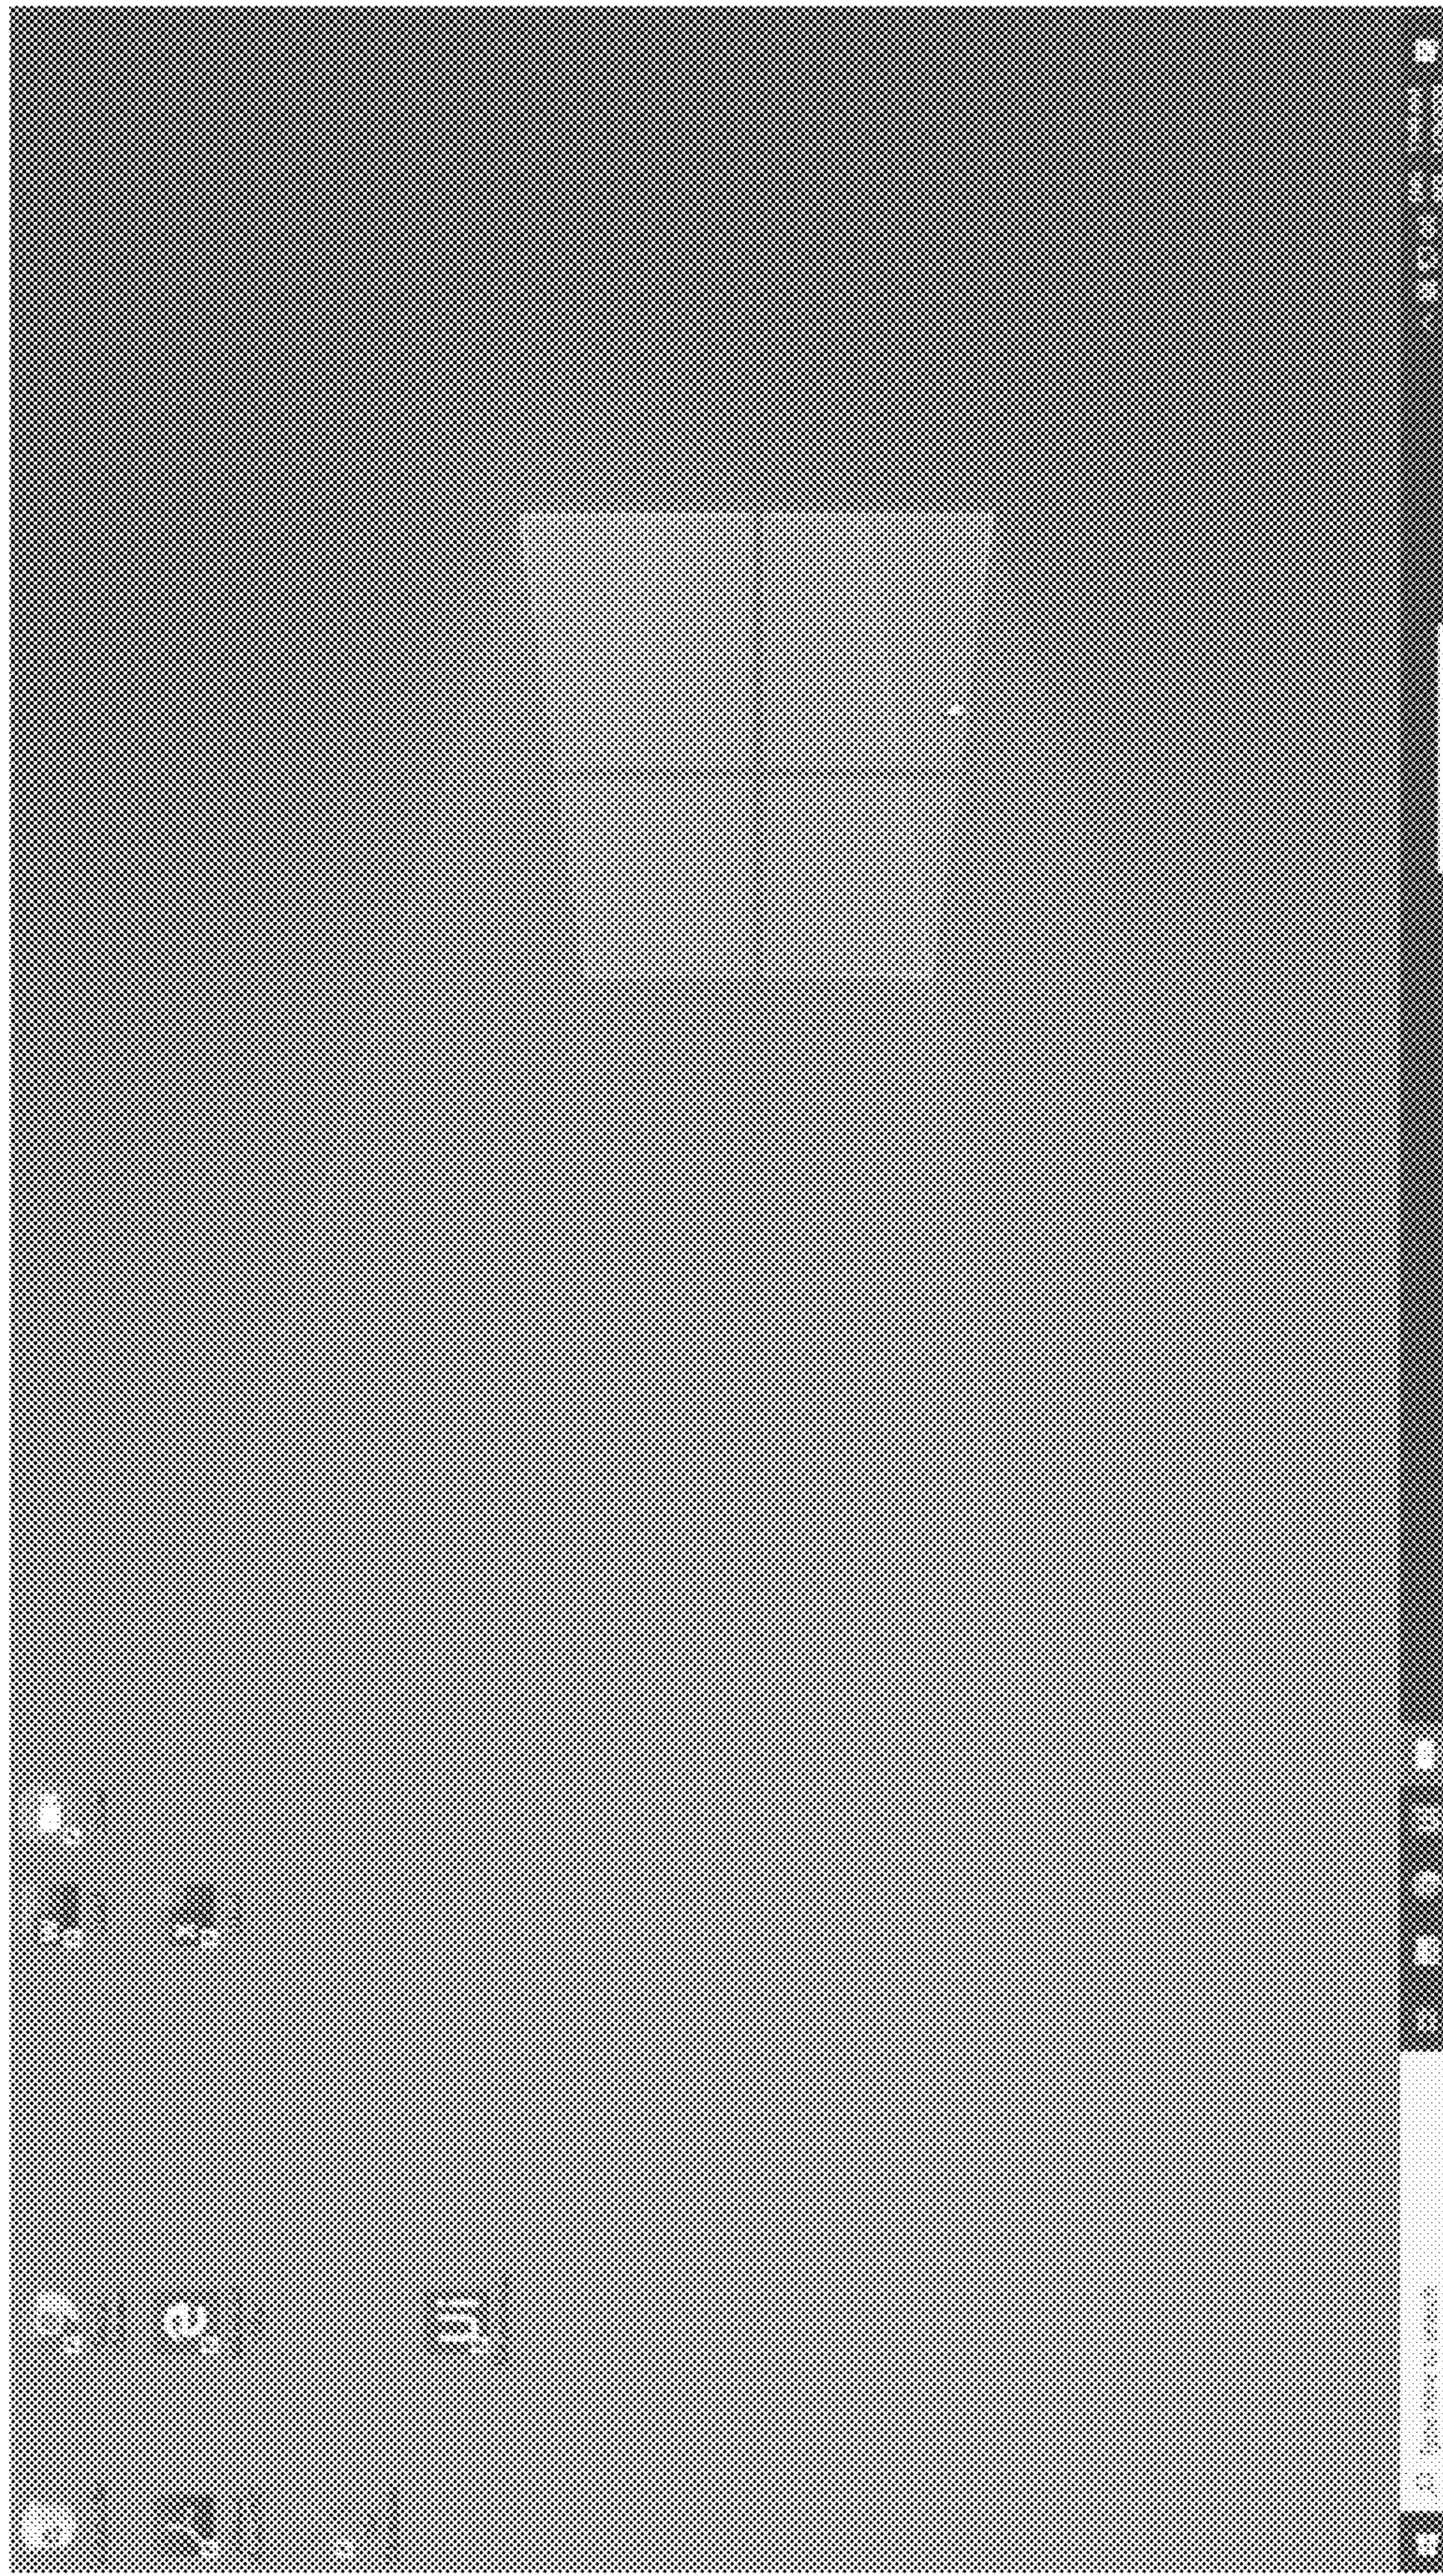


**FIG. 7B**

700 →

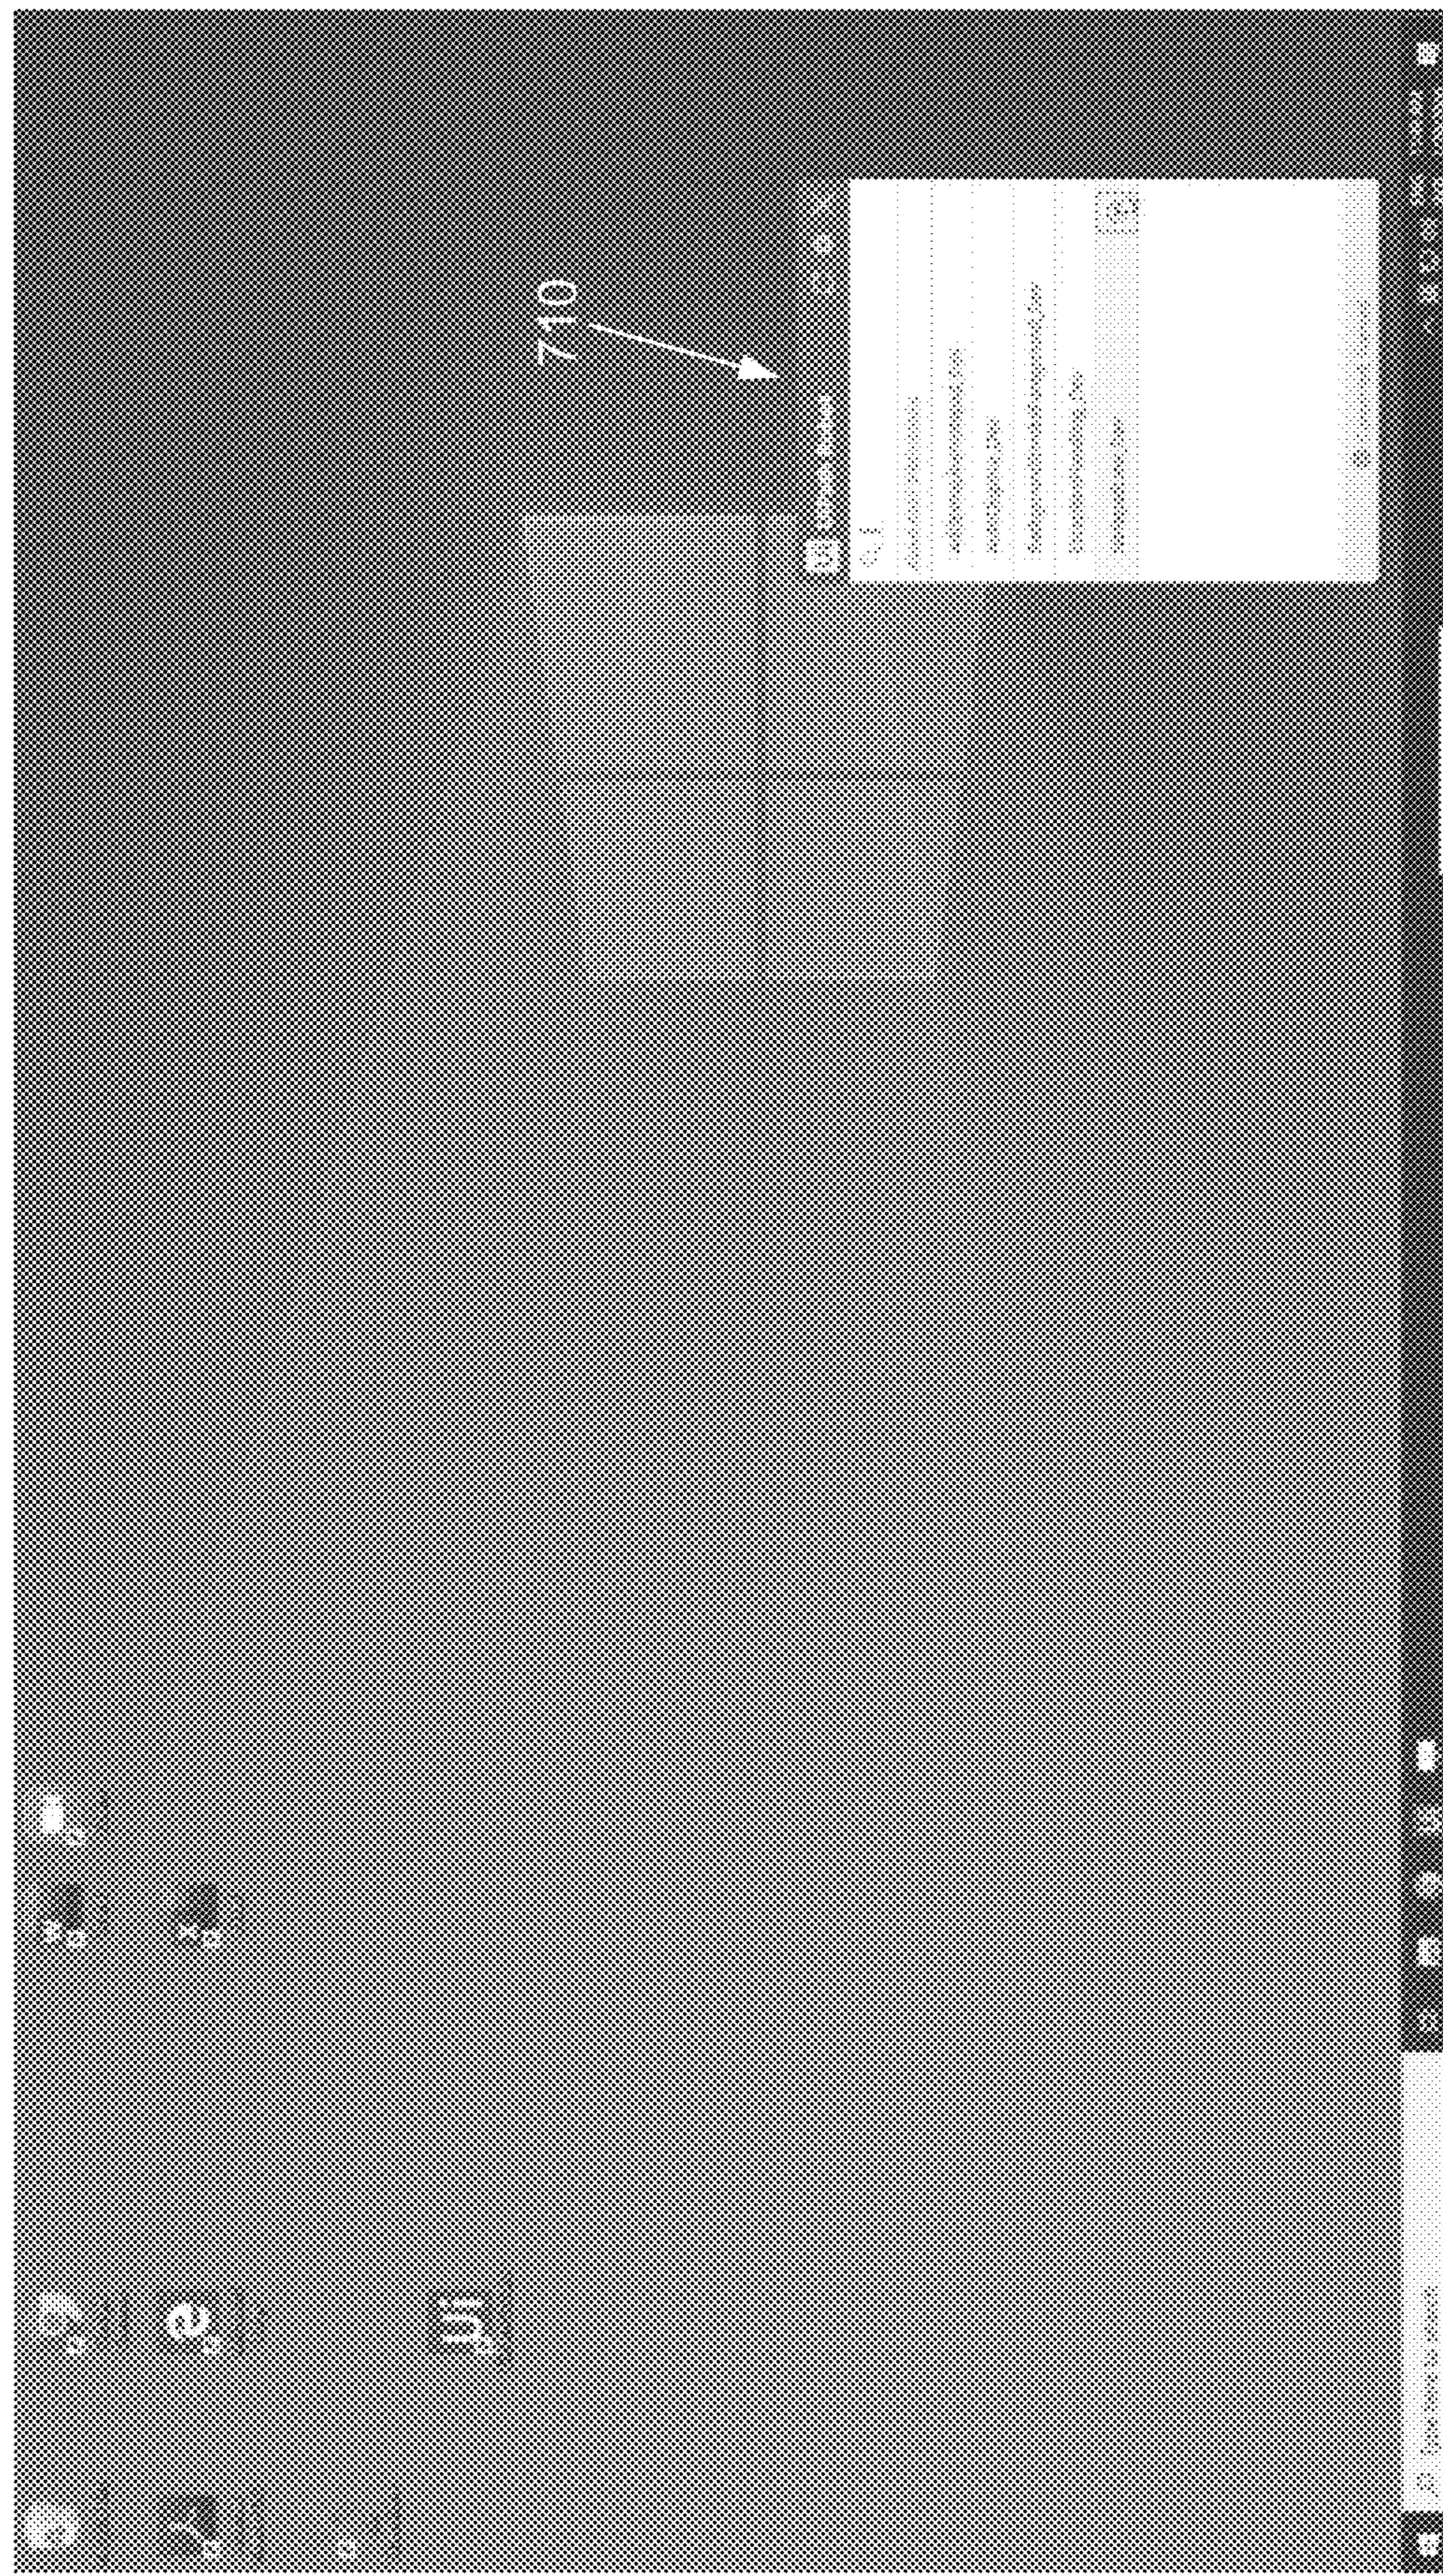


**FIG. 7C**


700 →

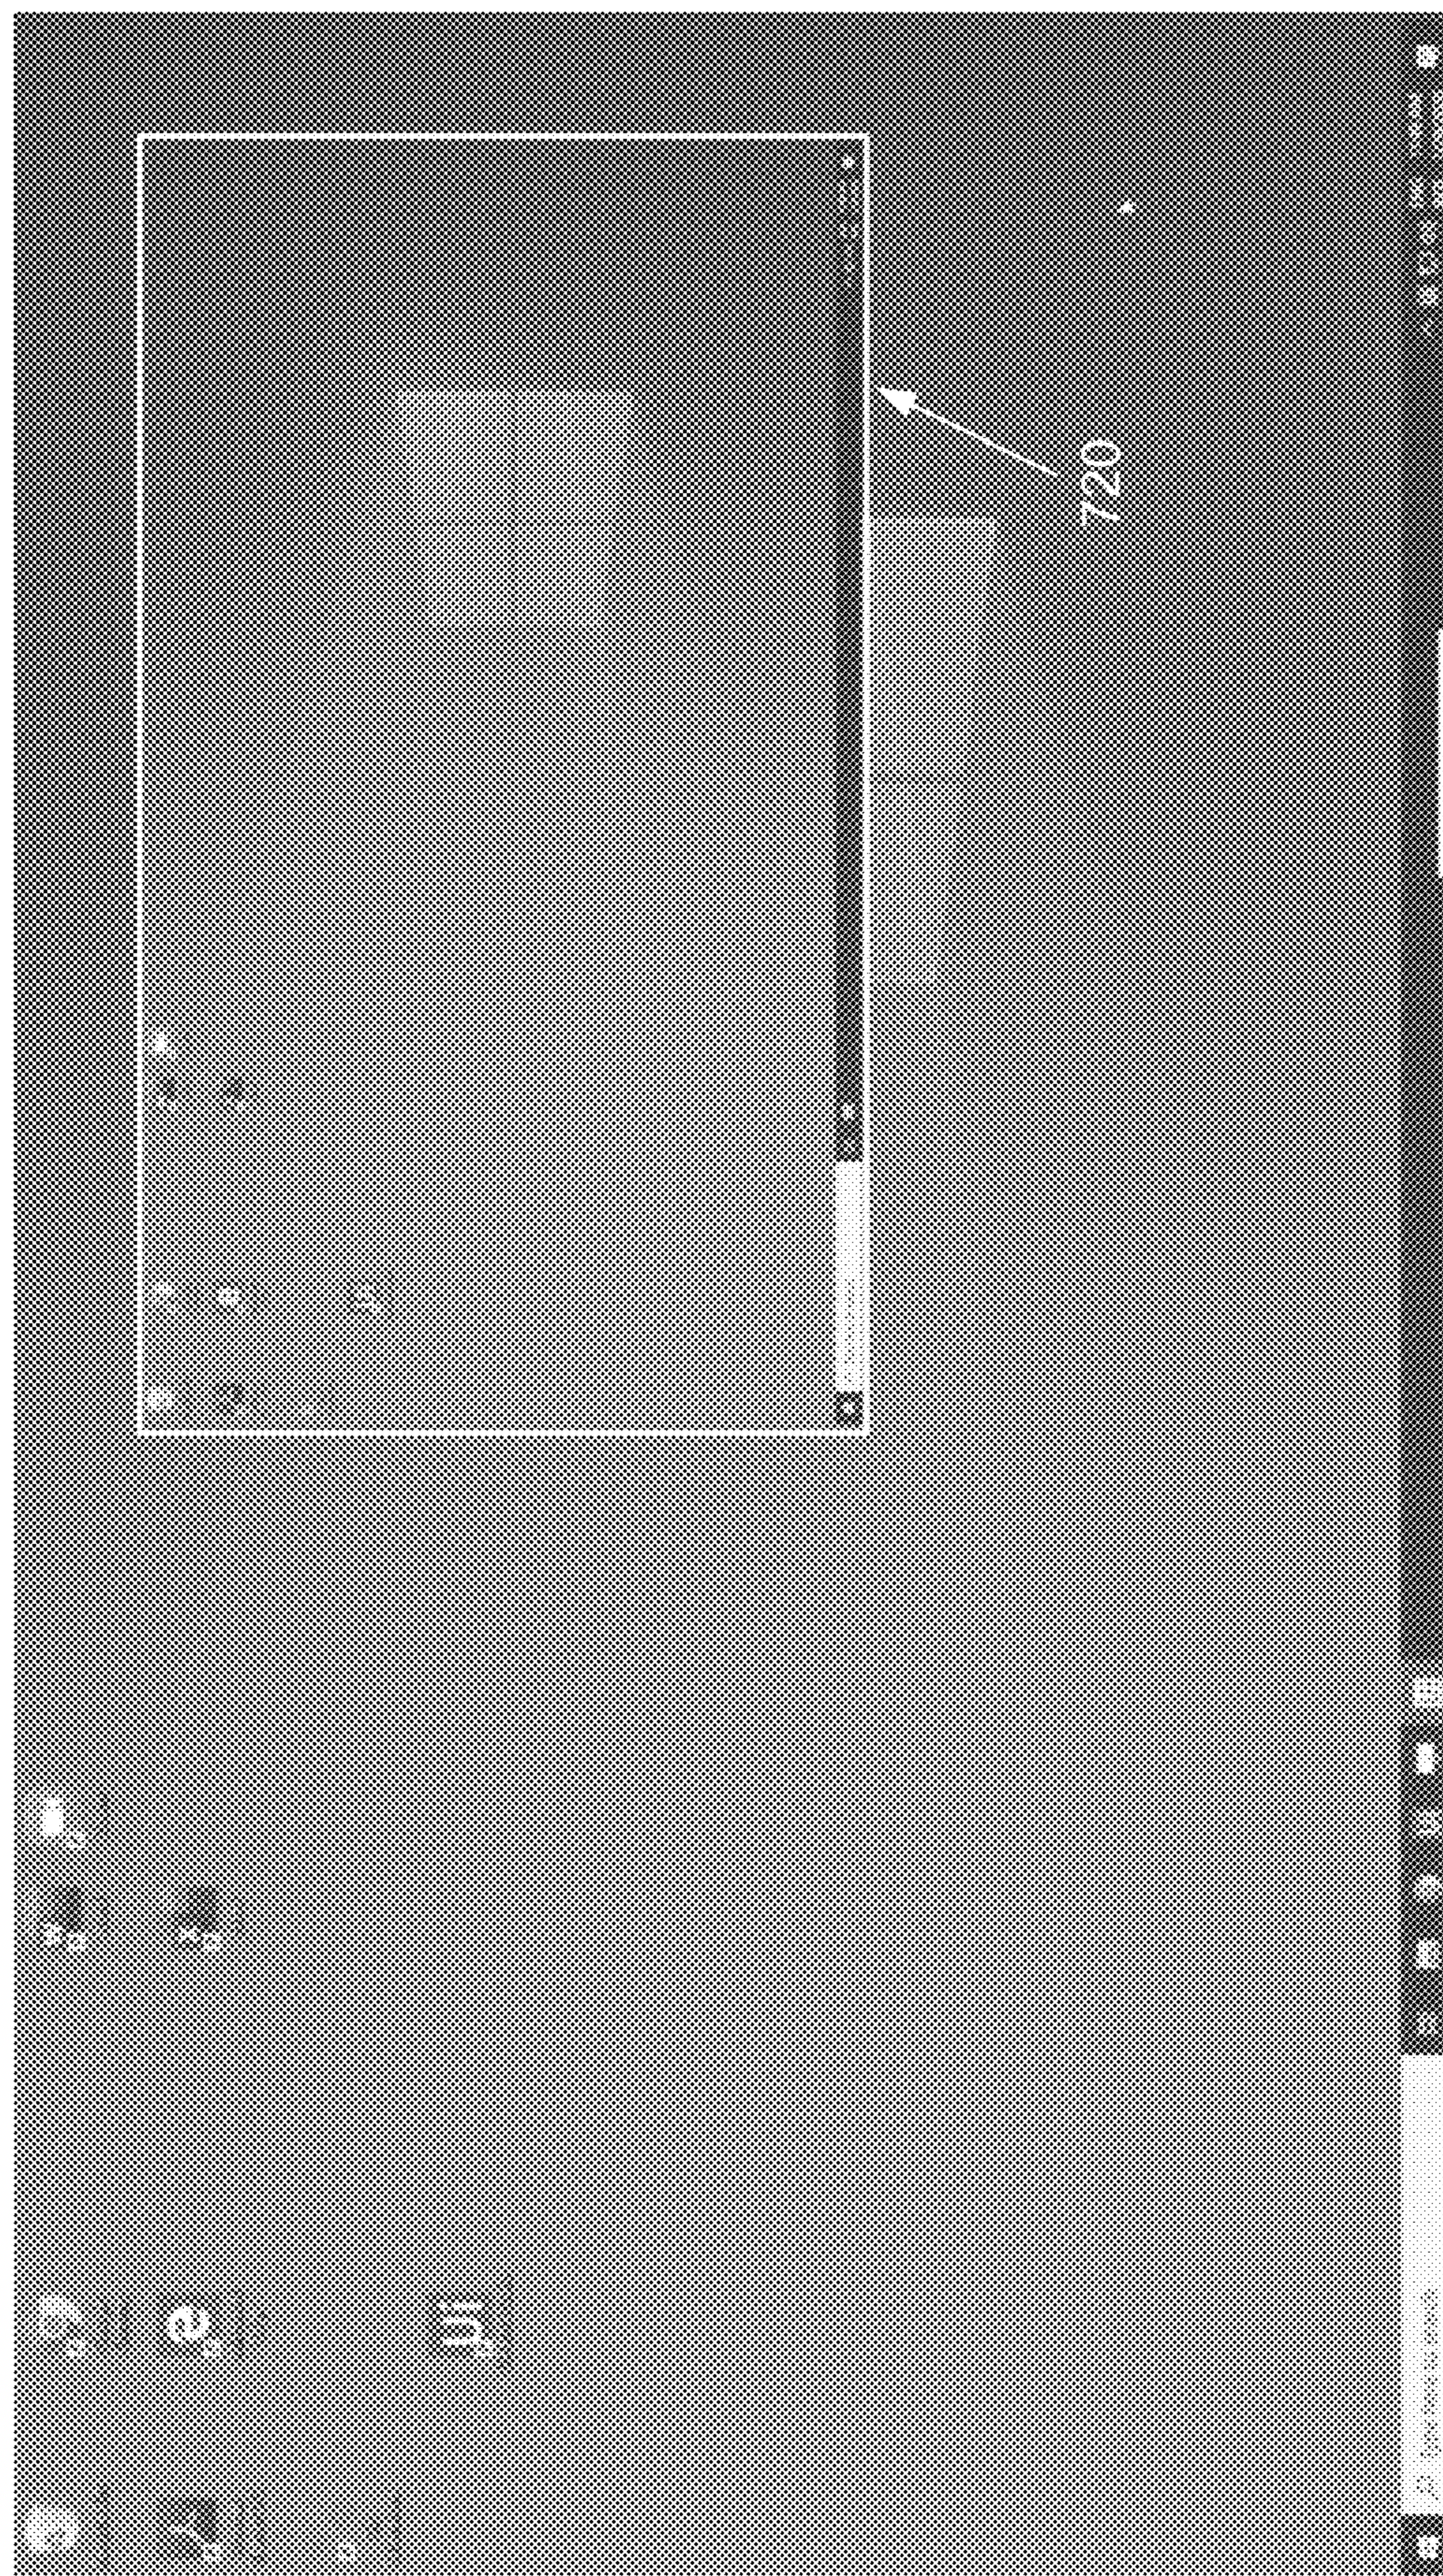

**FIG. 7D**


700 →

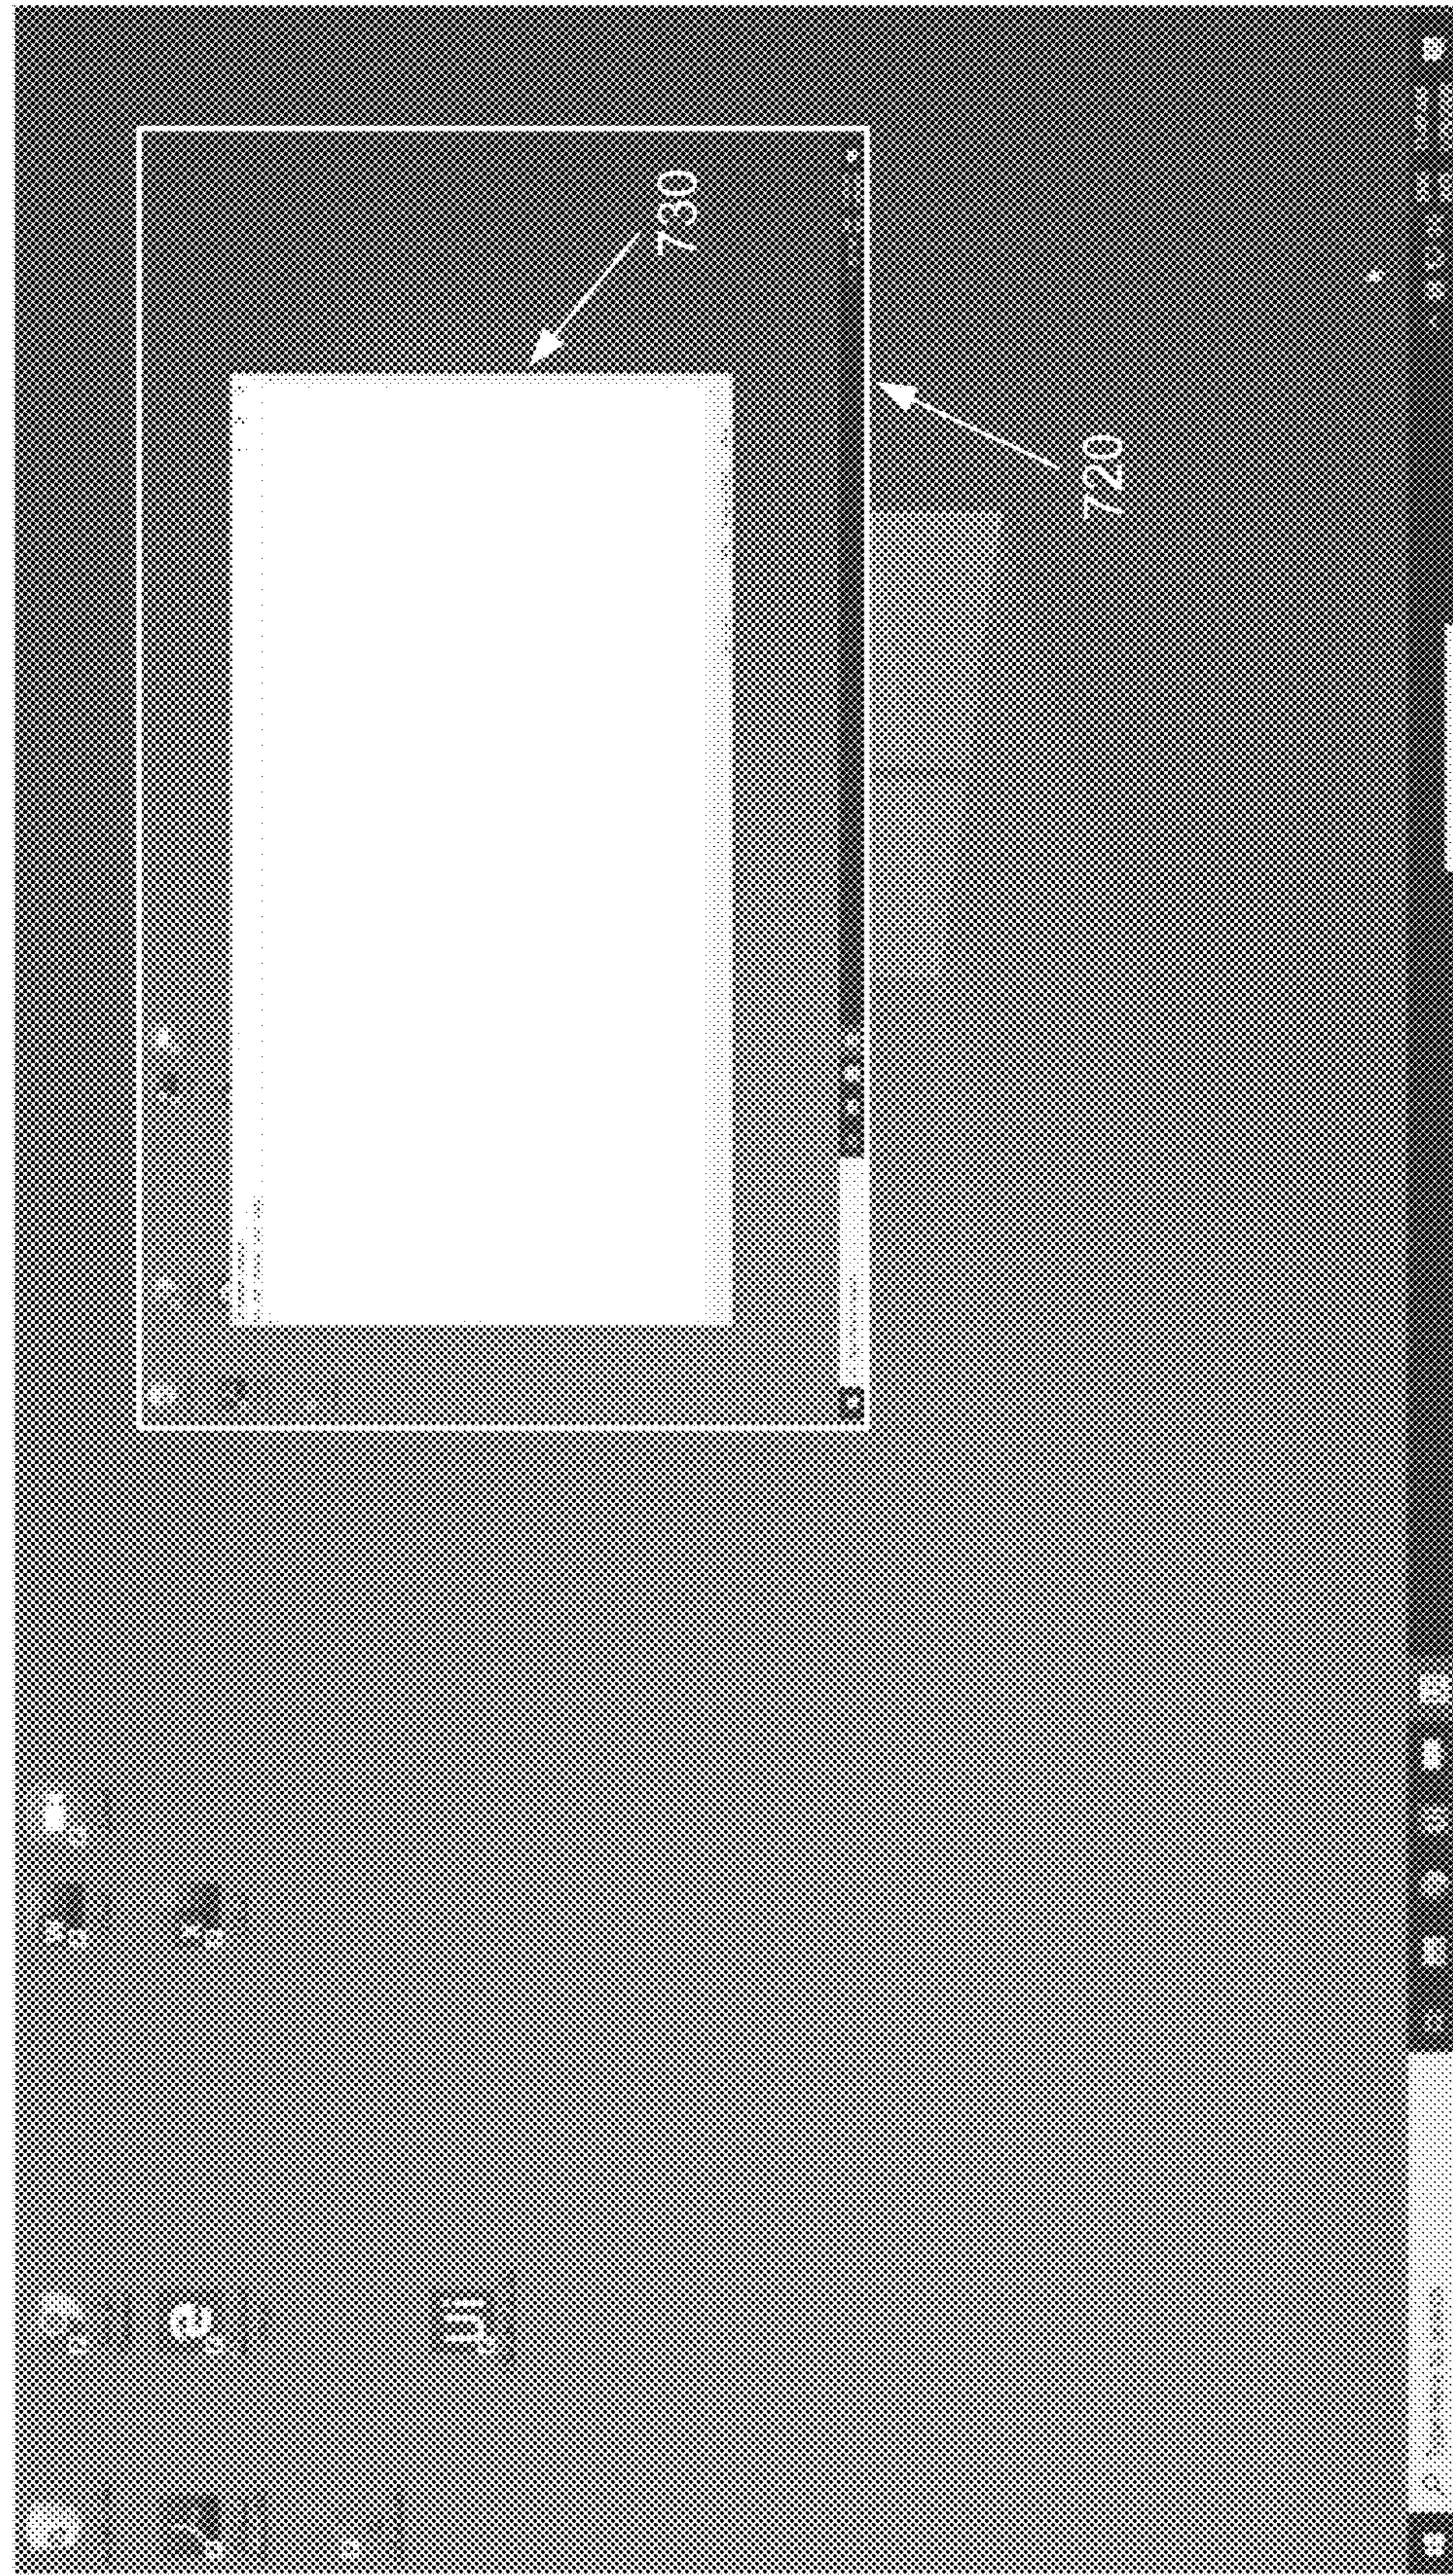

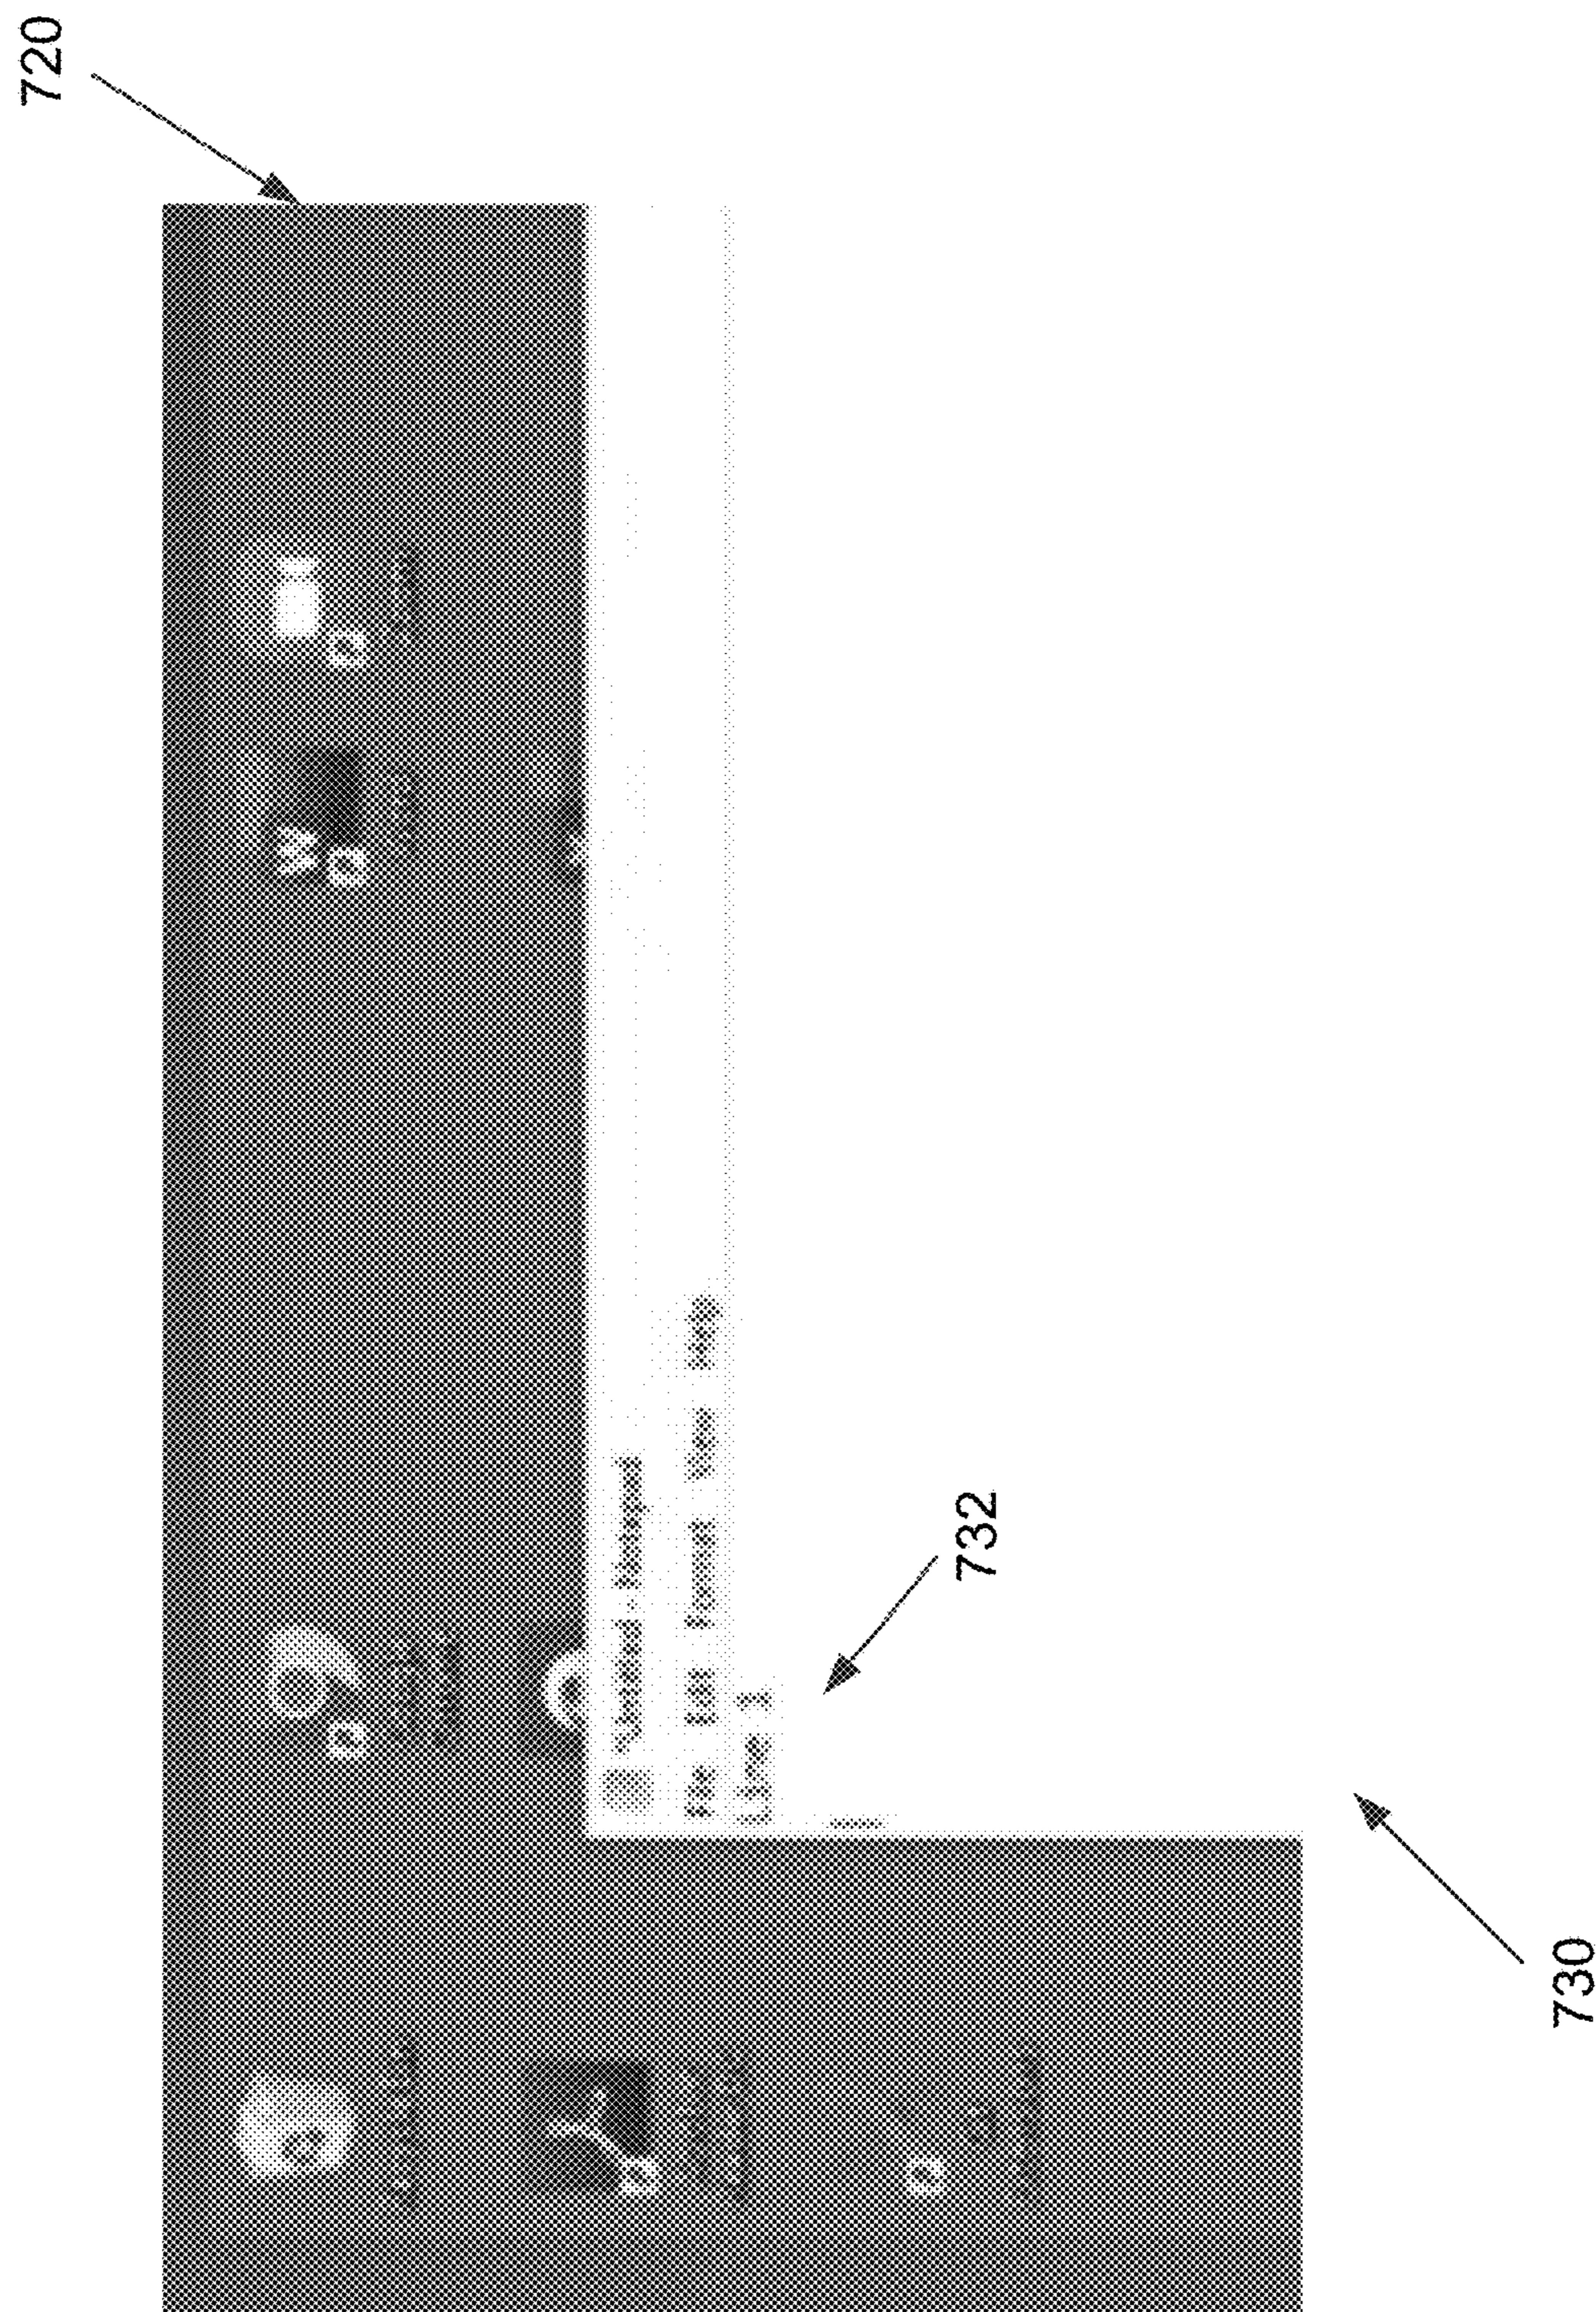**FIG. 7E**


**FIG. 7F**

700

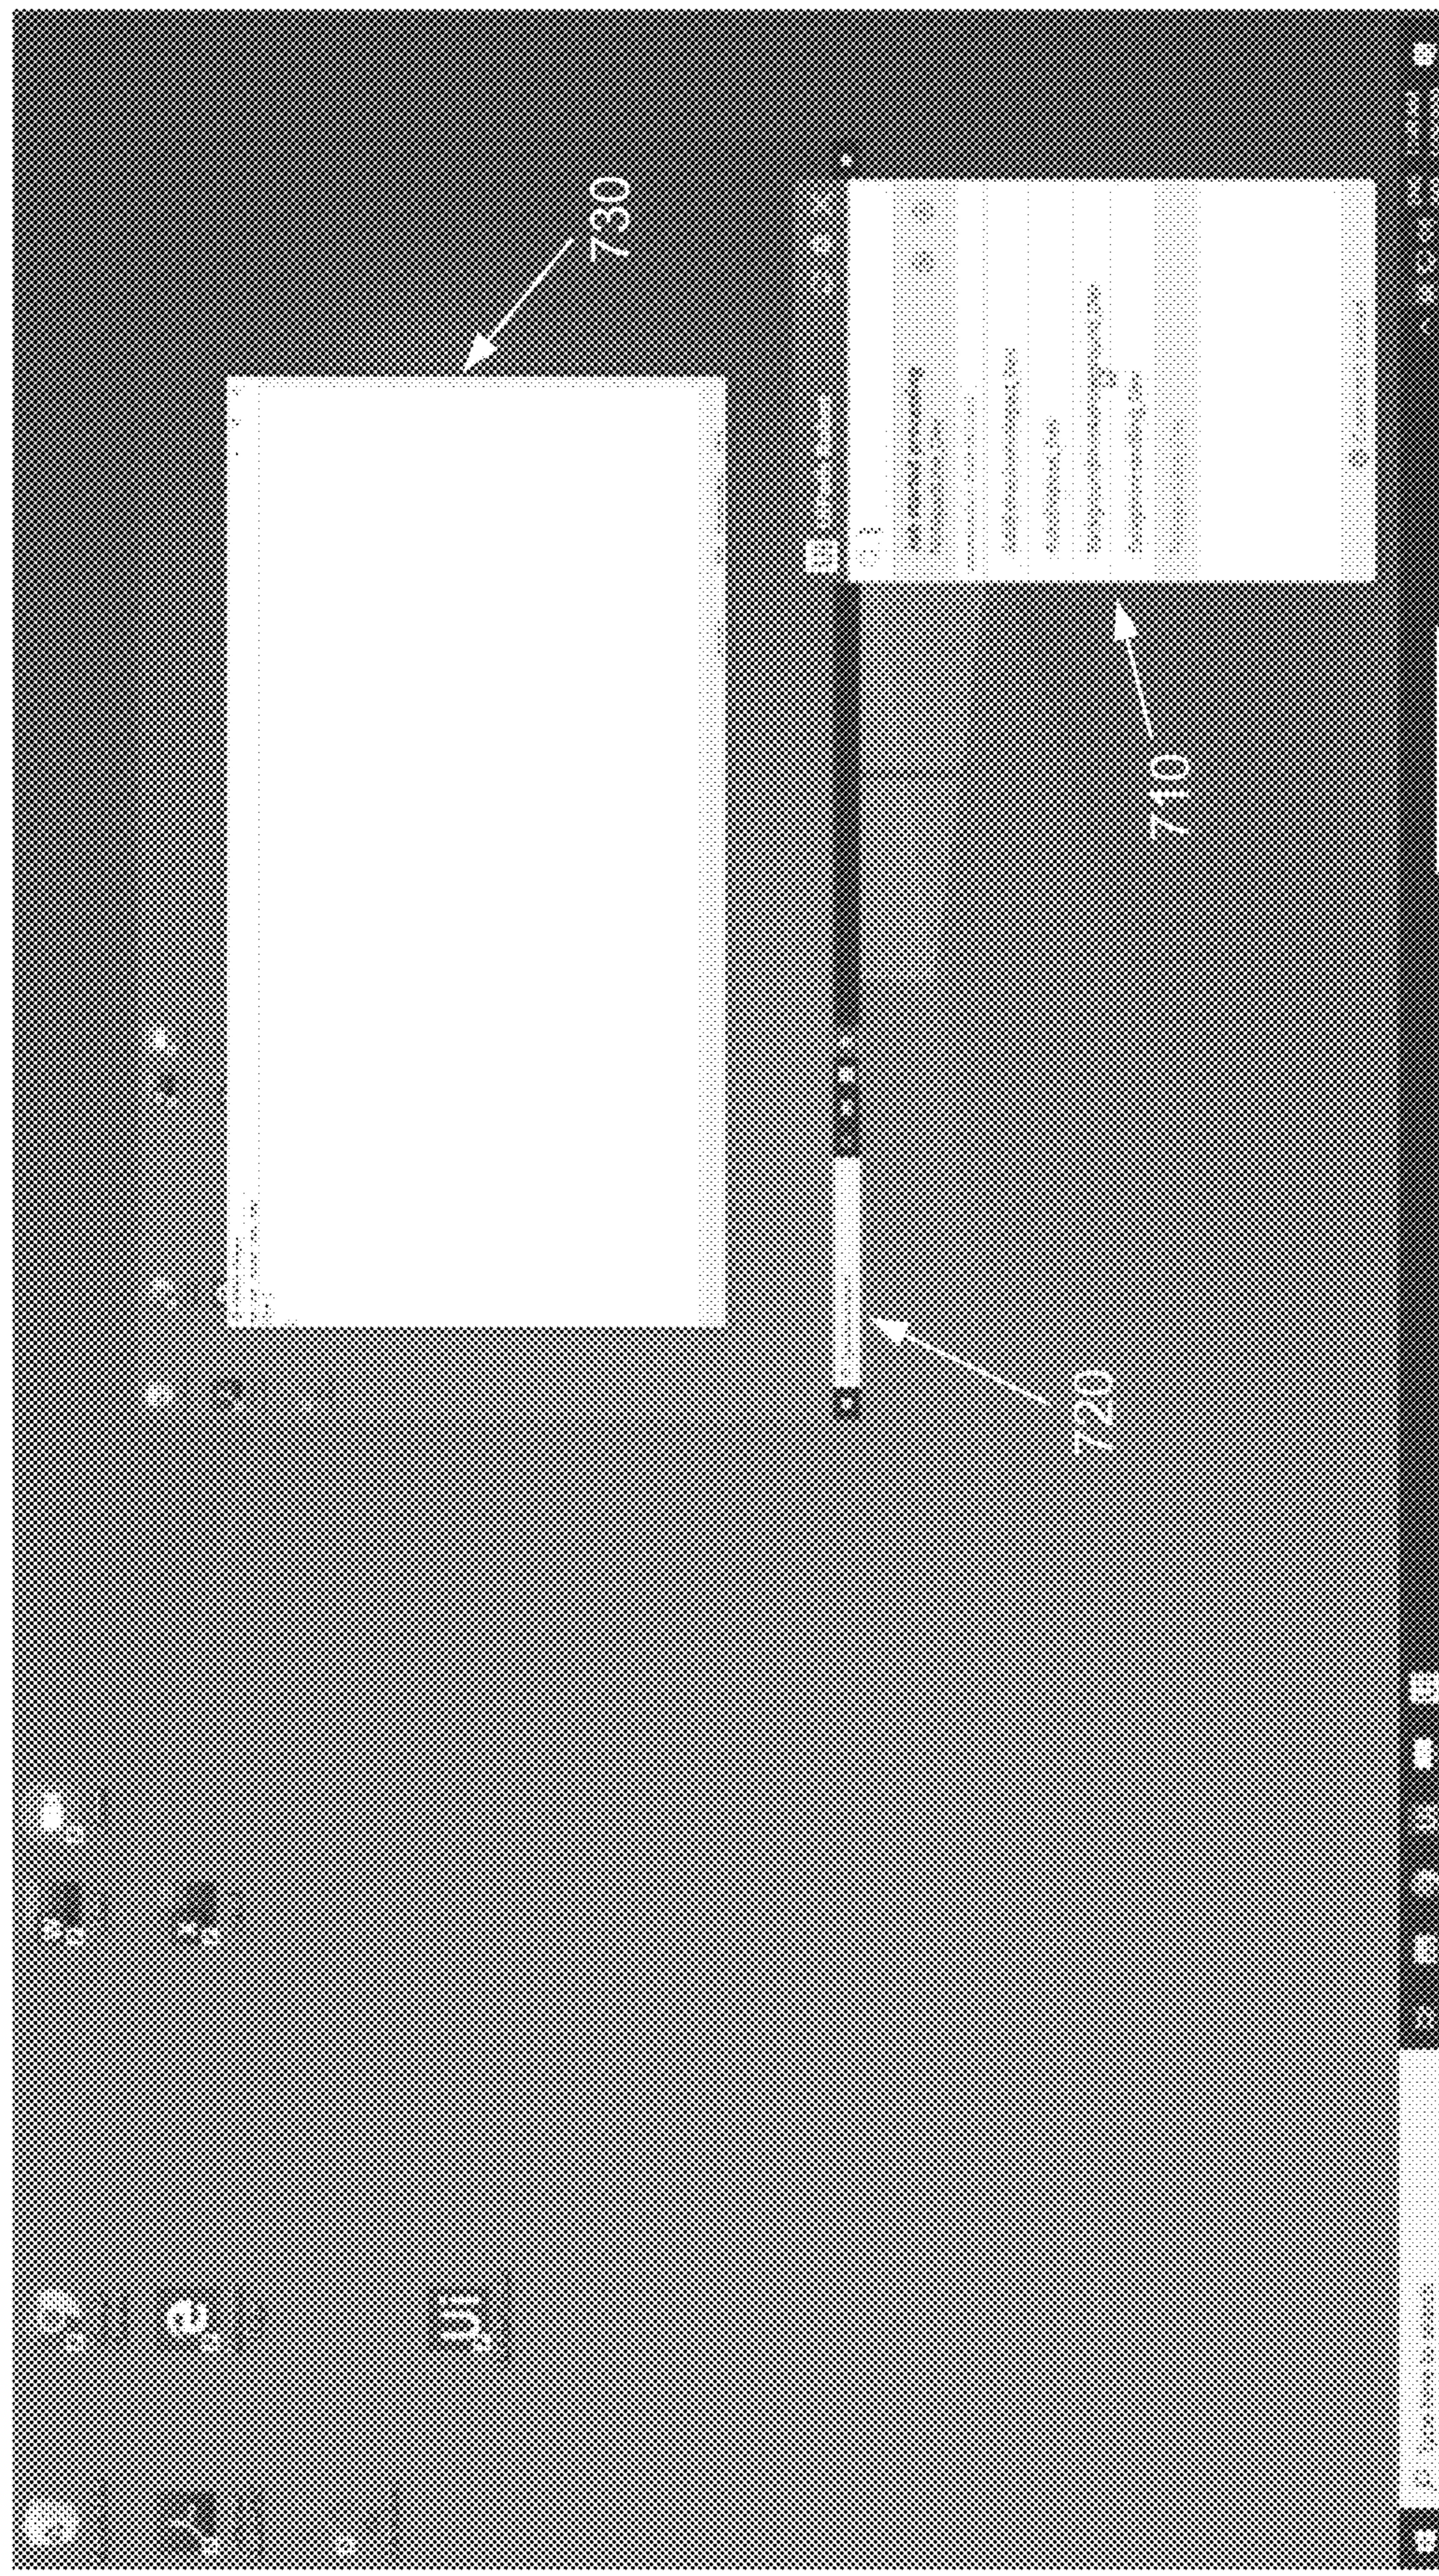


**FIG. 7G**


700

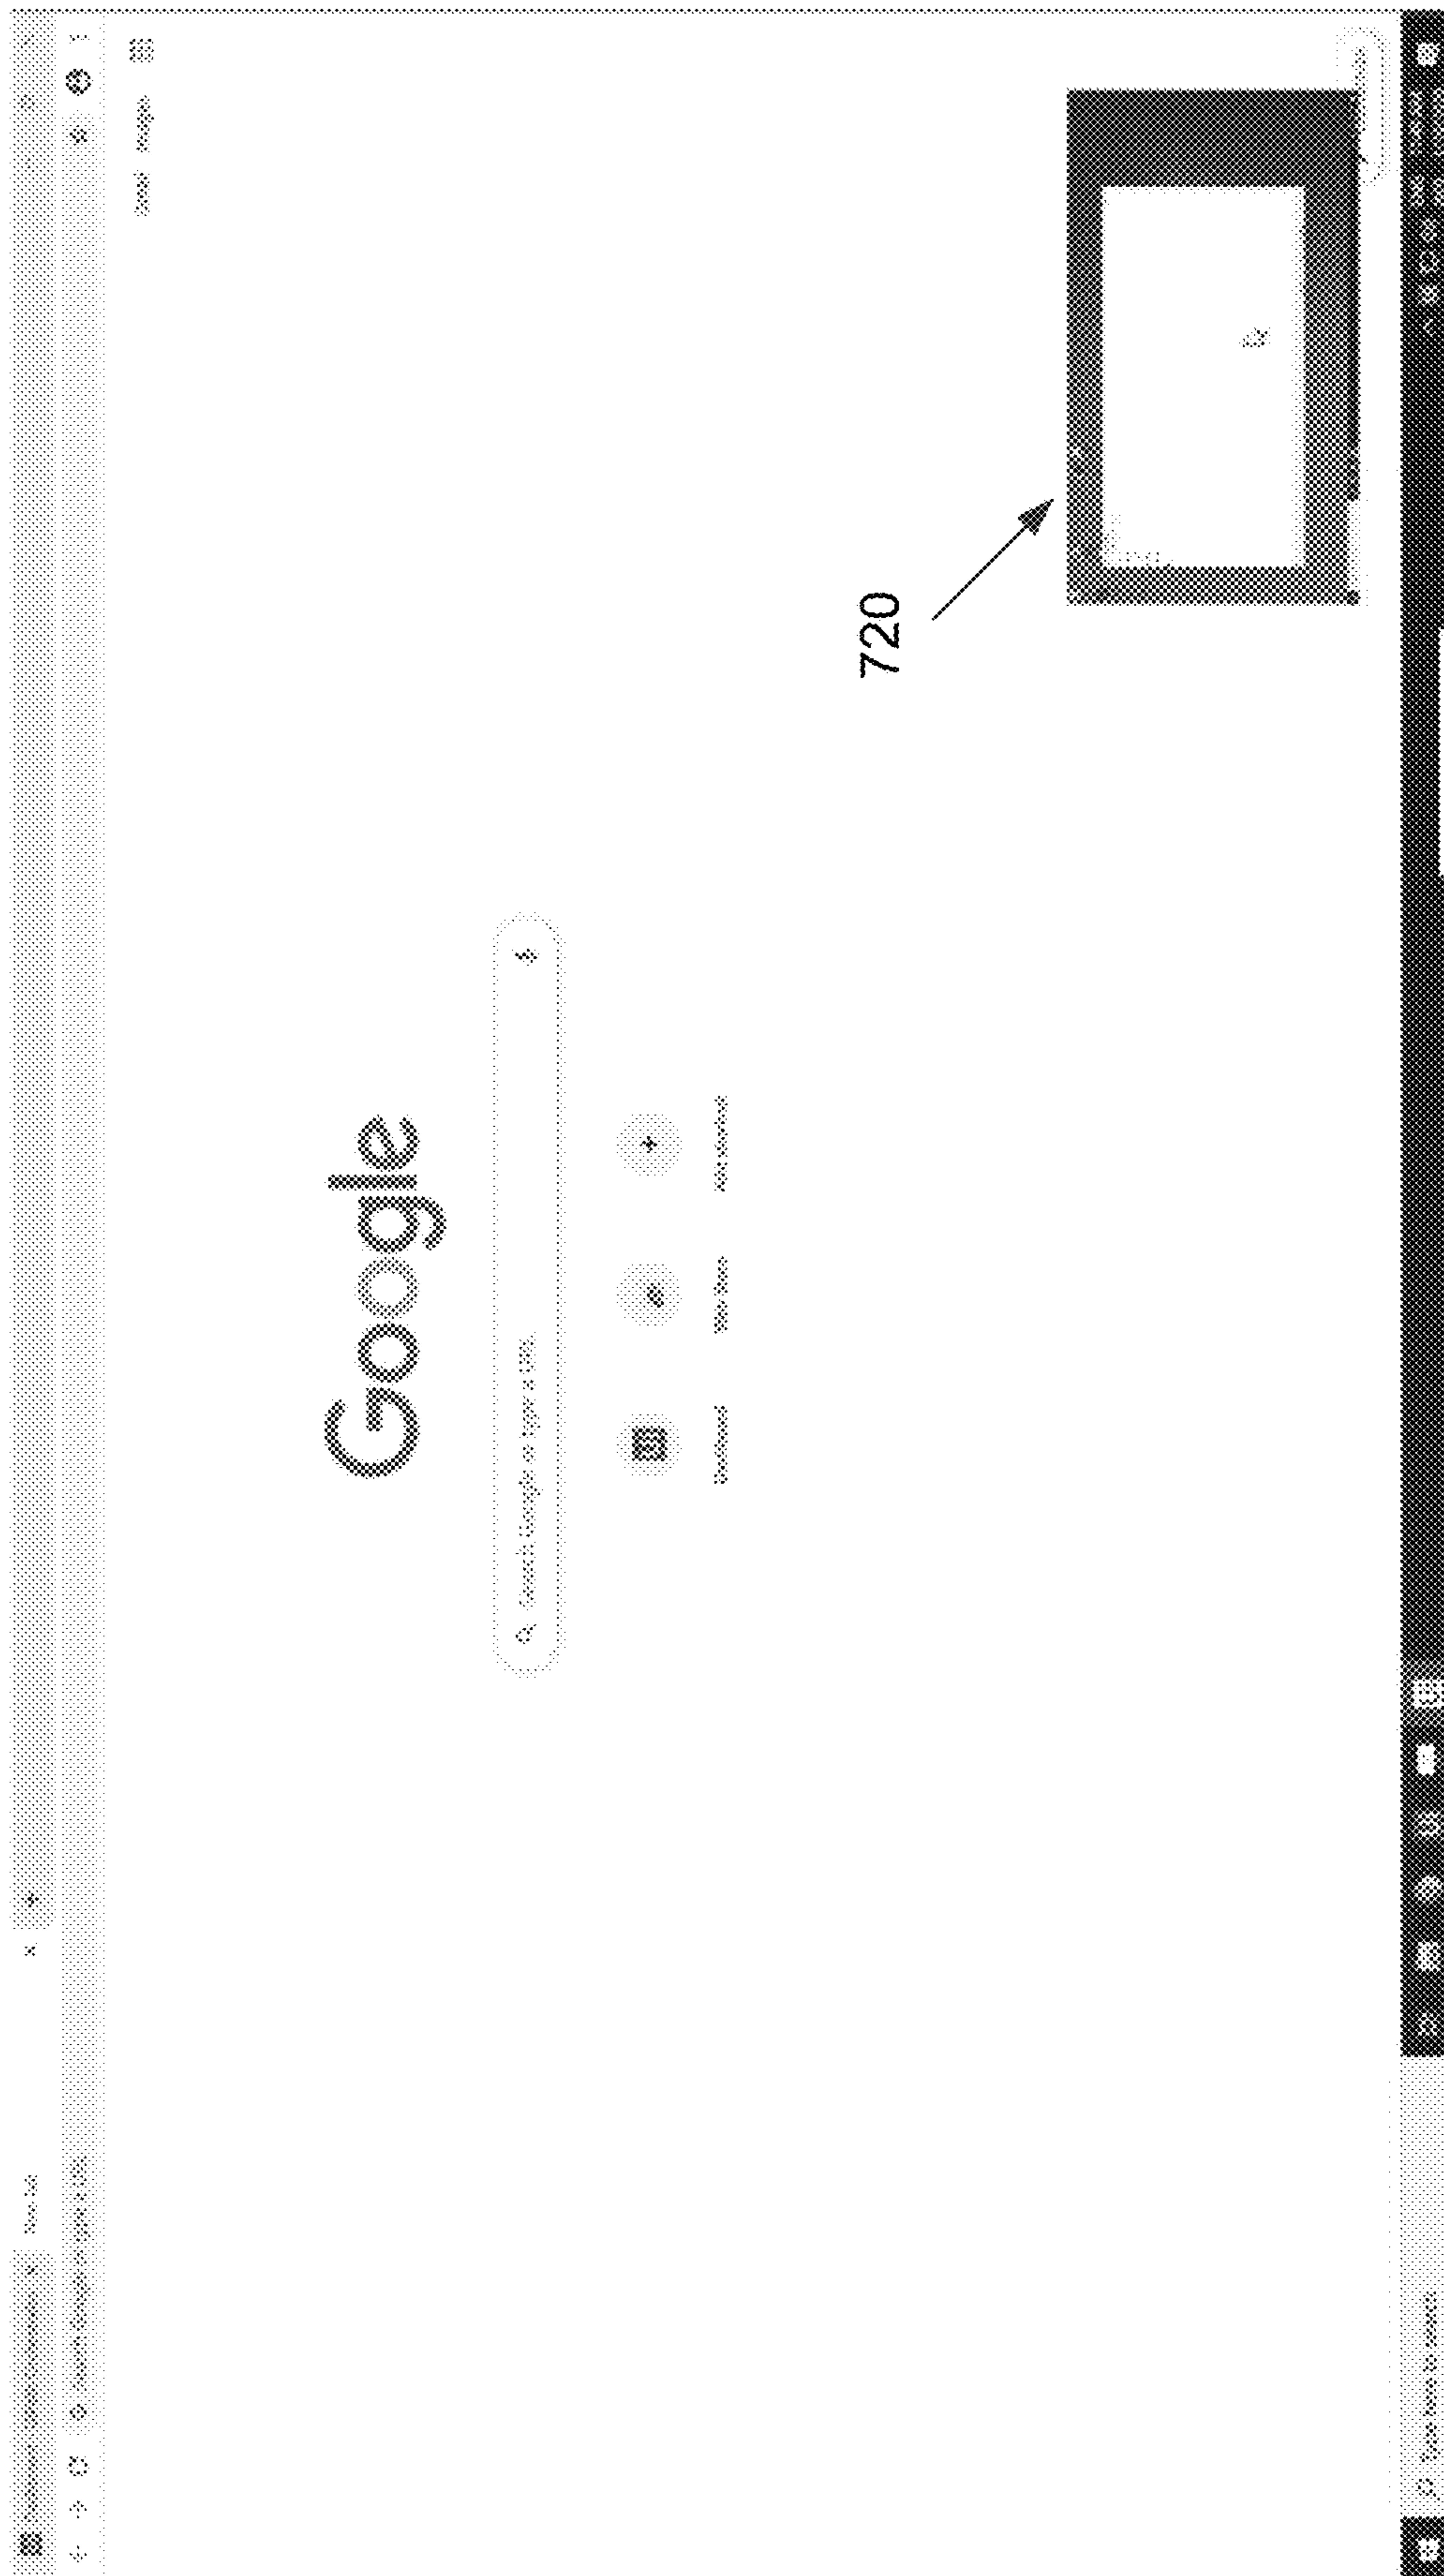

工  
厂  
大  
公  
司


700

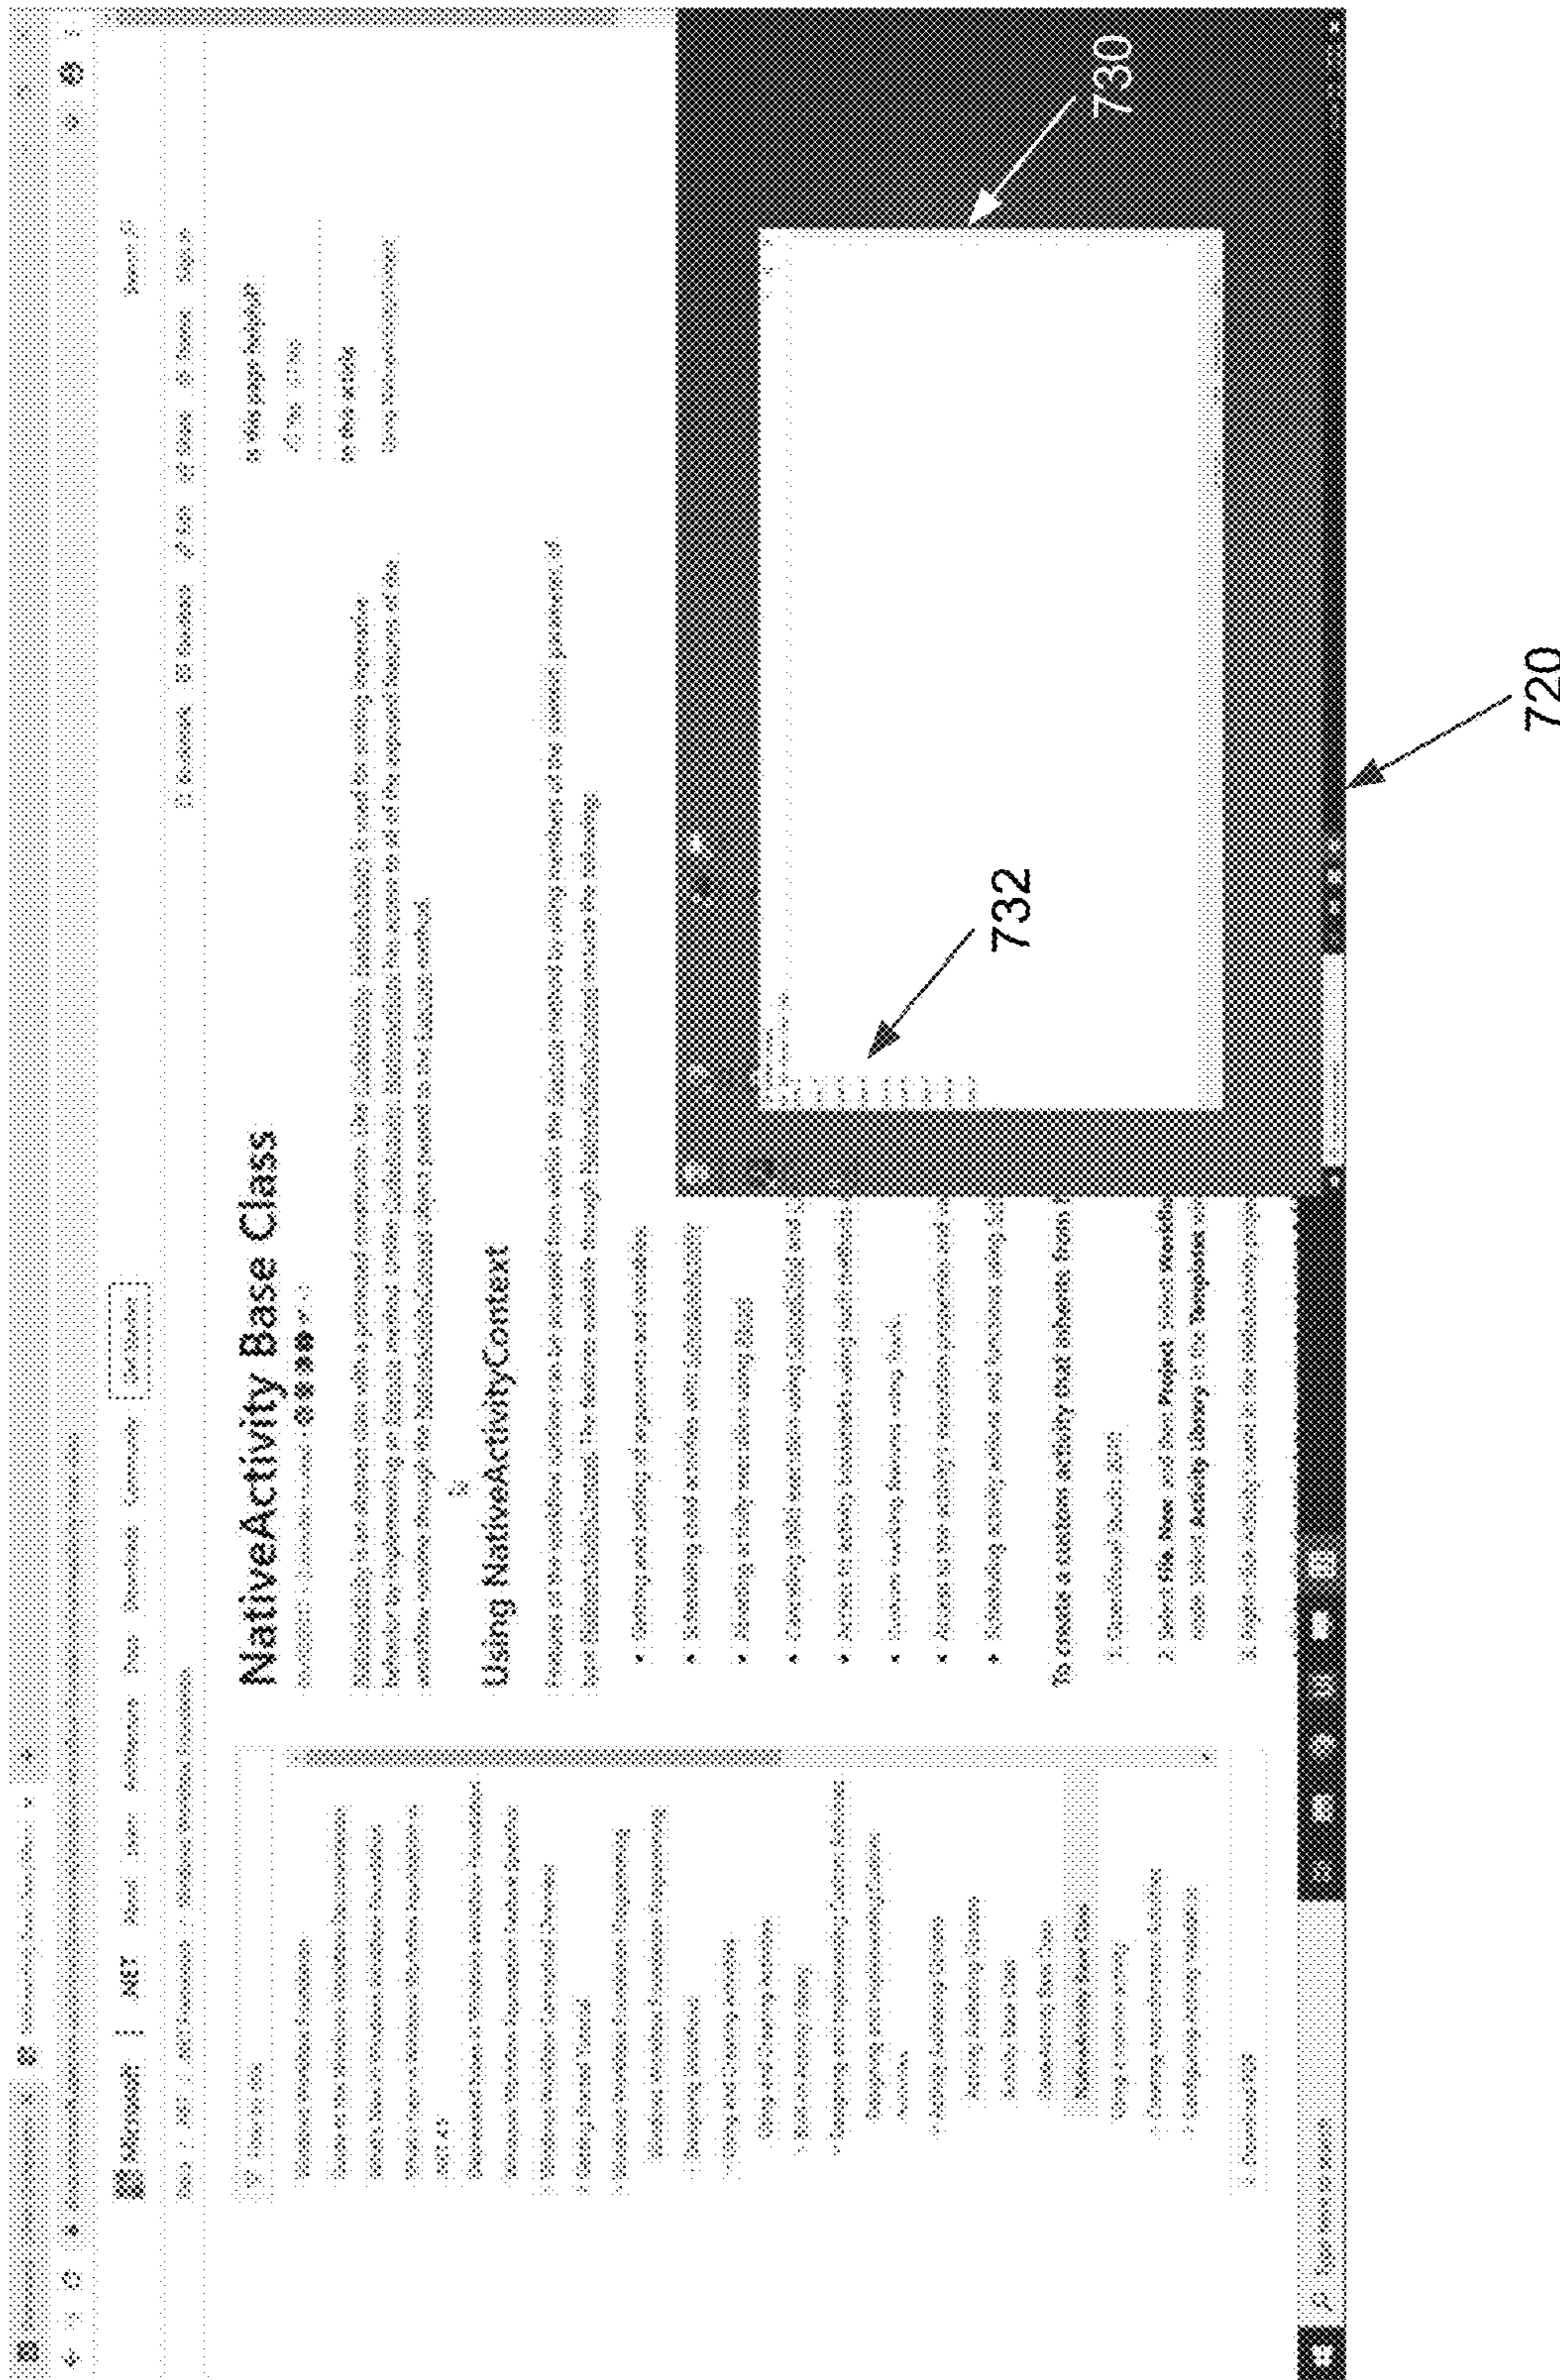

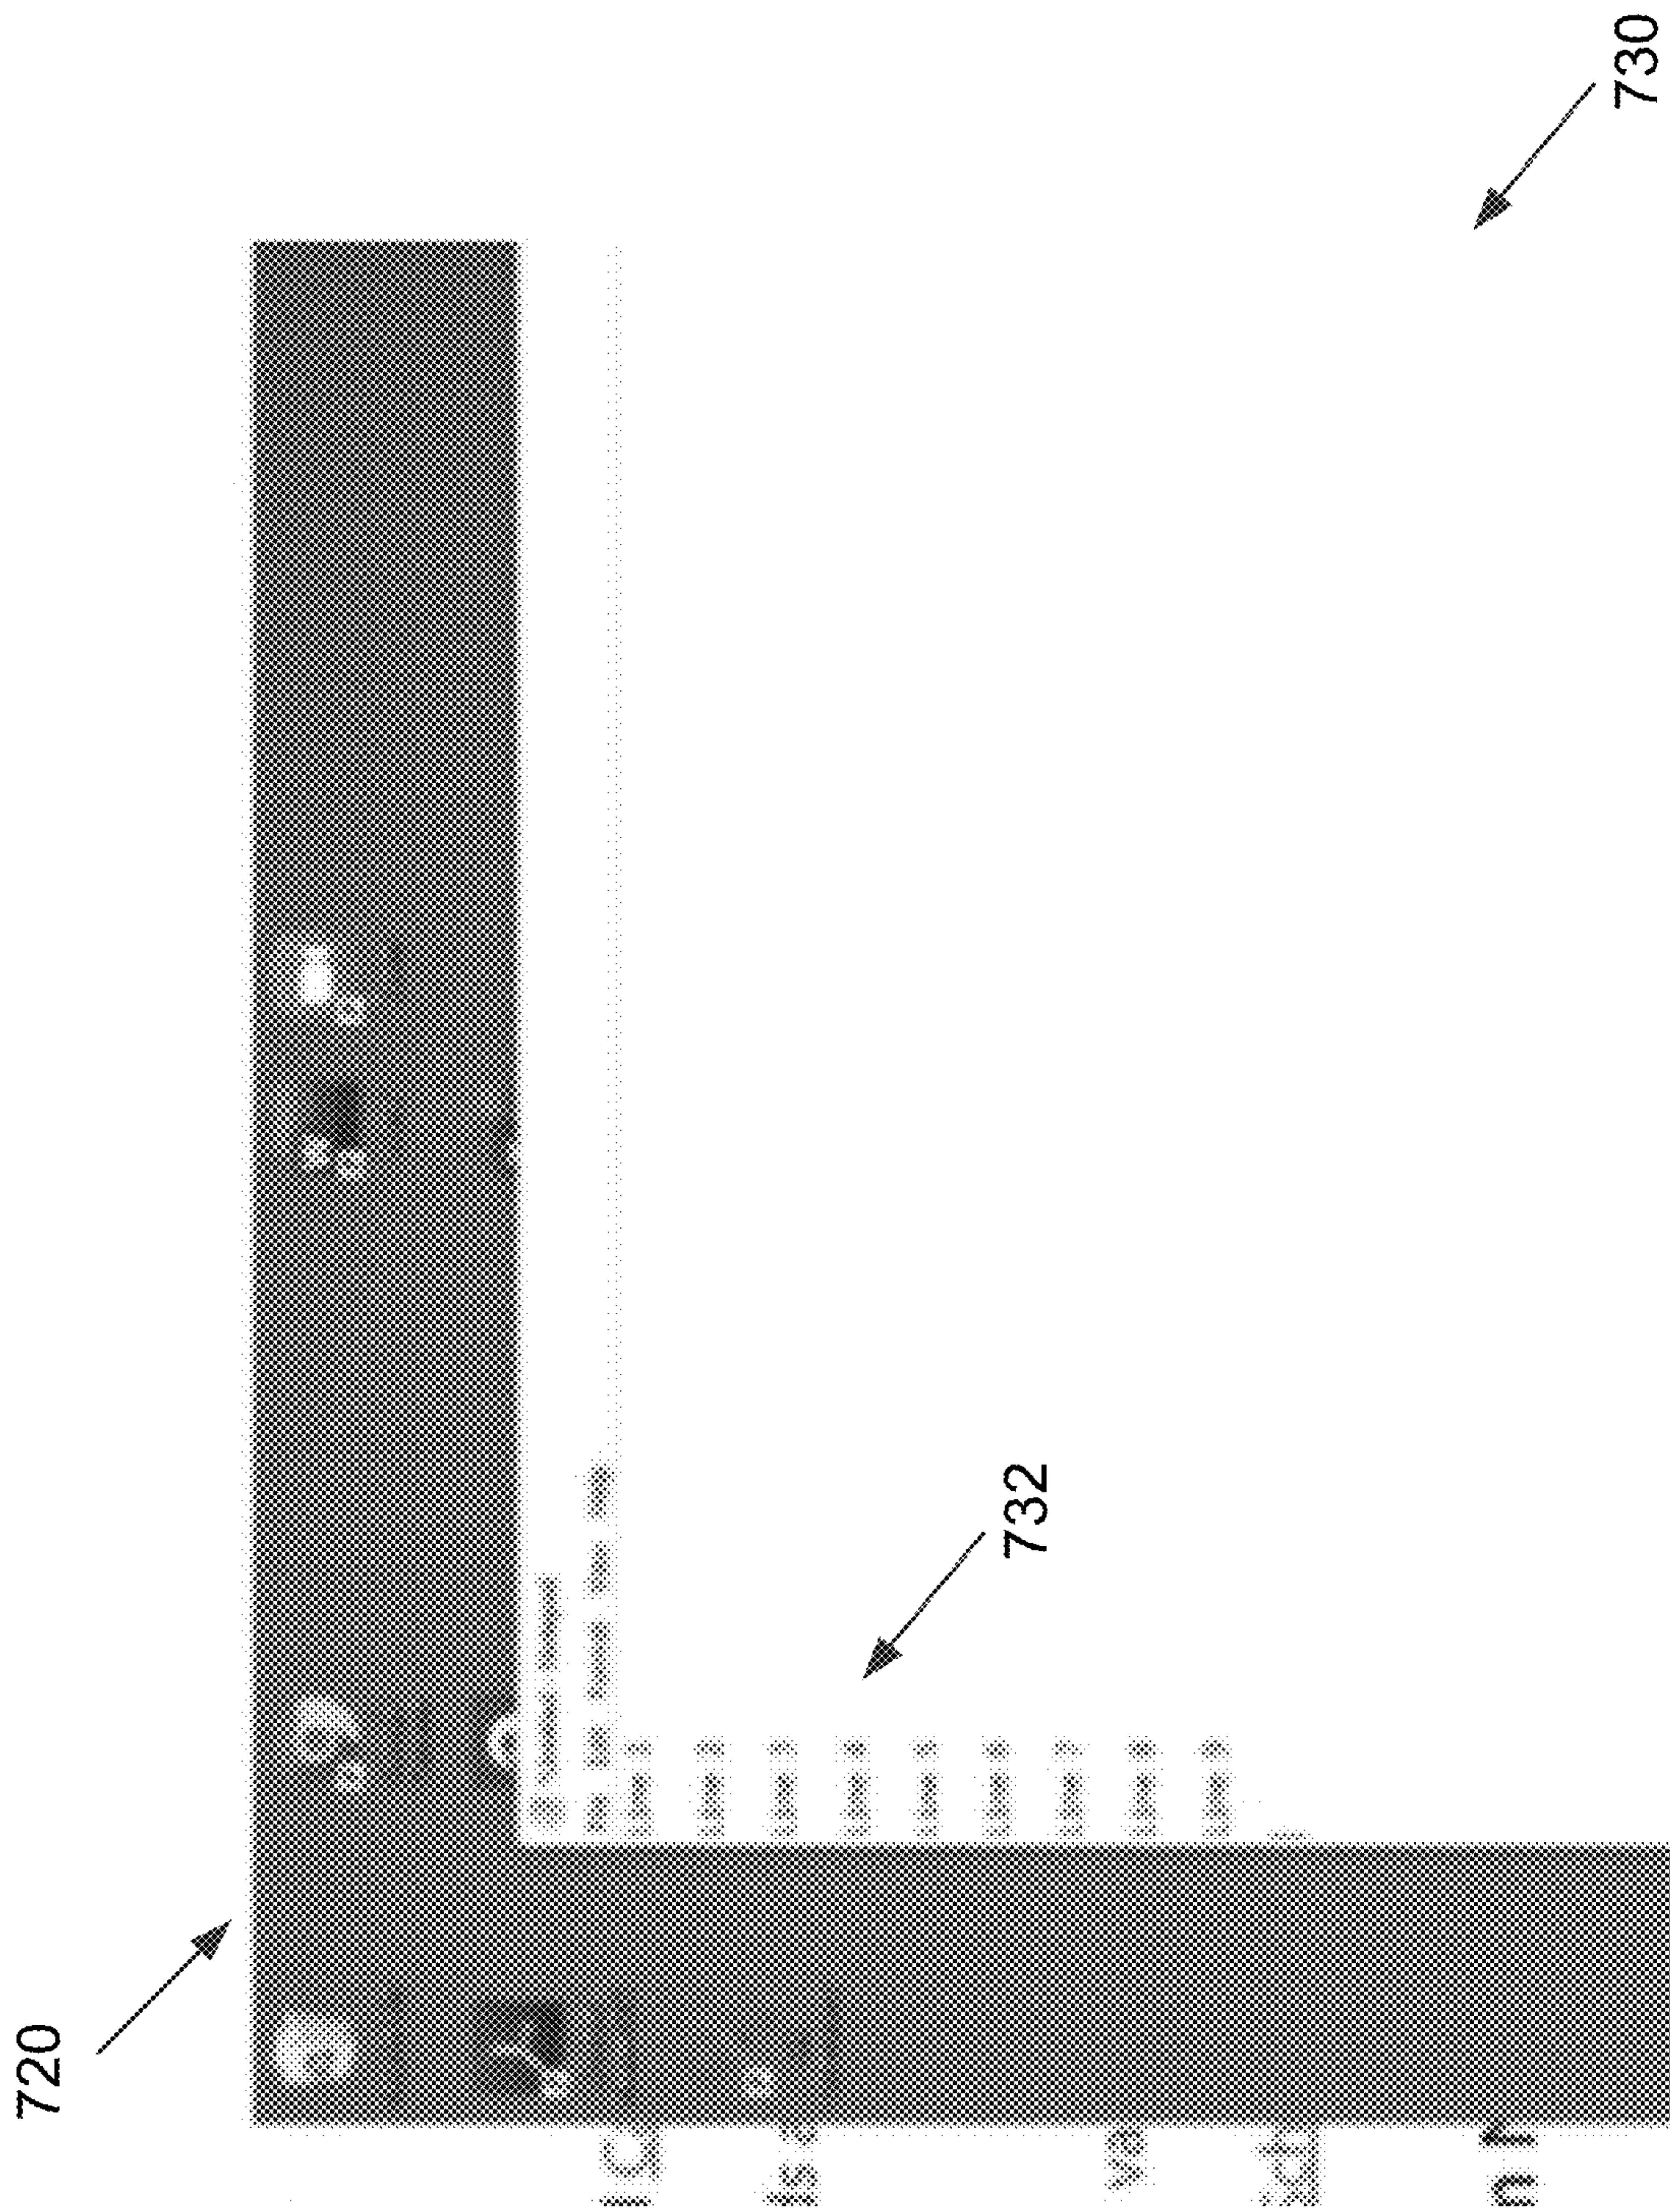
**FIG. 7I**

**FIG. 7J**


740

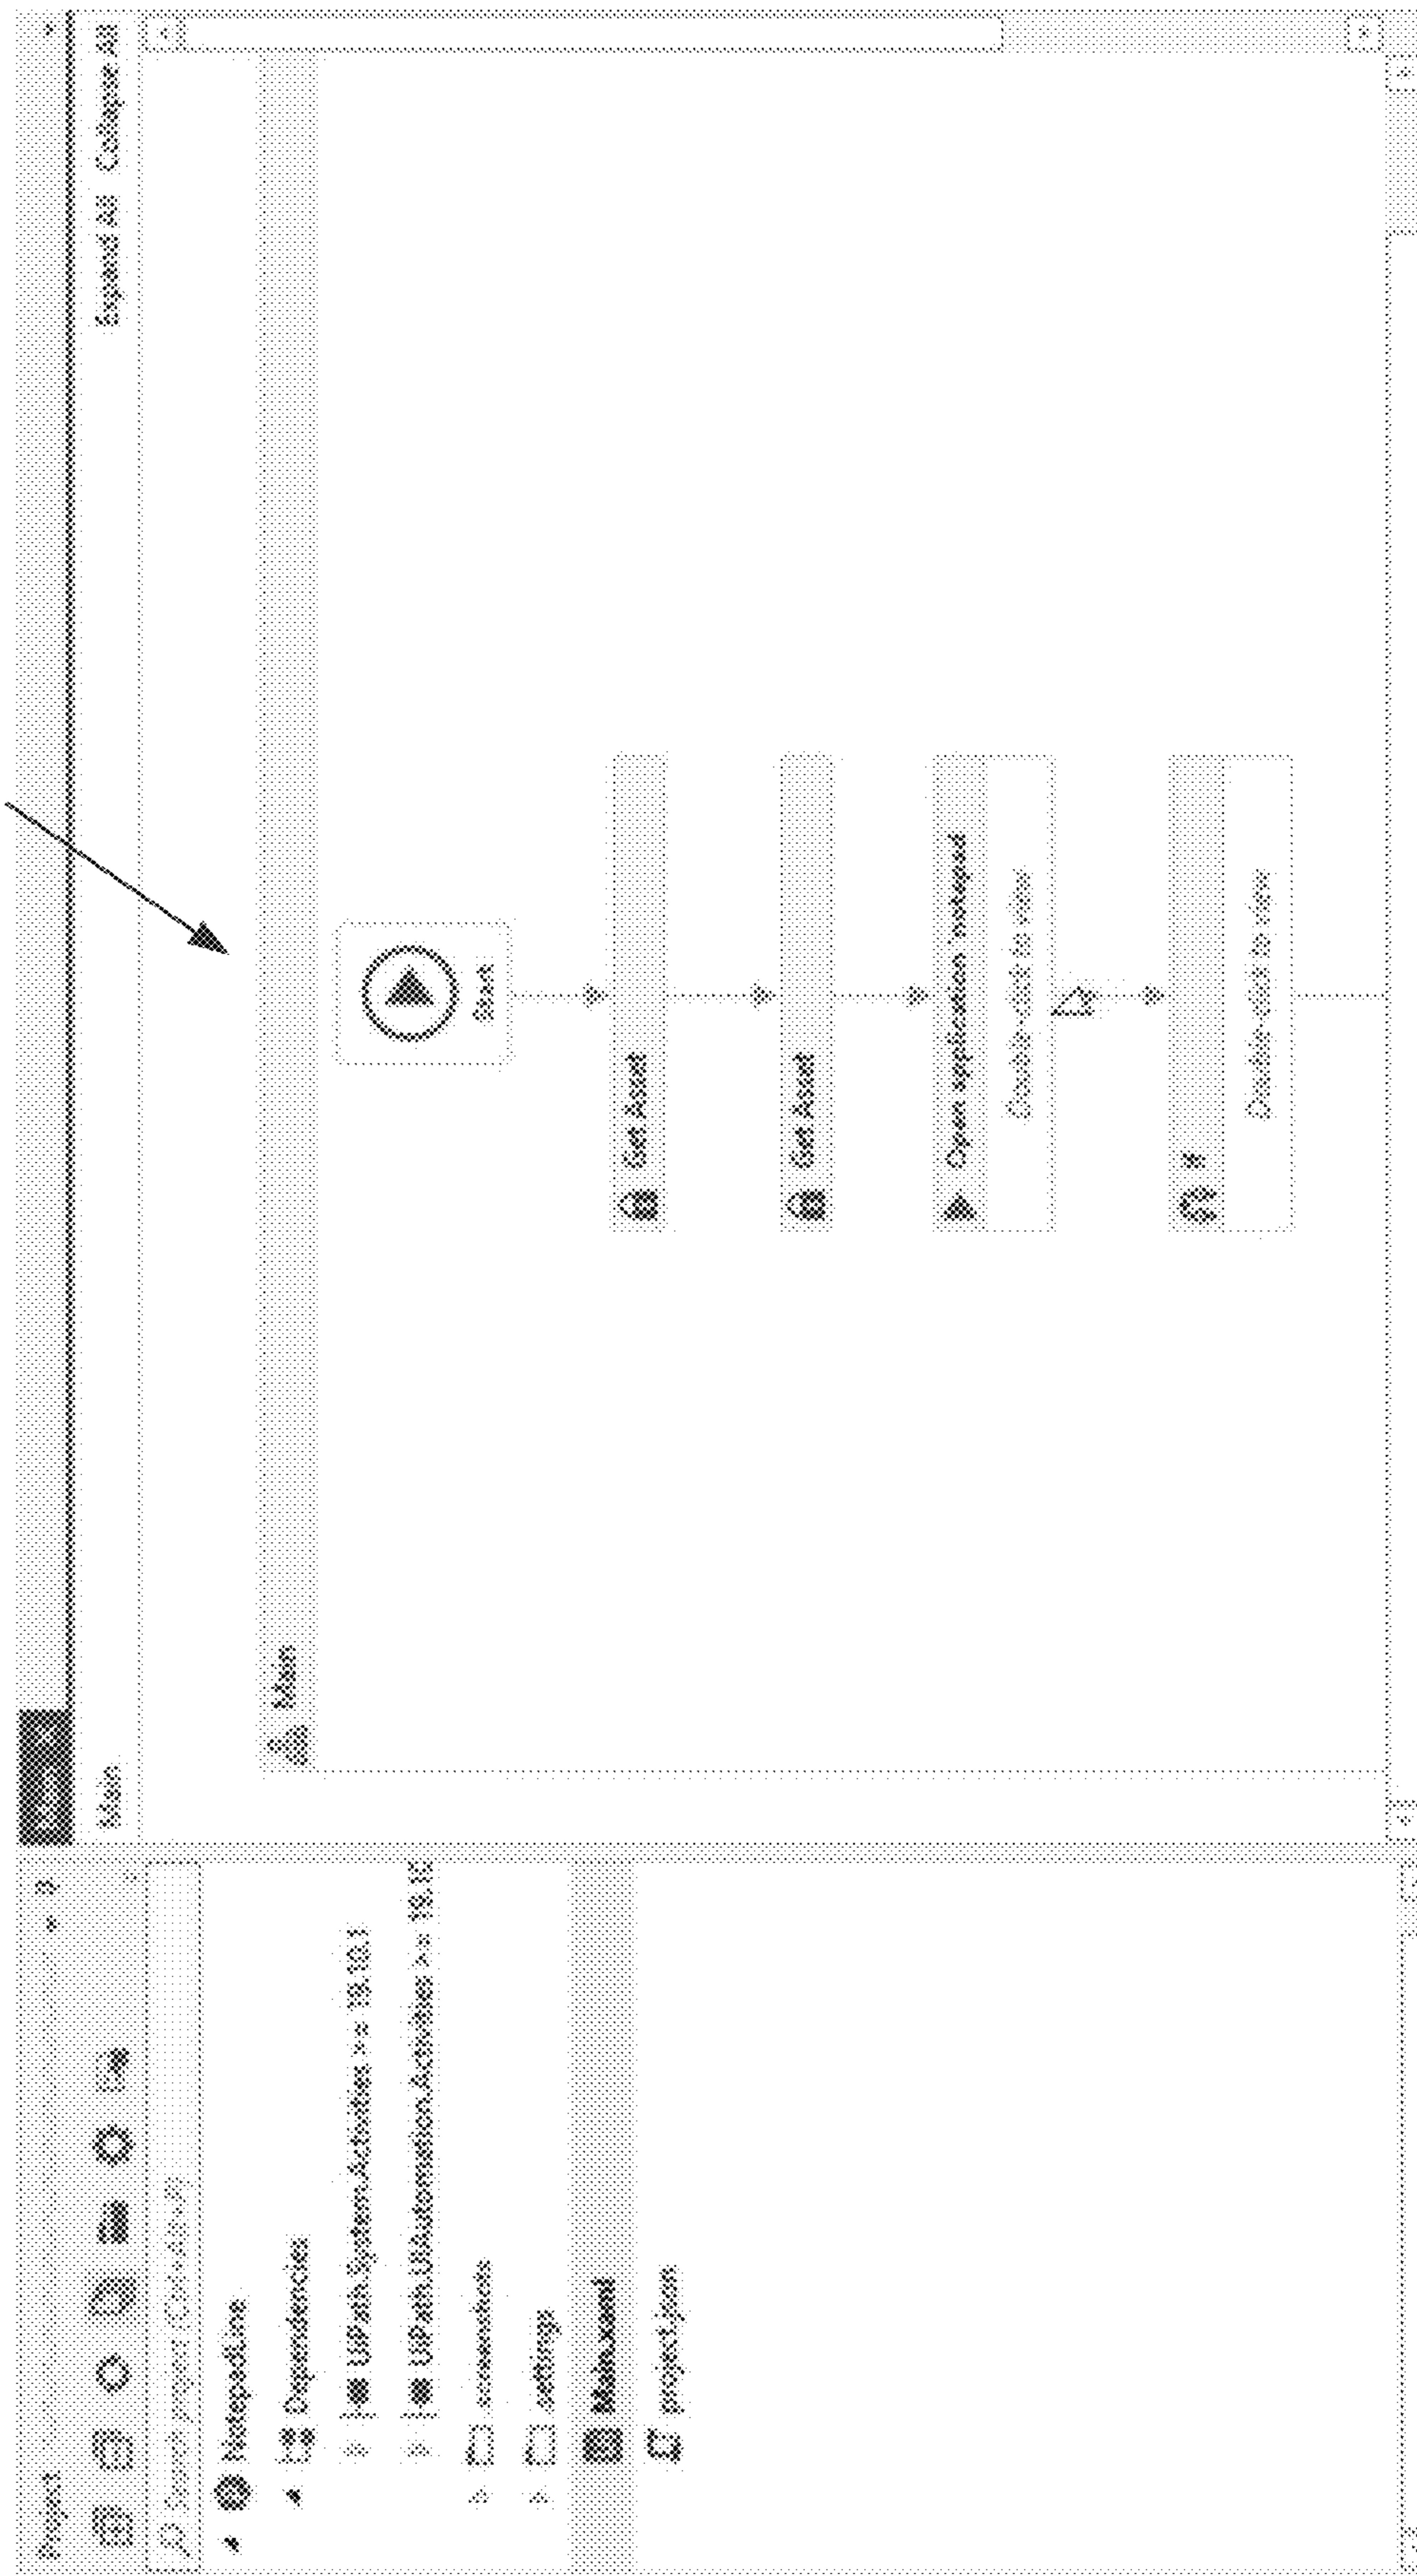


The image shows a vertical column of five Chinese characters. From top to bottom, they are: 而 (ér), 以 (yǐ), 之 (zhī), 于 (yú), and 也 (yě). Each character is rendered in a bold, black, sans-serif font.

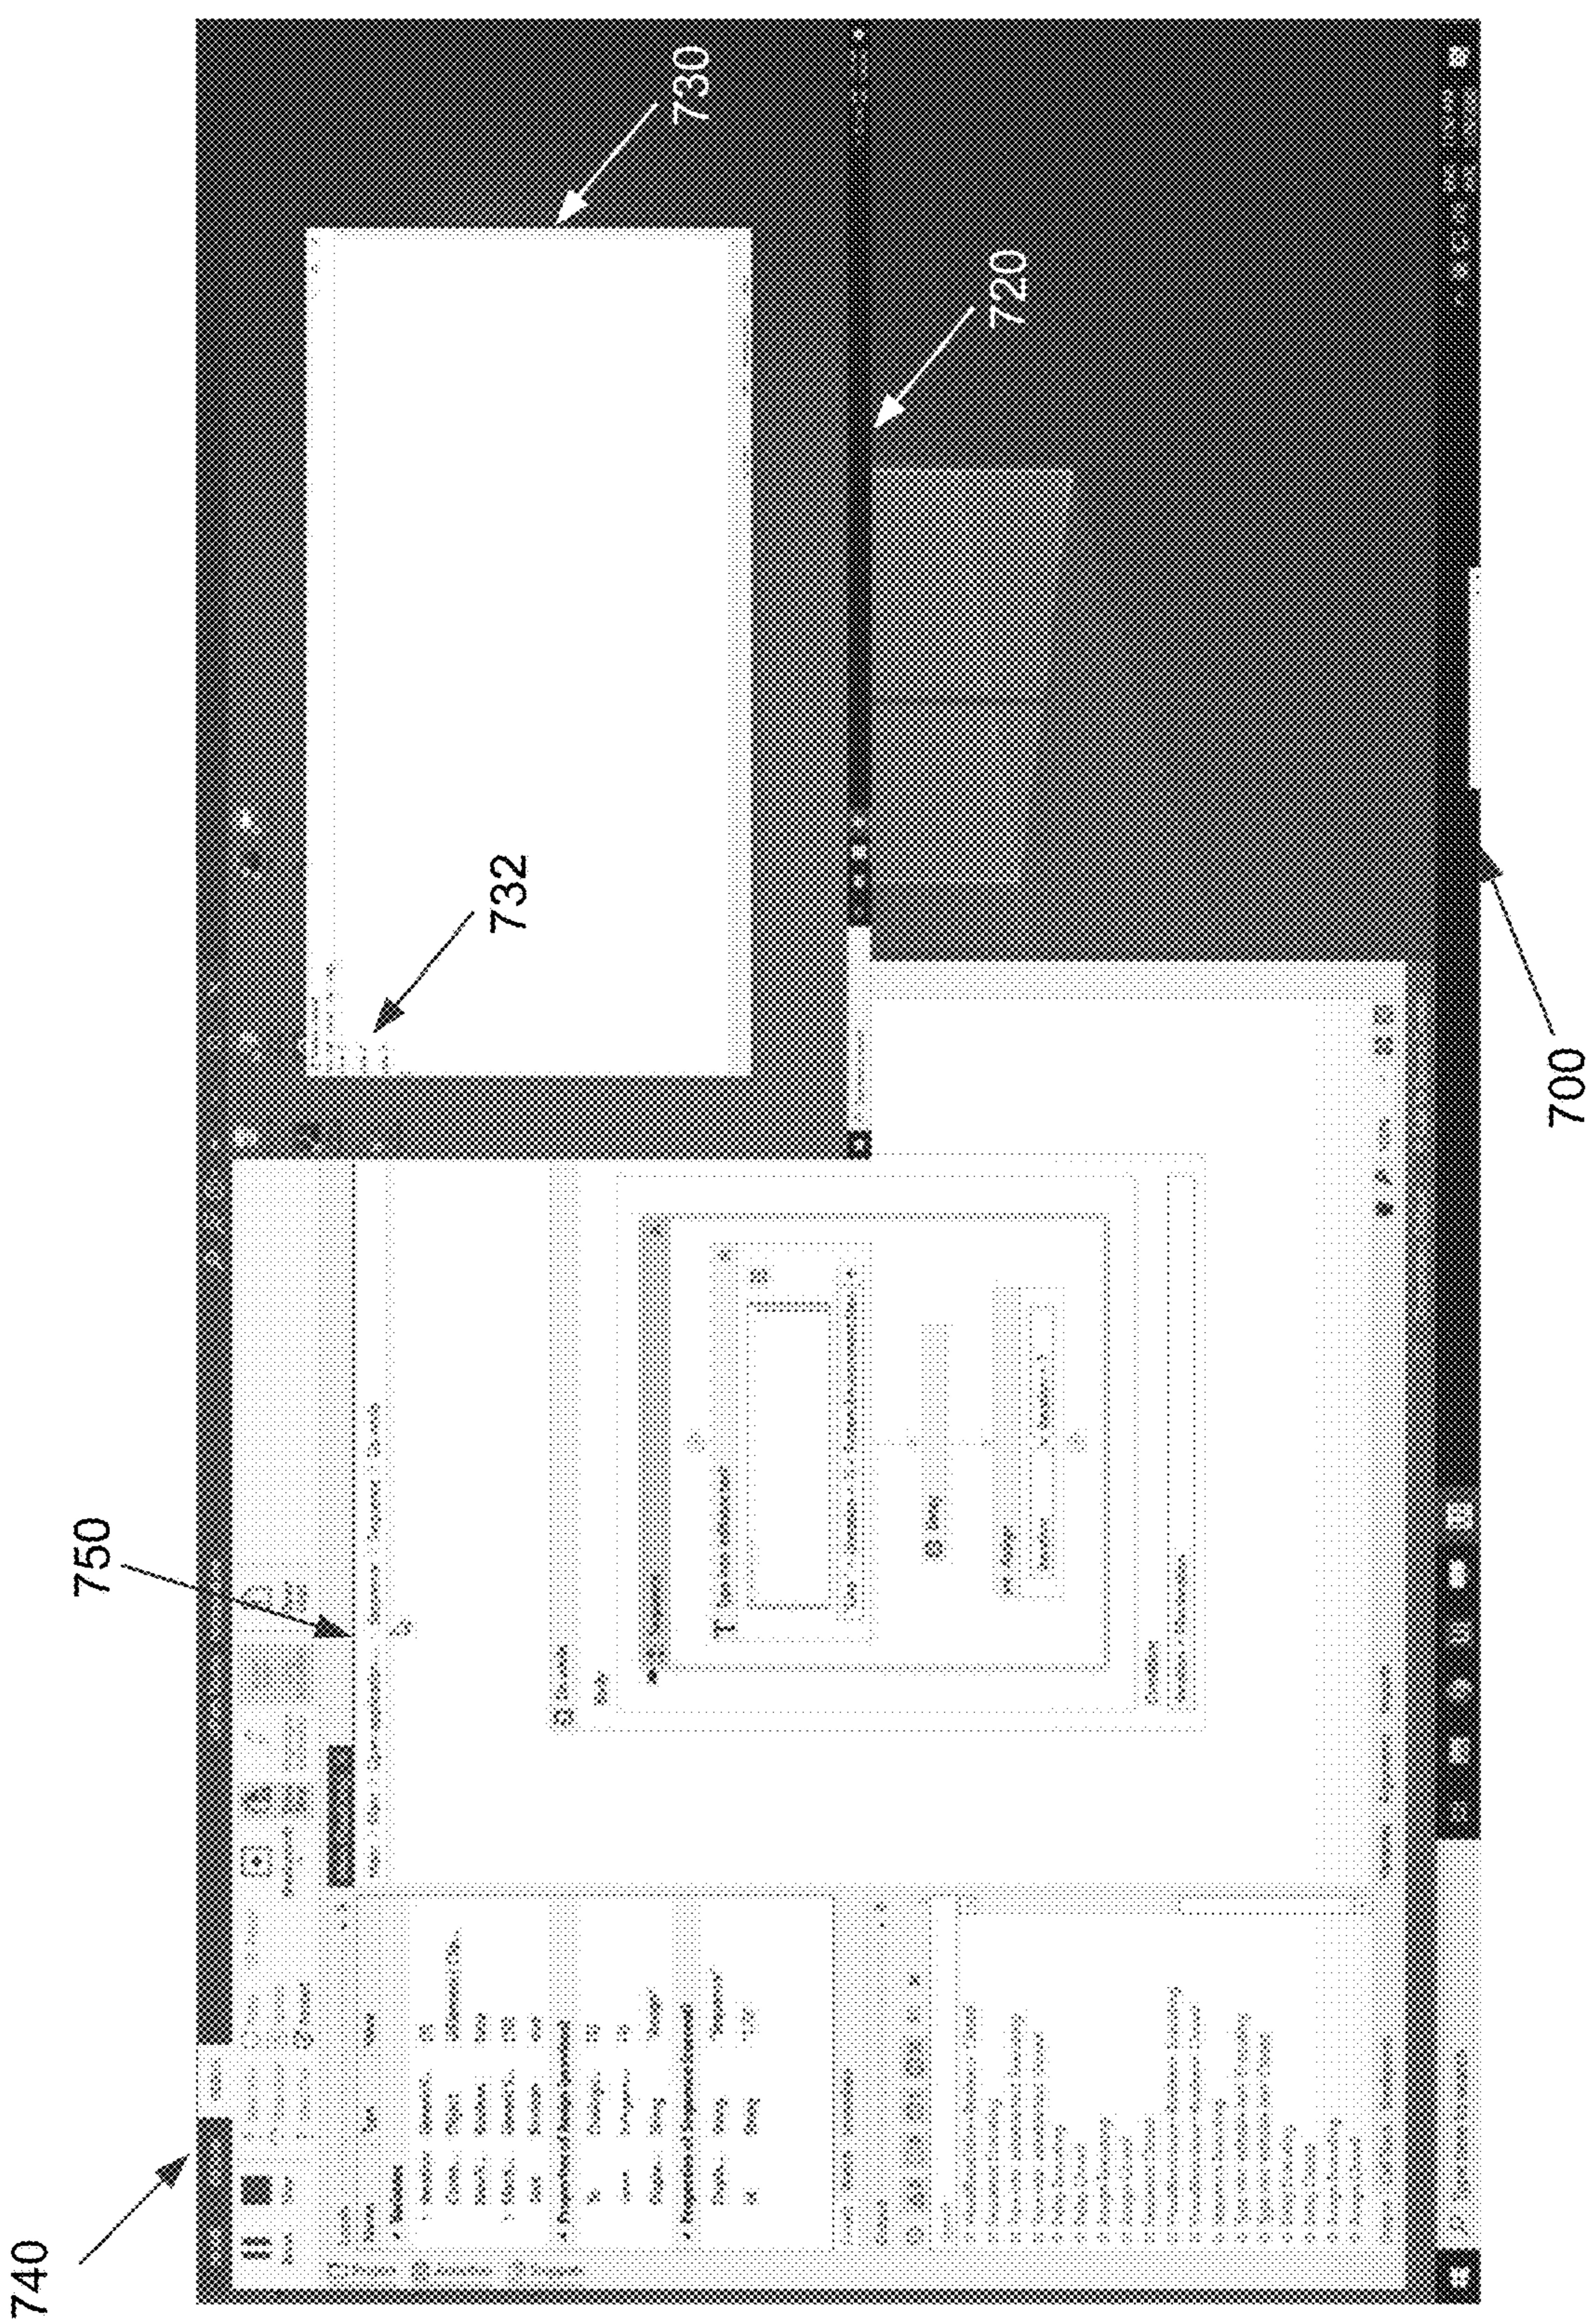


# FIG. 8

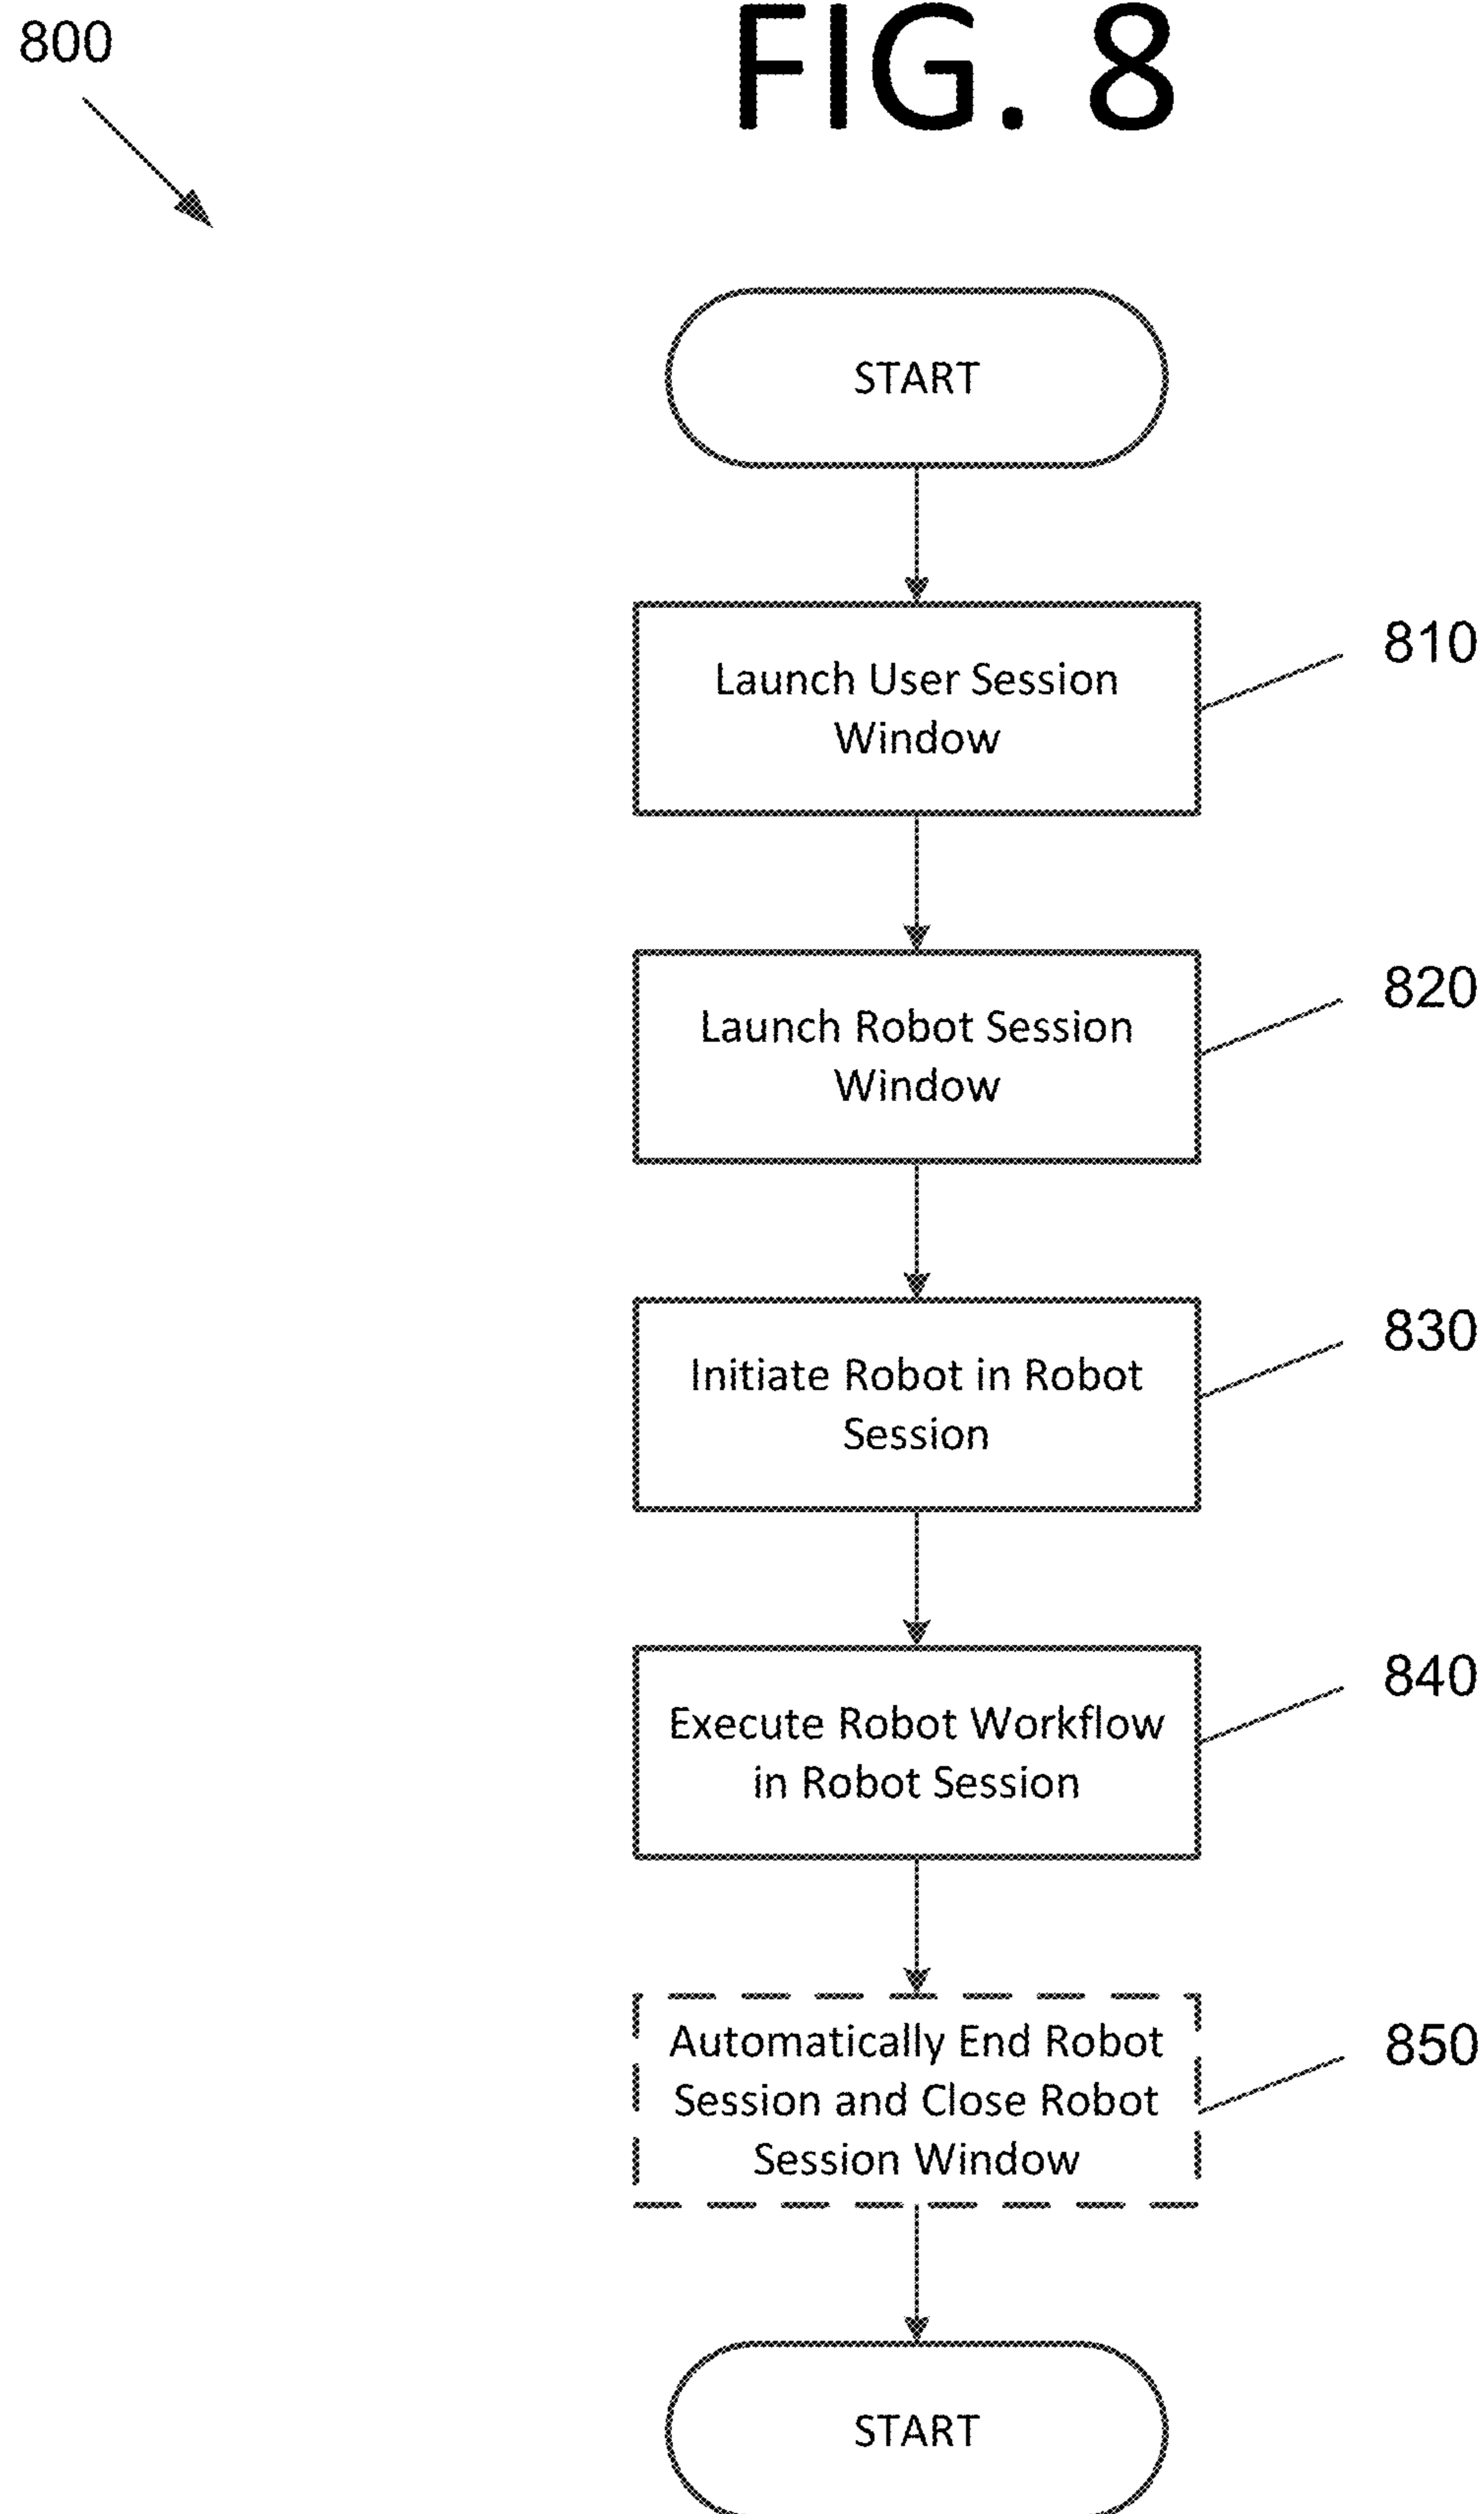

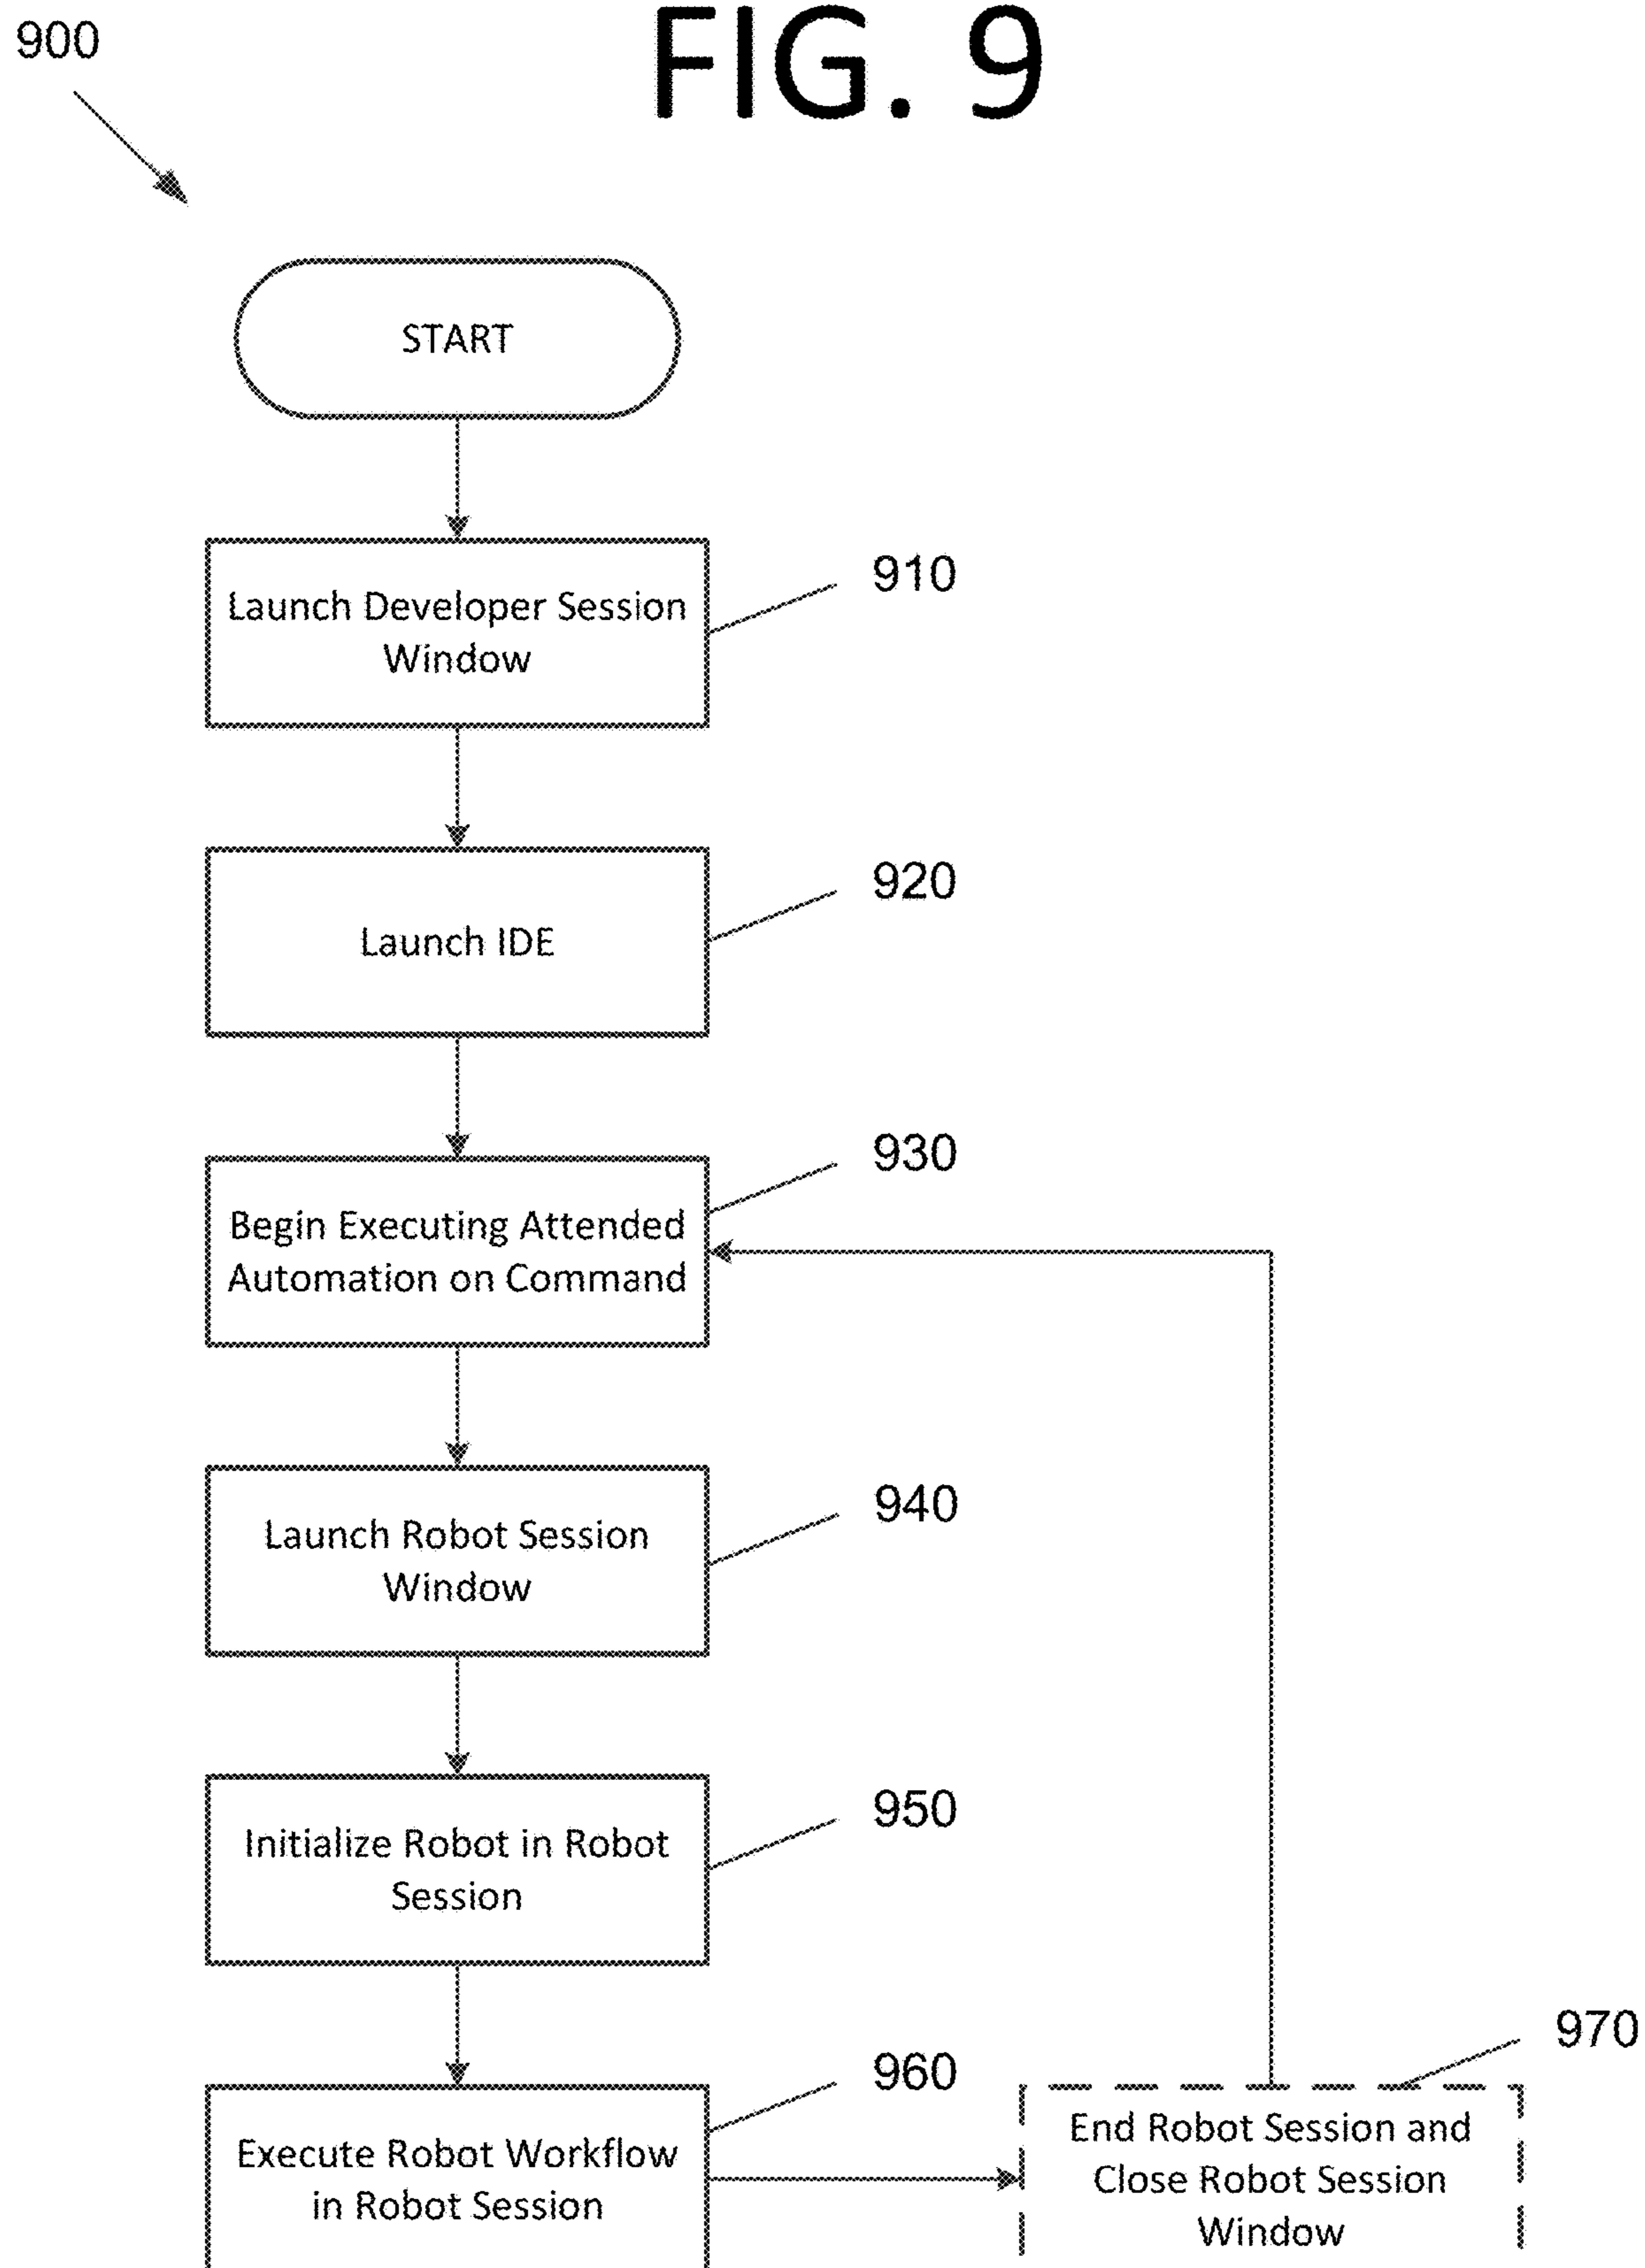**FIG. 9**


1000

# FIG. 10

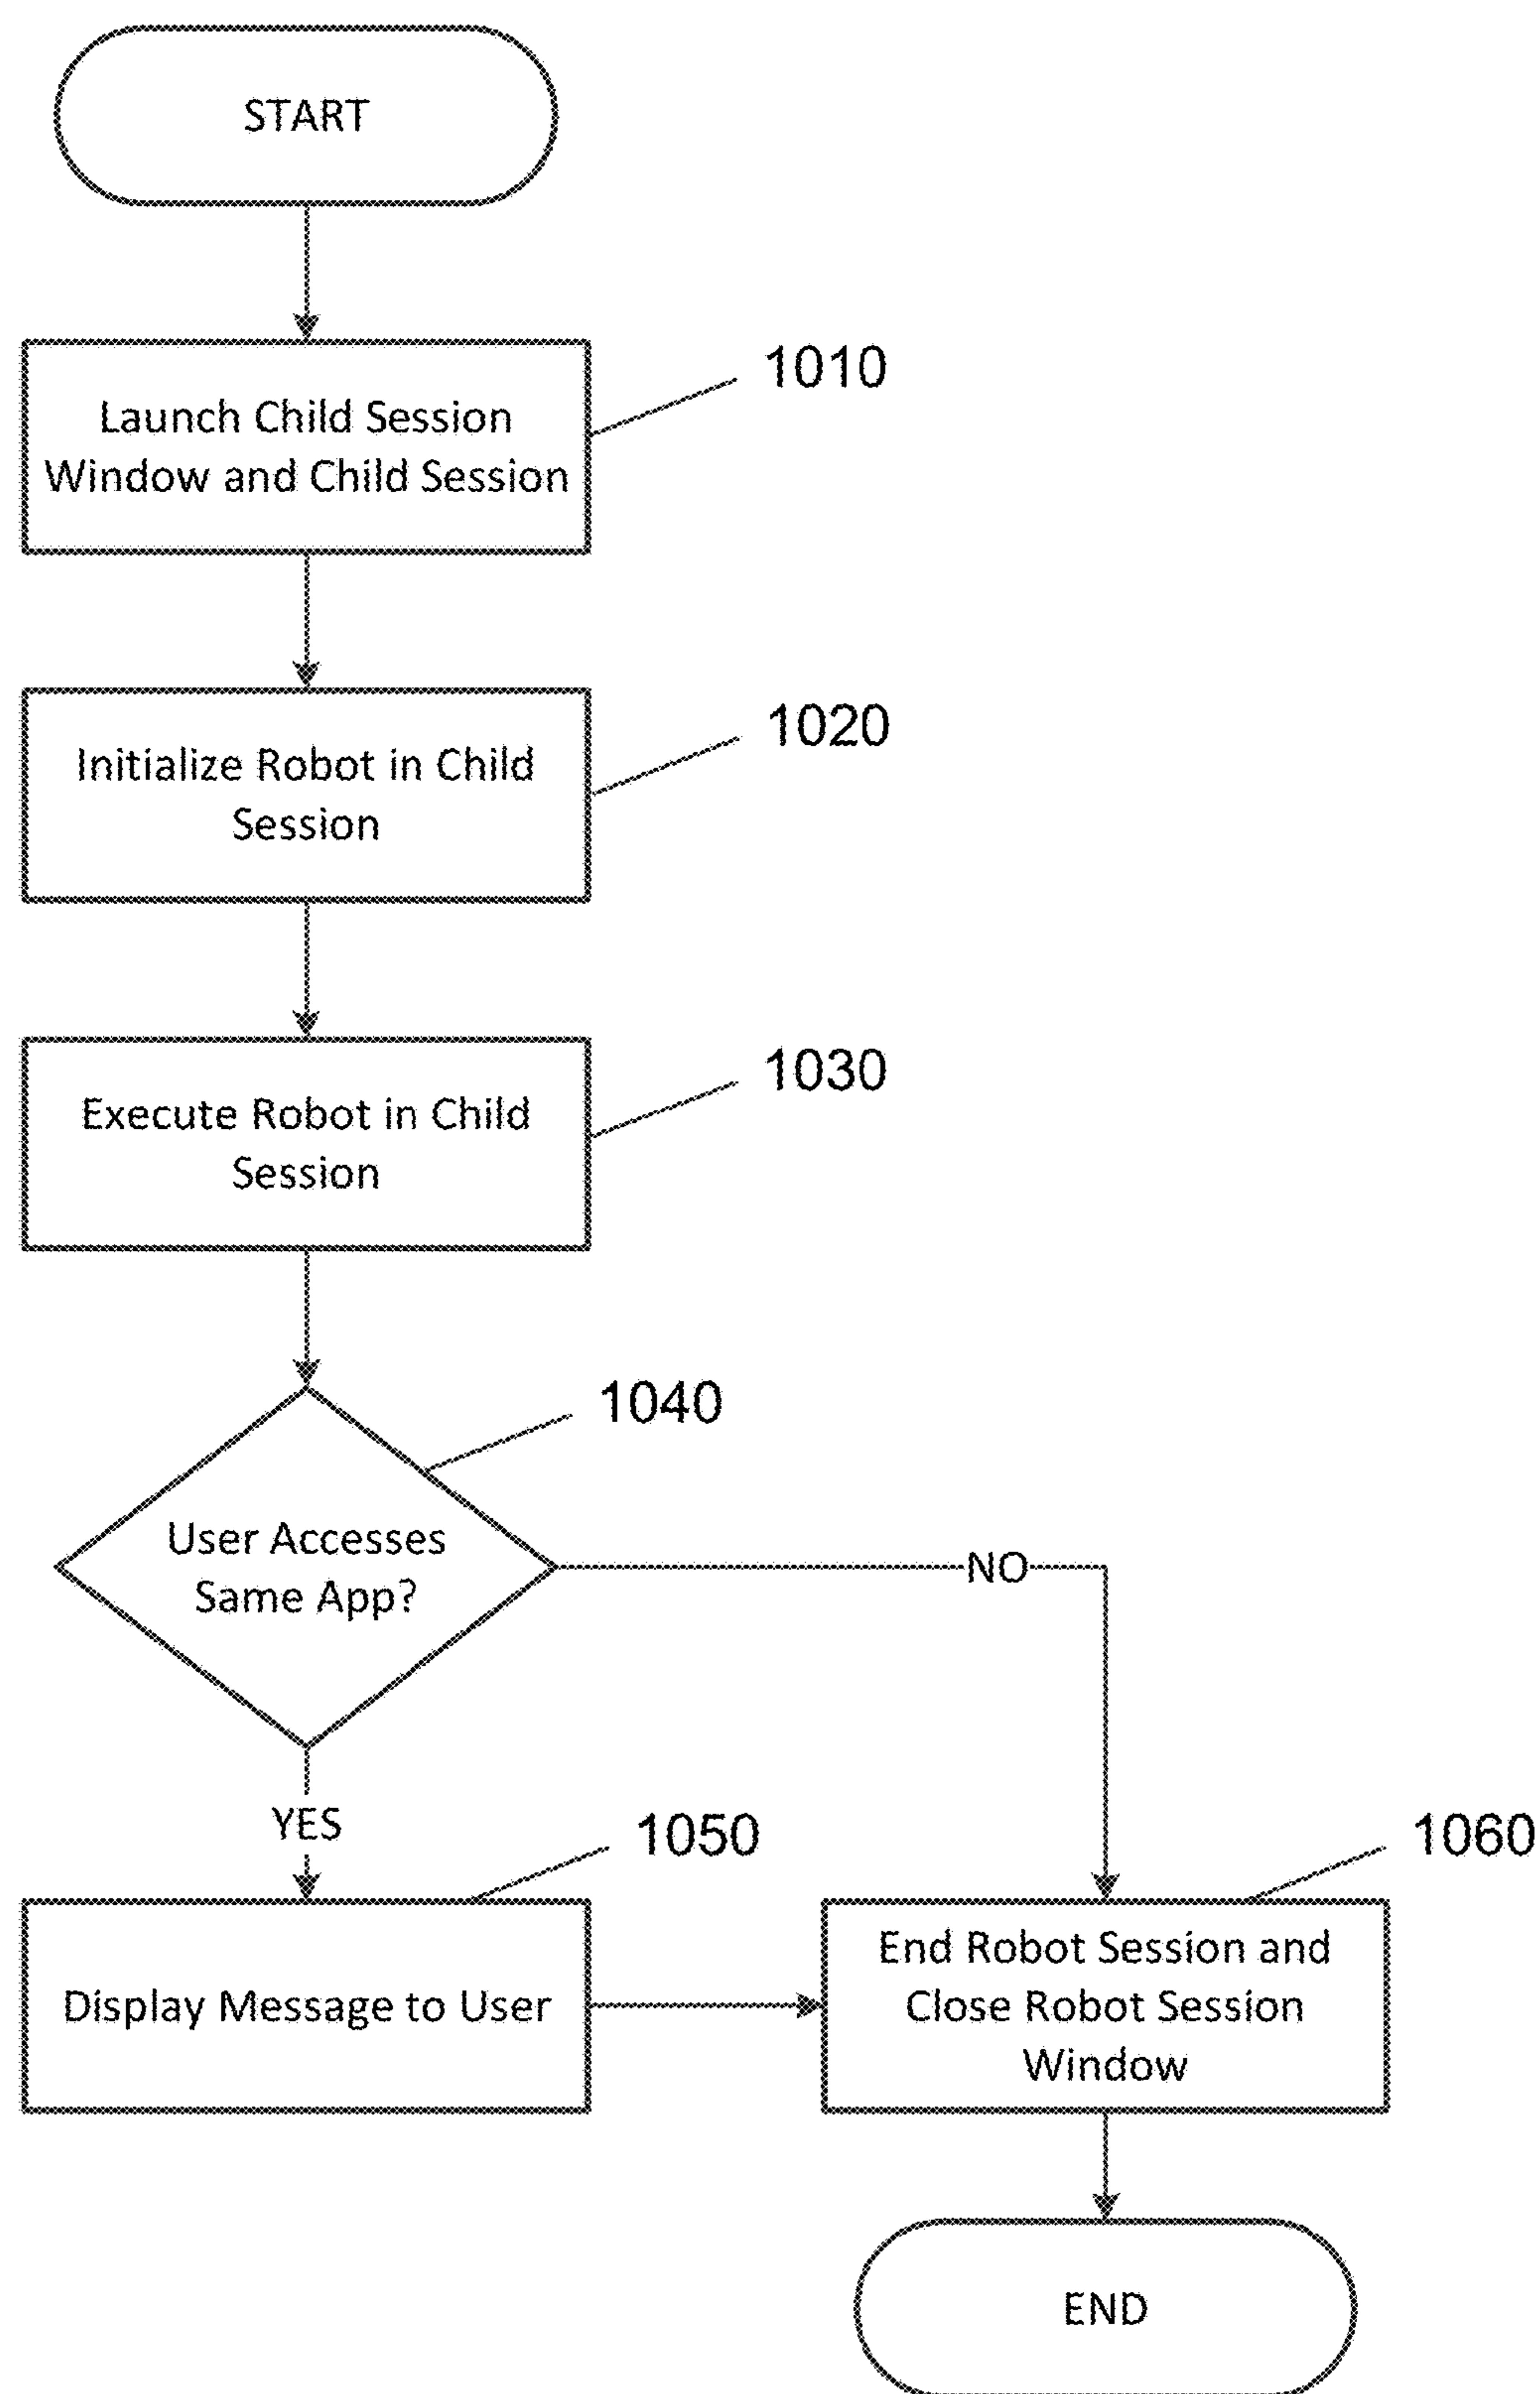


1100

# FIG. 11

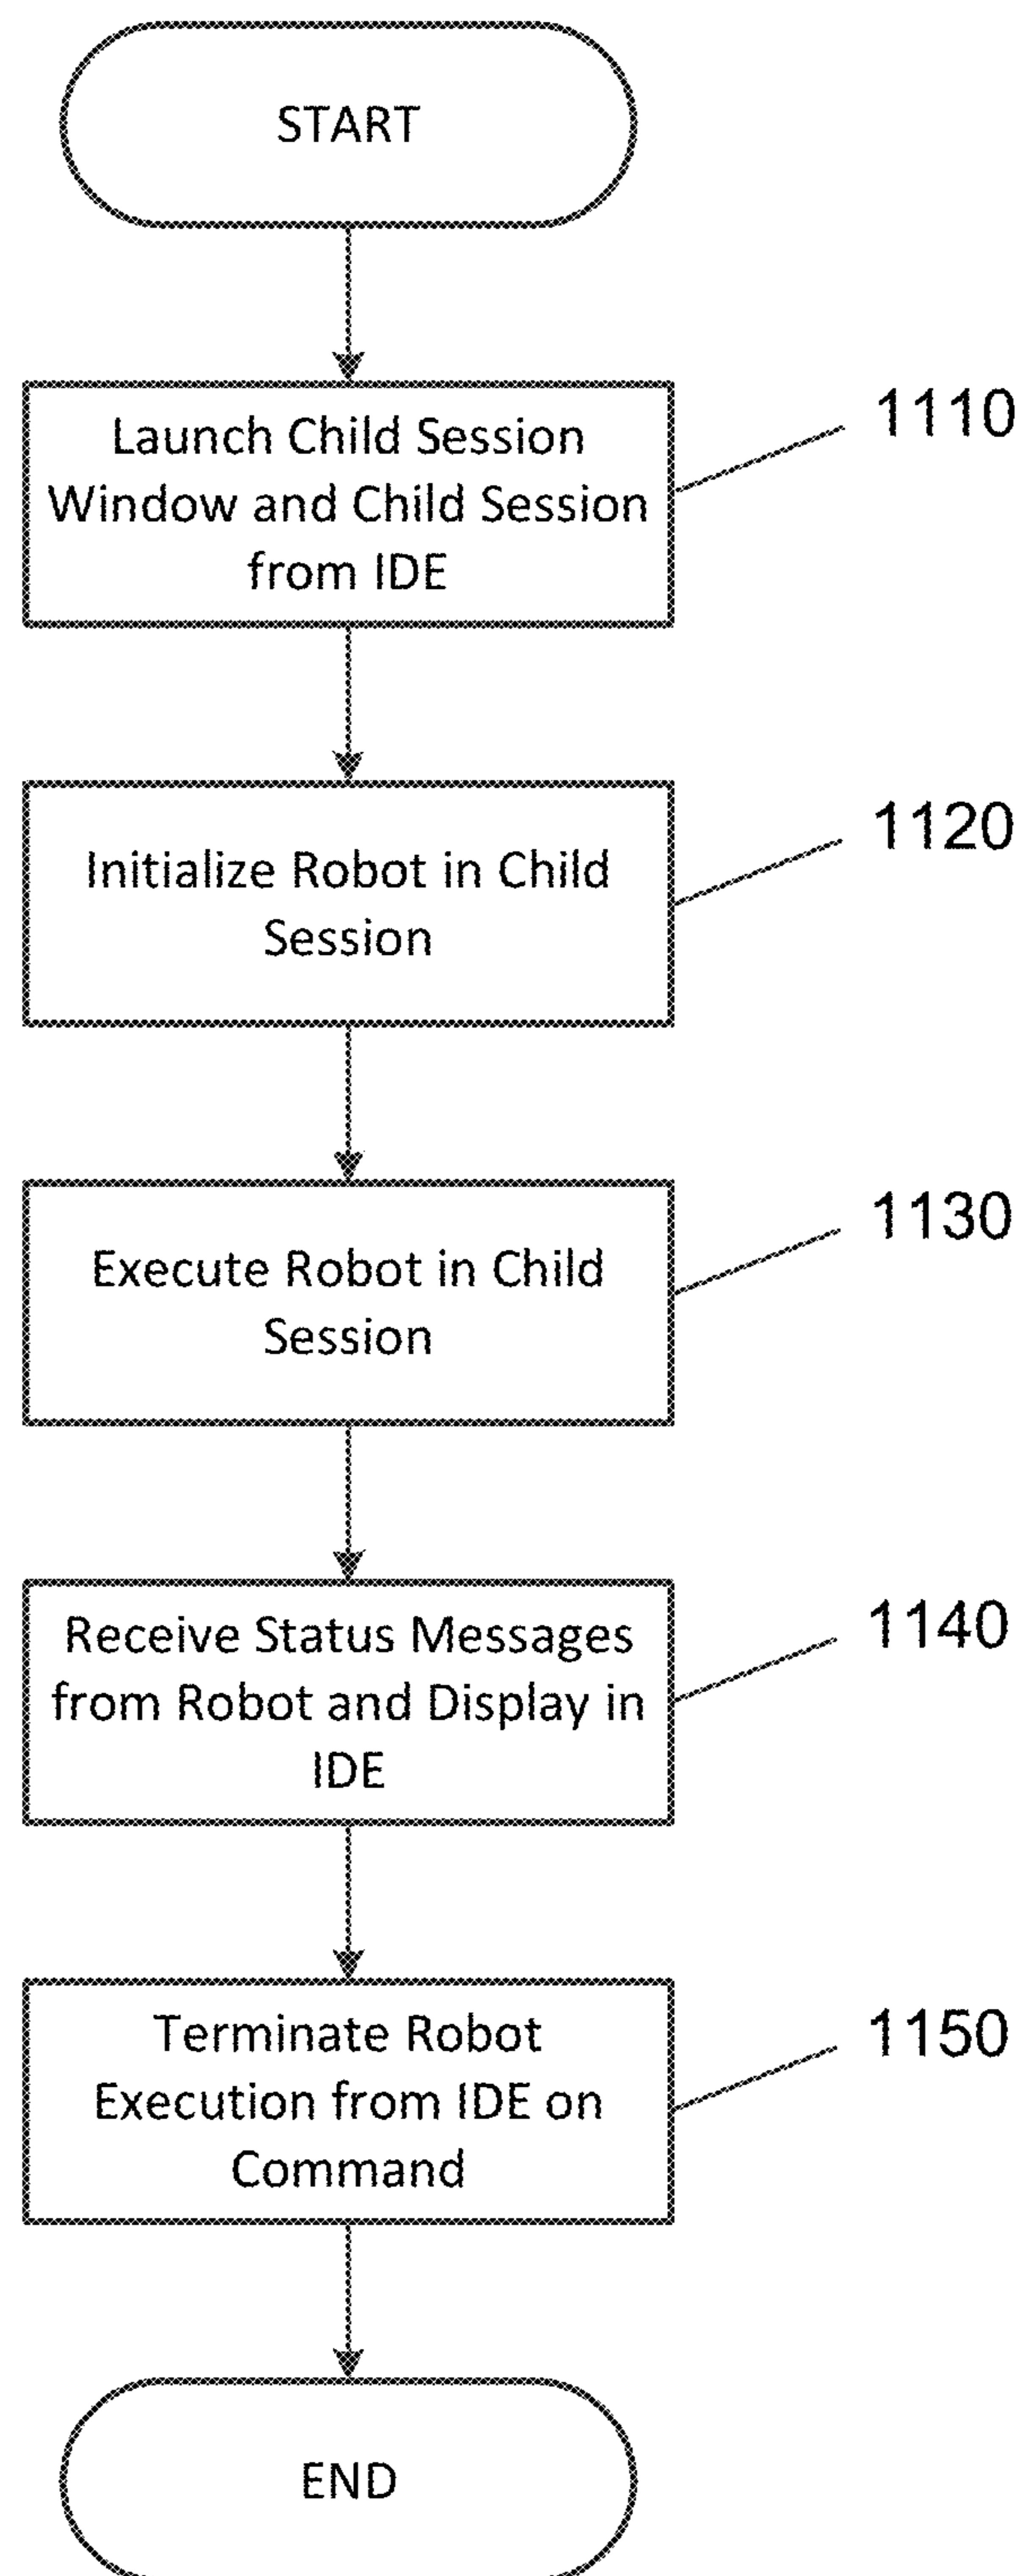

1200

# FIG. 12

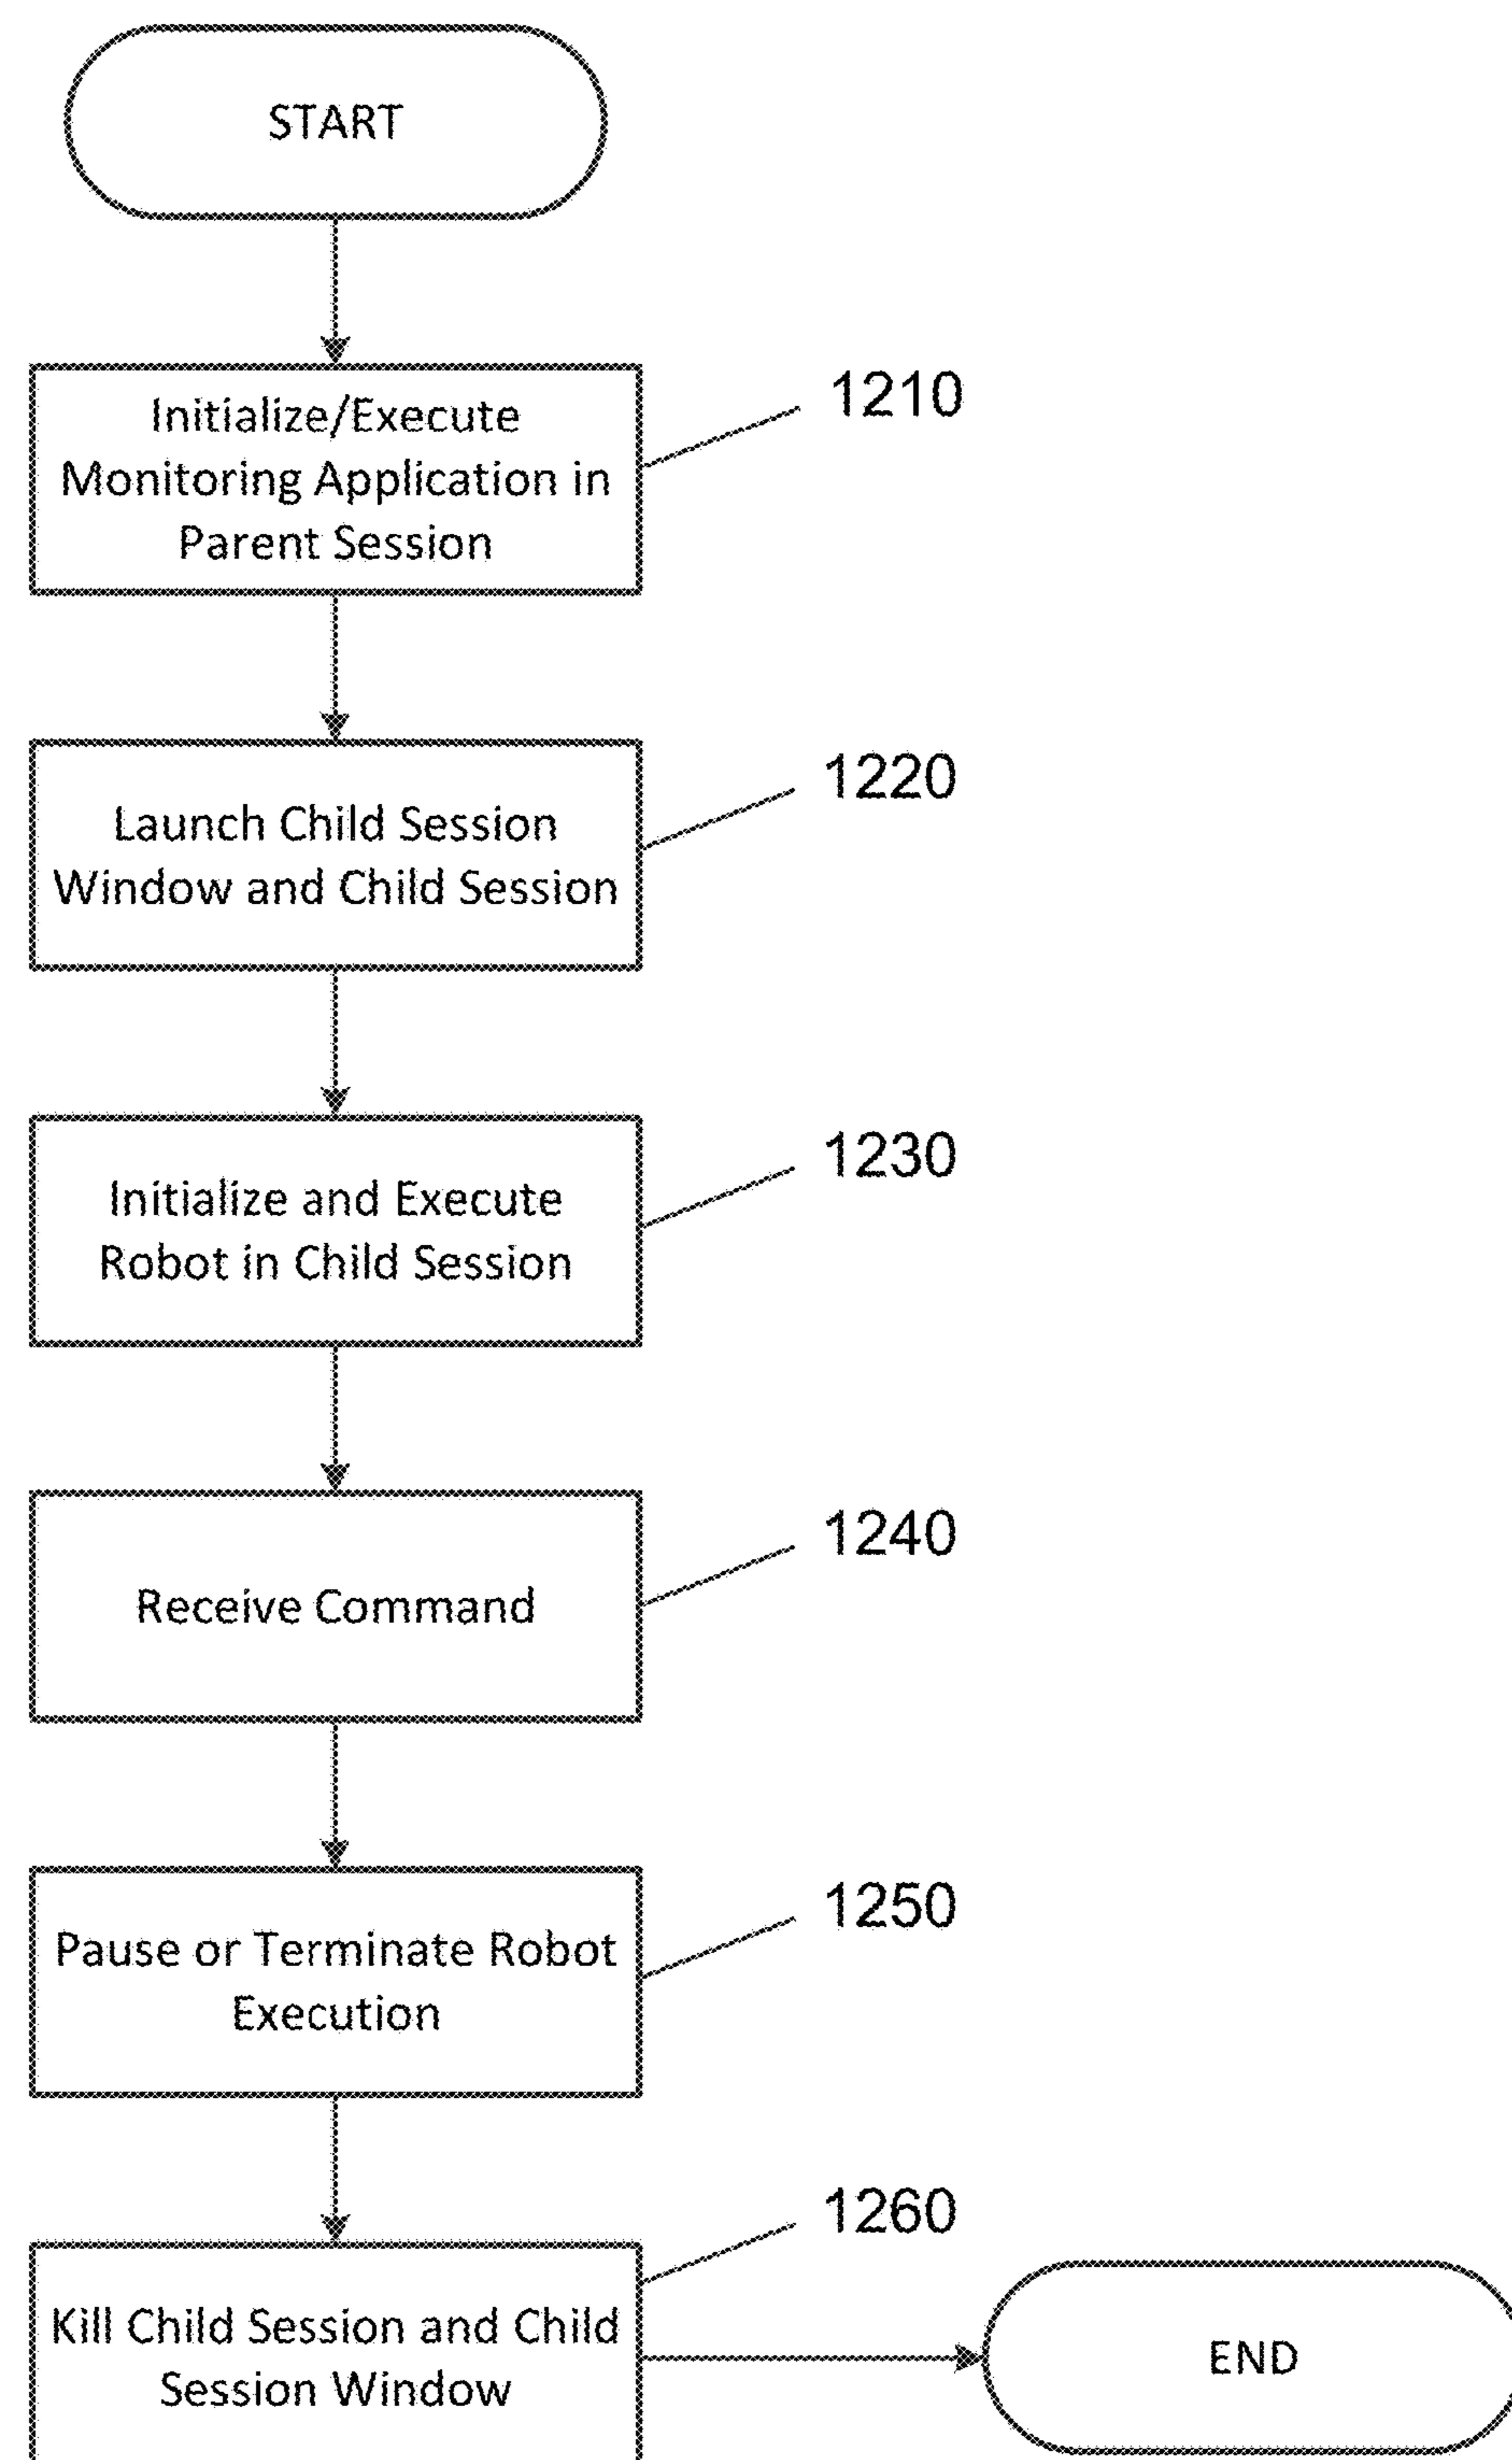

**AUTOMATION WINDOWS FOR ROBOTIC  
PROCESS AUTOMATION****CROSS REFERENCE TO RELATED  
APPLICATIONS**

This application is a continuation of, and claims the benefit of, U.S. Nonprovisional patent application Ser. No. 16/989,003, filed on Aug. 10, 2020, and issued as U.S. Pat. No. 11,325,254 on May 10, 2022, which is a continuation of U.S. Nonprovisional patent application Ser. No. 16/793,064 filed Feb. 18, 2020, and issued as U.S. Pat. No. 10,654,166 on May 19, 2020. The subject matter of these earlier filed applications is hereby incorporated by reference in its entirety.

**FIELD**

The present invention generally relates to robotic process automation (RPA), and more specifically, to automation windows for RPA for attended or unattended robots.

**BACKGROUND**

Attended automation robots run on a computing system operated by a user. An issue that can arise in attended automation scenarios is that the robot may “take over” the user’s computing system while the user is trying to interact with the computing system. In other words, the robot controls applications through the user interface (UI) in the same manner that the user would (e.g., simulating mouse clicks and keyboard input).

Various technologies exist that create complete or partial copies of an operating system or the applications running thereon. Emulators have been around for decades and may provide developers with the ability to test and debug applications. For instance, emulators may provide developers with the ability to test and debug mobile applications that use an operating system that does not support running development tools directly. Both Android® and iOS® offer emulators that can be run from a development machine to test and debug an Android® or iOS® application since the developer tools cannot be natively run on those mobile operating systems.

Simulators allow a developer to host a window on his or her local machine that lets the developer test and debug behavior of an application that are difficult or impossible to perform on a development machine. For example, simulators allow the developer to click a button to rotate the simulator, which tells the application running inside the simulator the device has been rotated for the purposes of testing and debugging application behavior that responds to these events. Another common example is multi-touch. Many developer machines do not support touch, so the simulator lets the developer test and debug how the application responds to multiple touch points. Android® and iOS® emulators also offer simulation capabilities. Furthermore, Microsoft® offers a simulator for their Universal Windows Platform (UWP) applications.

Virtual machines host a second operating system on the machine and can be opened and monitored through a window. This runs a completely different operating system and shares the hardware with the host machine. The “guest” machine must have its own copies of applications installed and does not share common resources or files with the user machine.

Docker® containers are conceptually a hybrid form of virtual machine. All of the applications that need to be executed are packaged into an immutable package that is executed directly on the host operating system. The package is not a complete copy of another operating system, but it does not by default share or have access to any of the applications or resources on the host machine. Thus, from a user experience perspective, Docker® containers feel similar to a virtual machine, but technically, the containers are not executing on a completely separate operating system.

However, conventional emulators, simulators, virtual machines (VMs), and hybrid VMs providing operating system (OS)-level virtualization (e.g., Docker® containers) do not address the issues that arise with attended automation robots operating on the same computing system as the user. Thus, the user essentially becomes a spectator for his or her own computing system, watching the robot work and being unable to interact with other applications on the machine that require user interaction. Accordingly, an improved approach may be beneficial.

**SUMMARY**

Certain embodiments of the present invention may provide solutions to the problems and needs in the art that have not yet been fully identified, appreciated, or solved by current RPA technologies. For example, some embodiments of the present invention pertain to automation windows for RPA for attended or unattended robots.

In an embodiment, a computer program is embodied on a non-transitory computer-readable medium. The program is configured to cause at least one processor to launch a child session window and a child session. The child session is a child of a parent session for an operating system and the child window is located within a parent window of the parent session. The program is also configured to cause the at least one processor to launch a user session window on a user computing system, launch a robot session window for a robot session as a child window of the user session window, initialize an RPA robot in the robot child session as a process, and execute the RPA robot. During execution, the RPA robot executes an RPA workflow including a plurality of activities within the child session window. The parent session and the child session have access to a common file system.

In another embodiment, a computer-implemented method for performing attended automation for RPA at design time includes launching a child session window and a child session from an integrated development environment (IDE). The child session is a child of a parent session for an operating system and the child window is located within a parent window of the parent session. The computer-implemented method also includes initializing an RPA robot in the child session as a process and executing the RPA robot. During execution, the RPA robot executes an RPA workflow including a plurality of activities within the child session window. The parent session and the child session have access to a common file system.

In yet another embodiment, a computer-implemented method for automation monitoring in RPA includes initializing and executing a monitoring and troubleshooting application in a parent session associated with a computing system. The computer-implemented method also includes launching a child session window and a child session. The child session is a child of the parent session for an operating system. The computer-implemented method further includes initializing and executing an unattended RPA robot in the

child session as a process, receiving a command from a user of the monitoring and troubleshooting application to terminate operation of the unattended RPA robot, and pausing or terminating the operation of the unattended RPA robot responsive to receiving the command. The parent session and the child session have access to a common file system.

#### BRIEF DESCRIPTION OF THE DRAWINGS

In order that the advantages of certain embodiments of the invention will be readily understood, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments that are illustrated in the appended drawings. While it should be understood that these drawings depict only typical embodiments of the invention and are not therefore to be considered to be limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of the accompanying drawings, in which:

FIG. 1 is an architectural diagram illustrating a robotic process automation (RPA) system, according to an embodiment of the present invention.

FIG. 2 is an architectural diagram illustrating a deployed RPA system, according to an embodiment of the present invention.

FIG. 3 is an architectural diagram illustrating the relationship between a designer, activities, and drivers, according to an embodiment of the present invention.

FIG. 4 is an architectural diagram illustrating an RPA system, according to an embodiment of the present invention.

FIG. 5 is an architectural diagram illustrating a computing system configured to execute automation windows for RPA, according to an embodiment of the present invention.

FIG. 6 illustrates some applications of a user computing system running user and attended automation robot sessions with some applications also running on the user computing system, according to an embodiment of the present invention.

FIGS. 7A-K are screenshots illustrating an example of separate sessions for a user and a robot for RPA, according to an embodiment of the present invention.

FIG. 8 is a flowchart illustrating a process for enabling a robot and a user to operate a computing system simultaneously using attended automation windows, according to an embodiment of the present invention.

FIG. 9 is a flowchart illustrating a process for enabling a robot and an RPA developer to operate a computing system simultaneously using attended automation windows, according to an embodiment of the present invention.

FIG. 10 is a flowchart illustrating a process for performing attended or unattended automation using automation windows for users, according to an embodiment of the present invention.

FIG. 11 is a flowchart illustrating a process for performing attended or unattended automation using automation windows for RPA developers, according to an embodiment of the present invention.

FIG. 12 is a flowchart illustrating a process for performing automation monitoring, according to an embodiment of the present invention.

Unless otherwise indicated, similar reference characters denote corresponding features consistently throughout the attached drawings.

#### DETAILED DESCRIPTION OF THE EMBODIMENTS

Some embodiments pertain to automation windows for RPA for attended or unattended robots. In some embodi-

ments, automation windows are used for attended automation. However, in some embodiments, and as discussed below, automation windows may be used for monitoring unattended robots, such as when an operations engineer remotely monitors one or more robots executing on a server. Applications for automation windows include, but are not limited to, emulators, simulators, VMs, and hybrid VMs providing OS-level virtualization (e.g., Docker® containers). Some embodiments create and host a second (e.g., child) session as a window including the UIs of applications being controlled by an attended automation process. As used herein, a “window” may apply to a window representing a UI shown within the main UI, a second screen of a second display of a computing system, a virtual desktop, an isolated environment (i.e., a window (referred to as the “host”) that draws the UIs of all applications launched inside the environment (referred to as “children”) and runs them in the context of the host session), etc. without deviating from the scope of the invention.

Running multiple sessions allows the robot to operate in this second session while the user interacts with a first session (e.g., a parent session). Alternatively, the robot may operate in the first session while the user operates in the second session. The user may thus be able to interact with applications that the robot is not using (e.g., the user could use Outlook® while the robot is moving data from Excel® to a web browser), or the user and the robot may be able to interact with the same application if that application is capable of this functionality (e.g., the robot is interacting with one instance in a web browser while the user interacts with another instance).

The user and the robot are both interacting with the same application installations and file system. Changes made via the robot and the user in an application will be made as if a single user made them, rather than having the user and the robot each work with separate versions of the applications and file systems. In other words, the applications are the user’s local Excel®, Outlook®, etc. Also, the local file system may be utilized with no additional configuration. This differs from a Docker® container, for example, which requires an additional configuration step to have access to the file system.

In some embodiments, any desired number of sessions for any number of robots may be created and used without deviating from the scope of the invention. For instance, a user may interact with a first session, a first robot may interact with a second session, a second robot may interact with a third session, etc. In certain embodiments, multiple robots may interact with a single session.

The functionality for creating the session may be implemented via Windows® Terminal Services Child Sessions, for example, which can create a session back into a user’s own machine without the user having to log out. The newly created session appears as a child window and contains and launches applications that exist in the user’s session. In other words, the separation between the user and the robot occurs at the UI level. If a file is deleted, for example, this occurs across all sessions running on the computing system.

Certain embodiments may be employed for robotic process automation (RPA). FIG. 1 is an architectural diagram illustrating an RPA system 100, according to an embodiment of the present invention. RPA system 100 includes a designer 110 that allows a developer to design and implement workflows. Designer 110 may provide a solution for application integration, as well as automating third-party applications, administrative Information Technology (IT) tasks, and business IT processes. Designer 110 may facilitate

development of an automation project, which is a graphical representation of a business process. Simply put, designer **110** facilitates the development and deployment of workflows and robots.

The automation project enables automation of rule-based processes by giving the developer control of the execution order and the relationship between a custom set of steps developed in a workflow, defined herein as “activities.” One commercial example of an embodiment of designer **110** is UiPath Studio™. Each activity may include an action, such as clicking a button, reading a file, writing to a log panel, etc. In some embodiments, workflows may be nested or embedded.

Some types of workflows may include, but are not limited to, sequences, flowcharts, FSMs, and/or global exception handlers. Sequences may be particularly suitable for linear processes, enabling flow from one activity to another without cluttering a workflow. Flowcharts may be particularly suitable to more complex business logic, enabling integration of decisions and connection of activities in a more diverse manner through multiple branching logic operators. FSMs may be particularly suitable for large workflows. FSMs may use a finite number of states in their execution, which are triggered by a condition (i.e., transition) or an activity. Global exception handlers may be particularly suitable for determining workflow behavior when encountering an execution error and for debugging processes.

Once a workflow is developed in designer **110**, execution of business processes is orchestrated by conductor **120**, which orchestrates one or more robots **130** that execute the workflows developed in designer **110**. One commercial example of an embodiment of conductor **120** is UiPath Orchestrator™. Conductor **120** facilitates management of the creation, monitoring, and deployment of resources in an environment. Conductor **120** may act as an integration point, or one of the aggregation points, with third-party solutions and applications.

Conductor **120** may manage a fleet of robots **130**, connecting and executing robots **130** from a centralized point. Types of robots **130** that may be managed include, but are not limited to, attended robots **132**, unattended robots **134**, development robots (similar to unattended robots **134**, but used for development and testing purposes), and nonproduction robots (similar to attended robots **132**, but used for development and testing purposes). Attended robots **132** may be triggered by user events or be scheduled to automatically happen, and operate alongside a human on the same computing system. Attended robots **132** may be used with conductor **120** for a centralized process deployment and logging medium. Attended robots **132** may help the human user accomplish various tasks, and may be triggered by user events. In some embodiments, processes cannot be started from conductor **120** on this type of robot and/or they cannot run under a locked screen. In certain embodiments, attended robots **132** can only be started from a robot tray or from a command prompt. Attended robots **132** should run under human supervision in some embodiments.

Unattended robots **134** run unattended in virtual environments and can automate many processes. Unattended robots **134** may be responsible for remote execution, monitoring, scheduling, and providing support for work queues. Debugging for all robot types may be run from designer **110** in some embodiments. Both attended and unattended robots may automate various systems and applications including, but not limited to, mainframes, web applications, VMs, enterprise applications (e.g., those produced by SAP®, SalesForce®, Oracle®, etc.), and computing system appli-

cations (e.g., desktop and laptop applications, mobile device applications, wearable computer applications, etc.).

Conductor **120** may have various capabilities including, but not limited to, provisioning, deployment, versioning, configuration, queueing, monitoring, logging, and/or providing interconnectivity. Provisioning may include creating and maintenance of connections between robots **130** and conductor **120** (e.g., a web application). Deployment may include assuring the correct delivery of package versions to assigned robots **130** for execution. Versioning may include management of unique instances of some process or configuration in some embodiments. Configuration may include maintenance and delivery of robot environments and process configurations. Queueing may include providing management of queues and queue items. Monitoring may include keeping track of robot identification data and maintaining user permissions. Logging may include storing and indexing logs to a database (e.g., an SQL database) and/or another storage mechanism (e.g., ElasticSearch®, which provides the ability to store and quickly query large datasets). Conductor **120** may provide interconnectivity by acting as the centralized point of communication for third-party solutions and/or applications.

Robots **130** are execution agents that run workflows built in designer **110**. One commercial example of some embodiments of robot(s) **130** is UiPath Robots™. In some embodiments, robots **130** install the Microsoft Windows® Service Control Manager (SCM)-managed service by default. As a result, such robots **130** can open interactive Windows® sessions under the local system account, and have the rights of a Windows® service.

In some embodiments, robots **130** can be installed in a user mode. For such robots **130**, this means they have the same rights as the user under which a given robot **130** has been installed. This feature may also be available for High Density (HD) robots, which ensure full utilization of each machine at its maximum potential. In some embodiments, any type of robot **130** may be configured in an HD environment.

Robots **130** in some embodiments are split into several components, each being dedicated to a particular automation task. The robot components in some embodiments include, but are not limited to, SCM-managed robot services, user mode robot services, executors, agents, and command line. SCM-managed robot services manage and monitor Windows® sessions and act as a proxy between conductor **120** and the execution hosts (i.e., the computing systems on which robots **130** are executed). These services are trusted with and manage the credentials for robots **130**. A console application is launched by the SCM under the local system.

User mode robot services in some embodiments manage and monitor Windows® sessions and act as a proxy between conductor **120** and the execution hosts. User mode robot services may be trusted with and manage the credentials for robots **130**. A Windows® application may automatically be launched if the SCM-managed robot service is not installed.

Executors may run given jobs under a Windows® session (i.e., they may execute workflows. Executors may be aware of per-monitor dots per inch (DPI) settings. Agents may be Windows® Presentation Foundation (WPF) applications that display the available jobs in the system tray window. Agents may be a client of the service. Agents may request to start or stop jobs and change settings. The command line is a client of the service. The command line is a console application that can request to start jobs and waits for their output.

Having components of robots **130** split as explained above helps developers, support users, and computing systems more easily run, identify, and track what each component is executing. Special behaviors may be configured per component this way, such as setting up different firewall rules for the executor and the service. The executor may always be aware of DPI settings per monitor in some embodiments. As a result, workflows may be executed at any DPI, regardless of the configuration of the computing system on which they were created. Projects from designer **110** may also be independent of browser zoom level in some embodiments. For applications that are DPI-unaware or intentionally marked as unaware, DPI may be disabled in some embodiments.

FIG. 2 is an architectural diagram illustrating a deployed RPA system **200**, according to an embodiment of the present invention. In some embodiments, RPA system **200** may be, or may be a part of, RPA system **100** of FIG. 1. It should be noted that the client side, the server side, or both, may include any desired number of computing systems without deviating from the scope of the invention. On the client side, a robot application **210** includes executors **212**, an agent **214**, and a designer **216**. However, in some embodiments, designer **216** may not be running on computing system **210**. Executors **212** are running processes. Several business projects may run simultaneously, as shown in FIG. 2. Agent **214** (e.g., a Windows® service) is the single point of contact for all executors **212** in this embodiment. All messages in this embodiment are logged into conductor **230**, which processes them further via database server **240**, indexer server **250**, or both. As discussed above with respect to FIG. 1, executors **212** may be robot components.

In some embodiments, a robot represents an association between a machine name and a username. The robot may manage multiple executors at the same time. On computing systems that support multiple interactive sessions running simultaneously (e.g., Windows® Server 2012), multiple robots may be running at the same time, each in a separate Windows® session using a unique username. This is referred to as HD robots above.

Agent **214** is also responsible for sending the status of the robot (e.g., periodically sending a “heartbeat” message indicating that the robot is still functioning) and downloading the required version of the package to be executed. The communication between agent **214** and conductor **230** is always initiated by agent **214** in some embodiments. In the notification scenario, agent **214** may open a WebSocket channel that is later used by conductor **230** to send commands to the robot (e.g., start, stop, etc.).

On the server side, a presentation layer (web application **232**, Open Data Protocol (OData) Representative State Transfer (REST) Application Programming Interface (API) endpoints **234**, and notification and monitoring **236**), a service layer (API implementation/business logic **238**), and a persistence layer (database server **240** and indexer server **250**) are included. Conductor **230** includes web application **232**, OData REST API endpoints **234**, notification and monitoring **236**, and API implementation/business logic **238**. In some embodiments, most actions that a user performs in the interface of conductor **220** (e.g., via browser **220**) are performed by calling various APIs. Such actions may include, but are not limited to, starting jobs on robots, adding/removing data in queues, scheduling jobs to run unattended, etc. without deviating from the scope of the invention. Web application **232** is the visual layer of the server platform. In this embodiment, web application **232** uses Hypertext Markup Language (HTML) and JavaScript

(JS). However, any desired markup languages, script languages, or any other formats may be used without deviating from the scope of the invention. The user interacts with web pages from web application **232** via browser **220** in this embodiment in order to perform various actions to control conductor **230**. For instance, the user may create robot groups, assign packages to the robots, analyze logs per robot and/or process, start and stop robots, etc.

In addition to web application **232**, conductor **230** also includes service layer that exposes OData REST API endpoints **234**. However, other endpoints may be included without deviating from the scope of the invention. The REST API is consumed by both web application **232** and agent **214**. Agent **214** is the supervisor of one or more robots on the client computer in this embodiment.

The REST API in this embodiment covers configuration, logging, monitoring, and queueing functionality. The configuration endpoints may be used to define and configure application users, permissions, robots, assets, releases, and environments in some embodiments. Logging REST endpoints may be used to log different information, such as errors, explicit messages sent by the robots, and other environment-specific information, for instance. Deployment REST endpoints may be used by the robots to query the package version that should be executed if the start job command is used in conductor **230**. Queueing REST endpoints may be responsible for queues and queue item management, such as adding data to a queue, obtaining a transaction from the queue, setting the status of a transaction, etc.

Monitoring REST endpoints may monitor web application **232** and agent **214**. Notification and monitoring API **236** may be REST endpoints that are used for registering agent **214**, delivering configuration settings to agent **214**, and for sending/receiving notifications from the server and agent **214**. Notification and monitoring API **236** may also use WebSocket communication in some embodiments.

The persistence layer includes a pair of servers in this embodiment—database server **240** (e.g., a SQL server) and indexer server **250**. Database server **240** in this embodiment stores the configurations of the robots, robot groups, associated processes, users, roles, schedules, etc. This information is managed through web application **232** in some embodiments. Database server **240** may manage queues and queue items. In some embodiments, database server **240** may store messages logged by the robots (in addition to or in lieu of indexer server **250**).

Indexer server **250**, which is optional in some embodiments, stores and indexes the information logged by the robots. In certain embodiments, indexer server **250** may be disabled through configuration settings. In some embodiments, indexer server **250** uses ElasticSearch®, which is an open source project full-text search engine. Messages logged by robots (e.g., using activities like log message or write line) may be sent through the logging REST endpoint(s) to indexer server **250**, where they are indexed for future utilization.

FIG. 3 is an architectural diagram illustrating the relationship **300** between a designer **310**, activities **320**, **330**, and drivers **340**, according to an embodiment of the present invention. Per the above, a developer uses designer **310** to develop workflows that are executed by robots. Workflows may include user-defined activities **320** and UI automation activities **330**. Some embodiments are able to identify non-textual visual components in an image, which is called computer vision (CV) herein. Some CV activities pertaining to such components may include, but are not limited to,

click, type, get text, hover, element exists, refresh scope, highlight, etc. Click in some embodiments identifies an element using CV, optical character recognition (OCR), fuzzy text matching, and multi-anchor, for example, and clicks it. Type may identify an element using the above and types in the element. Get text may identify the location of specific text and scan it using OCR. Hover may identify an element and hover over it. Element exists may check whether an element exists on the screen using the techniques described above. In some embodiments, there may be hundreds or even thousands of activities that can be implemented in designer 310. However, any number and/or type of activities may be available without deviating from the scope of the invention.

UI automation activities 330 are a subset of special, lower level activities that are written in lower level code (e.g., CV activities) and facilitate interactions with the screen. UI automation activities 330 facilitate these interactions via drivers 340 that allow the robot to interact with the desired software. For instance, drivers 340 may include OS drivers 342, browser drivers 344, VM drivers 346, enterprise application drivers 348, etc.

Drivers 340 may interact with the OS at a low level looking for hooks, monitoring for keys, etc. They may facilitate integration with Chrome®, IE®, Citrix®, SAP®, etc. For instance, the “click” activity performs the same role in these different applications via drivers 340.

FIG. 4 is an architectural diagram illustrating an RPA system 400, according to an embodiment of the present invention. In some embodiments, RPA system 400 may be or include RPA systems 100 and/or 200 of FIGS. 1 and/or 2. RPA system 400 includes multiple client computing systems 410 running robots. Computing systems 410 are able to communicate with a conductor computing system 420 via a web application running thereon. Conductor computing system 420, in turn, is able to communicate with a database server 430 and an optional indexer server 440.

With respect to FIGS. 1 and 3, it should be noted that while a web application is used in these embodiments, any suitable client/server software may be used without deviating from the scope of the invention. For instance, the conductor may run a server-side application that communicates with non-web-based client software applications on the client computing systems.

FIG. 5 is an architectural diagram illustrating a computing system 500 configured to execute automation windows for RPA, according to an embodiment of the present invention. In some embodiments, computing system 500 may be one or more of the computing systems depicted and/or described herein. Computing system 500 includes a bus 505 or other communication mechanism for communicating information, and processor(s) 510 coupled to bus 505 for processing information. Processor(s) 510 may be any type of general or specific purpose processor, including a Central Processing Unit (CPU), an Application Specific Integrated Circuit (ASIC), a Field Programmable Gate Array (FPGA), a Graphics Processing Unit (GPU), multiple instances thereof, and/or any combination thereof. Processor(s) 510 may also have multiple processing cores, and at least some of the cores may be configured to perform specific functions. Multi-parallel processing may be used in some embodiments. In certain embodiments, at least one of processor(s) 510 may be a neuromorphic circuit that includes processing elements that mimic biological neurons. In some embodiments, neuromorphic circuits may not require the typical components of a Von Neumann computing architecture.

Computing system 500 further includes a memory 515 for storing information and instructions to be executed by processor(s) 510. Memory 515 can be comprised of any combination of Random Access Memory (RAM), Read Only Memory (ROM), flash memory, cache, static storage such as a magnetic or optical disk, or any other types of non-transitory computer-readable media or combinations thereof. Non-transitory computer-readable media may be any available media that can be accessed by processor(s) 510 and may include volatile media, non-volatile media, or both. The media may also be removable, non-removable, or both.

Additionally, computing system 500 includes a communication device 520, such as a transceiver, to provide access to a communications network via a wireless and/or wired connection. In some embodiments, communication device 520 may be configured to use Frequency Division Multiple Access (FDMA), Single Carrier FDMA (SC-FDMA), Time Division Multiple Access (TDMA), Code Division Multiple Access (CDMA), Orthogonal Frequency Division Multiplexing (OFDM), Orthogonal Frequency Division Multiple Access (OFDMA), Global System for Mobile (GSM) communications, General Packet Radio Service (GPRS), Universal Mobile Telecommunications System (UMTS), cdma2000, Wideband CDMA (W-CDMA), High-Speed Downlink Packet Access (HSDPA), High-Speed Uplink Packet Access (HSUPA), High-Speed Packet Access (HSPA), Long Term Evolution (LTE), LTE Advanced (LTE-A), 802.11x, Wi-Fi, Zigbee, Ultra-WideBand (UWB), 802.16x, 802.15, Home Node-B (HnB), Bluetooth, Radio Frequency Identification (RFID), Infrared Data Association (IrDA), Near-Field Communications (NFC), fifth generation (5G), New Radio (NR), any combination thereof, and/or any other currently existing or future-implemented communications standard and/or protocol without deviating from the scope of the invention. In some embodiments, communication device 520 may include one or more antennas that are singular, arrayed, phased, switched, beamforming, beam-steering, a combination thereof, and/or any other antenna configuration without deviating from the scope of the invention.

Processor(s) 510 are further coupled via bus 505 to a display 525, such as a plasma display, a Liquid Crystal Display (LCD), a Light Emitting Diode (LED) display, a Field Emission Display (FED), an Organic Light Emitting Diode (OLED) display, a flexible OLED display, a flexible substrate display, a projection display, a 4K display, a high definition display, a Retina® display, an In-Plane Switching (IPS) display, or any other suitable display for displaying information to a user. Display 525 may be configured as a touch (haptic) display, a three dimensional (3D) touch display, a multi-input touch display, a multi-touch display, etc. using resistive, capacitive, surface-acoustic wave (SAW) capacitive, infrared, optical imaging, dispersive signal technology, acoustic pulse recognition, frustrated total internal reflection, etc. Any suitable display device and haptic I/O may be used without deviating from the scope of the invention.

A keyboard 530 and a cursor control device 535, such as a computer mouse, a touchpad, etc., are further coupled to bus 505 to enable a user to interface with computing system 500. However, in certain embodiments, a physical keyboard and mouse may not be present, and the user may interact with the device solely through display 525 and/or a touchpad (not shown). Any type and combination of input devices may be used as a matter of design choice. In certain embodiments, no physical input device and/or display is

**11**

present. For instance, the user may interact with computing system **500** remotely via another computing system in communication therewith, or computing system **500** may operate autonomously.

Memory **515** stores software modules that provide functionality when executed by processor(s) **510**. The modules include an operating system **540** for computing system **500**. The modules further include an automation window module **545** that is configured to perform all or part of the processes described herein or derivatives thereof. Computing system **500** may include one or more additional functional modules **550** that include additional functionality.

One skilled in the art will appreciate that a “system” could be embodied as a server, an embedded computing system, a personal computer, a console, a personal digital assistant (PDA), a cell phone, a tablet computing device, a quantum computing system, or any other suitable computing device, or combination of devices without deviating from the scope of the invention. Presenting the above-described functions as being performed by a “system” is not intended to limit the scope of the present invention in any way, but is intended to provide one example of the many embodiments of the present invention. Indeed, methods, systems, and apparatuses disclosed herein may be implemented in localized and distributed forms consistent with computing technology, including cloud computing systems.

It should be noted that some of the system features described in this specification have been presented as modules, in order to more particularly emphasize their implementation independence. For example, a module may be implemented as a hardware circuit comprising custom very large scale integration (VLSI) circuits or gate arrays, off-the-shelf semiconductors such as logic chips, transistors, or other discrete components. A module may also be implemented in programmable hardware devices such as field programmable gate arrays, programmable array logic, programmable logic devices, graphics processing units, or the like.

A module may also be at least partially implemented in software for execution by various types of processors. An identified unit of executable code may, for instance, include one or more physical or logical blocks of computer instructions that may, for instance, be organized as an object, procedure, or function. Nevertheless, the executables of an identified module need not be physically located together, but may include disparate instructions stored in different locations that, when joined logically together, comprise the module and achieve the stated purpose for the module. Further, modules may be stored on a computer-readable medium, which may be, for instance, a hard disk drive, flash device, RAM, tape, and/or any other such non-transitory computer-readable medium used to store data without deviating from the scope of the invention.

Indeed, a module of executable code could be a single instruction, or many instructions, and may even be distributed over several different code segments, among different programs, and across several memory devices. Similarly, operational data may be identified and illustrated herein within modules, and may be embodied in any suitable form and organized within any suitable type of data structure. The operational data may be collected as a single data set, or may be distributed over different locations including over different storage devices, and may exist, at least partially, merely as electronic signals on a system or network.

## Attended Automation for Users (Runtime)

Per the above, in attended automation, a robot works alongside a user on the same computing system. Since

**12**

robots in RPA often interact with the computing system in a similar manner (e.g., generating mouse click and key press events, simulating these events via APIs (e.g., using window messages), etc.), some embodiments create a second session to host and run attended automations therein. Unlike existing RPA systems, users can benefit from the ability to interact with their computing system while the robot is running attended automations in the second session. The user may still monitor what the robot is doing and interact with the robot through the host automation window for the second session. This effectively evolves the RPA robot from merely doing tasks faster and more reliably than the user to becoming a true digital assistant that can perform work in parallel with the user, providing an even greater productivity boost. In some embodiments, the first and second session may be running on a remote machine that is controlled by the user’s computing system.

In certain embodiments, the RPA robot may be running on a user’s computing system and driving a remote computing system through the remote runtime (e.g., via UiPath Remote Runtime™). UiPath Remote Runtime™ is a component that facilitates the communication between a remote application or desktop, such as Citrix Virtual Apps and Desktops™, and the dedicated UiPath® extension (e.g., the UiPath® extension for Citrix® or the UiPath® extension for Windows® Remote Desktop). UiPath Remote Runtime™ gathers information pertaining to targeted UI elements of remote applications and sends this information to the corresponding extension so that selectors are natively generated in UI Explorer™.

As stated previously, the user and the robot are both interacting with the same application instances and file system. FIG. 6 illustrates some applications of a user computing system **600** running a user session **610** and an attended automation robot session **620** with some applications also running on user computing system **600**, according to an embodiment of the present invention. As can be seen in FIG. 6, web browser application **630**, spreadsheet application **640**, and email application **650** are accessible by both user session **610** and attended automation robot session **620**. User session **610** and attended automation robot session **620** can interact with web browser application **630** and email application **650** at the same time.

However, when the robot is interacting with the same file of a spreadsheet application **640**, the user cannot interact with this application (e.g., the user may only be able to open a “read only” view or the user may be prevented from opening the file entirely). The user may receive a message indicating that spreadsheet application **640** is locked, is being accessed by another “user” (i.e., the robot), etc. Both user session **610** and attended automation robot session **620** can also interact with file system **660**. Thus, changes made via the robot and the user in an application via their respective sessions will be made as if a single user made them, rather than having the user and the robot each work with separate versions of the applications and file systems.

FIGS. 7A-K are screenshots illustrating an example of separate sessions for a user and a robot for RPA, according to an embodiment of the present invention. In FIG. 7A, a user session window **700** is shown, where a user is able to interact with applications in the UI and no robot is currently executing. In FIG. 7B, the user pulls up a robot tray **710** (e.g., by clicking an icon at the bottom right of the screen) and selects a robot to execute on his or her computing system. After selecting the robot to be executed, as shown in

FIG. 7C, a robot session window 720 appears as a child window on the screen. The robot will operate in robot session window 720.

Turning to FIGS. 7D and 7E (which is an enlarged view of a portion of FIG. 7D), in this example, the robot launches the Microsoft Notepad® application 730 and begins entering text 732 therein. While this is occurring, the user can interact with applications in user session window 700, move, resize, or minimize robot session window 720, etc. As shown in FIG. 7F, robot tray 710 indicates that the robot is running.

In FIG. 7G, the user has opened Google Chrome® within user session window 700. Robot session window 720 is visible in the foreground. In FIG. 7H and the enlarged portion thereof shown in FIG. 7I, as the user navigates the web using Google Chrome®, the robot continues to enter text 732 in Microsoft Notepad® application 730 in parallel with the user's web navigation.

FIG. 7J illustrates UiPath Studio™ 740 with part of an RPA workflow 750 for the robot. As can be seen in FIG. 7K, a developer is able to step through RPA workflow 750 using UiPath Studio™ 740. UiPath Studio™ 740 and robot session window 720 are both visible in user session window 700. With each step, text 732 is entered in Microsoft Notepad® application 730.

FIG. 8 is a flowchart illustrating a process 800 for enabling a robot and a user to operate a computing system simultaneously using attended automation windows, according to an embodiment of the present invention. The process begins with launching a user session window at 810. This may be the main window associated with the operating system running on the user computing system, for example. A robot session window is then launched as a child window of the user session window at 820. In some embodiments, the robot session window may be launched responsive to the robot being initiated or otherwise launched, for example. The robot is then initiated in the robot session at 830 and the robot executes its workflow in the robot session at 840. In some embodiments, the robot session is ended and the robot session window is closed automatically at 850.

In some embodiments, the child session may be created via a child session API of the operating system. Windows® Terminal Services Child Sessions or another child session API provided by an operating system may be used in some embodiments to create the second session without deviating from the scope of the invention. The robot tray application (e.g., the UiPath® Robot Agent Desktop) may then use the create process APIs in the operating system with the appropriate arguments to start the robot process in that child session. The robot tray application may then communicate with the robot process using a suitable protocol (e.g., one built on named pipes).

Communication with the robot between the two sessions may be accomplished using IPC protocols. These protocols may facilitate communication via the network, pipes, Component Object Model (COM), Remote Procedure Calls (RPC), sockets, etc. Suitable session creation mechanisms and IPC protocols may be used for other operating systems as well, where supported. When the user clicks a button on the robot tray, the robot tray application may send that command to the robot process using the IPC protocol. The robot may send status notifications back to the robot tray application (e.g., indicating that the robot is starting, running, paused, etc.) via the IPC protocol as well.

#### Attended Automation for RPA Developers (Design Time)

In some embodiments, an attended automation window may create a second session to host and run attended automations therein for the purposes of testing and debug-

ging automations when used from a development environment at design time. This may enable RPA developers to ensure that attended automations running inside the robot attended automation window behave as intended.

RPA developers may also use this functionality to create attended automations that provide a smooth experience where users can access applications as desired while the robot is running. If an attended automation makes it difficult for a user to interact with his or her computing system while running, or if it is difficult for RPA developers who launch the attended automation from an integrated development environment (IDE) to view and access the IDE while the attended automation is running, it may be desirable for the RPA developer to modify the robot to run in a less intrusive manner. For example, if the automation brings an application to the foreground in front of the IDE, the developer loses the ability to view the logging information streaming from the process in real time. The RPA developer may thus change launch settings from the IDE so this does not occur.

FIG. 9 is a flowchart illustrating a process 900 for enabling a robot and an RPA developer to operate a computing system simultaneously using attended automation windows, according to an embodiment of the present invention. The process begins with launching a developer session window at 910. This may be the main window associated with the operating system running on the RPA developer computing system, for example. Next, an IDE is launched at 920, and the RPA developer issues a command to start the attended automation at 930. This causes the robot session window to launch at 940 and the robot is initialized in the robot session at 950. The robot then executes its workflow in the robot session at 960 to carry out the attended automation logic. If the developer is not satisfied with the operation of the robot, the developer may command execution to stop in the IDE, which ends the robot session and closes the robot session window at 970. The process then returns to step 930.

#### Automation Monitoring for RPA

In some embodiments, the second session may be used for automation monitoring and troubleshooting. For instance, an operations engineer responsible for a server that is hosting unattended automations (i.e., there is no licensing requirement or expectation by the automation process that a user is monitoring execution) may desire to intervene to correct errors. The operations engineer may do this via the second session window. For instance, the operations engineer may step in and kill operation of the robot(s) where errors are occurring.

In some embodiments, the operations engineer may access the computing system using a remote desktop technology. For example, the operations engineer may be logged into the computing system (e.g., a production machine) and able to see the user interface thereof on his or her own computing system. Thus, the operations engineer may be able to see the UI and control the remote computing system as desired.

The robot may be running and controlling the UI in the second session on a production machine. This means that the operations engineer is freed to do things like monitor the streaming logs coming from the robot and visually monitor a UI being driven by the robot (if any) without losing control of the machine. Because the robot control software is running in the first or parent session, if a problem occurs, the engineer is able to pause/terminate/resume execution from the parent session that he or she is logged into. In some

**15**

embodiments, the robot may be running in the parent session and the monitoring may be performed from the child session.

The Microsoft® Universal Windows Platforms (UWP) Simulator provides the ability to simulate behaviors such as geolocation, multi-touch, rotation, etc. Such behaviors can be difficult or impossible to test on a developer machine. For instance, if the developer wants to test behaviors of an application that depends on different locations, such as a map program, it is highly inconvenient for the developer to carry his or her computer around the country or world for testing. Rather than being focused on isolating “UI takeover” from the user, or being exclusively related to RPA, UWP applications are single applications contained in a single window. As such, the need to isolate UI control should not be an issue. The UWP simulator therefore may solve the “simulation scenarios” for a single application.

FIG. 10 is a flowchart illustrating a process 1000 for performing attended or unattended automation using automation windows for users, according to an embodiment of the present invention. The process begins with launching a child session window and a child session at 1010. The child session is a child of a parent session for an operating system and the child window is located within a parent window of the parent session. An RPA robot is initialized in the child session as a process at 1020 and the RPA robot is executed at 1030. During execution, the RPA robot executes an RPA workflow including a plurality of activities within the child session window. The parent session and the child session have access to a common file system.

If the user attempts to access the same application as the RPA robot at 1040, a message is displayed to the user in the parent session window at 1050 indicating that the RPA robot is currently accessing the application. The child session is automatically ended and the child session window is automatically closed after the RPA robot completes execution of the RPA workflow at 1060. Steps 1010-1060 may be repeated for any desired number of robots executing in child sessions in serial or in parallel.

In some embodiments, when executing the plurality of activities in the RPA workflow, the RPA robot interacts with one or more common applications running on a computing system that are accessible via both the parent session and the child session. In certain embodiments, the RPA robot is an attended robot and a user interacting with an instance of an application via the parent session does not interfere with the RPA robot interacting with a different instance of the application or an instance of a different application via the child session. In some embodiments, the child session window is launched from a robot tray application in the parent session window. In certain embodiments, communication between the robot tray application and the RPA robot is accomplished using an IPC protocol and the robot tray application is configured to send commands to the RPA robot process via the IPC protocol. In some embodiments, the RPA robot is configured to send status notifications to the robot tray application via the IPC protocol.

In some embodiments, the parent and child sessions are launched at design time, the RPA robot performs an attended automation, and an IDE application executes on a computing system associated with the parent session and is configured to initiate the attended automation. In certain embodiments, the parent session and the child session run on different computing systems. In some embodiments, the parent window, the child window, or both, include a window representing a UI displayed within a main UI, a second

**16**

screen of a second display of a computing system, a virtual desktop, or an isolated environment.

In some embodiments, the RPA robot is an attended robot and the RPA robot is initialized and executed in the parent session while a user interacts with the parent session. In certain embodiments, the launching of the child session window and the child session, the initialization of the RPA robot in the child session, and the execution of the RPA robot are performed via a remote computing system. In some embodiments, the RPA robot is an unattended robot.

FIG. 11 is a flowchart illustrating a process 1100 for performing attended or unattended automation using automation windows for RPA developers, according to an embodiment of the present invention. The process begins with launching a child session window and a child session from an IDE at 1110. The child session is a child of a parent session for an operating system and the child window is located within a parent window of the parent session. An RPA robot is initialized in the child session as a process at 1120 and the RPA robot is executed at 1130. During execution, the RPA robot executes an RPA workflow including a plurality of activities within the child session window. The parent session and the child session have access to a common file system.

Status messages are received from the RPA robot during robot operation and the received status messages are displayed in the IDE at 1140. If the robot is not operating as intended, a user (e.g., an RPA developer) may wish to end its operation. When the user provides a command to terminate operation of the RPA robot, operation of the RPA robot, the child session, and the child window is terminated by the IDE.

FIG. 12 is a flowchart illustrating a process 1200 for performing automation monitoring, according to an embodiment of the present invention. The process begins with initializing and executing a monitoring and troubleshooting application in a parent session associated with a computing system at 1210. A child session window and a child session are launched at 1220. The child session is a child of the parent session for an operating system.

An unattended RPA robot is initialized and executed in the child session as a process at 1230. A command is received from a user of the monitoring and troubleshooting application to terminate operation of the unattended RPA robot at 1240. Operation of the unattended RPA robot is then paused or terminated at 1250 and the child session and child session window are killed at 1260 responsive to receiving the command. The parent session and the child session have access to a common file system.

In some embodiments, the child session window is displayed on a different computing system than the parent session is executing on. In certain embodiments, when executing a plurality of activities in an RPA workflow, the unattended RPA robot interacts with one or more common applications that are accessible via both the parent session and the child session. In some embodiments, the interactions of the user with an instance of an application via the parent session does not interfere with the unattended RPA robot interacting with a different instance of the application or an instance of a different application via the child session. In certain embodiments, the child session is automatically ended and the child session window is automatically closed after the unattended RPA robot completes execution of an RPA workflow.

In some embodiments, any desired number of additional robots may be executed in respective child sessions in serial or in parallel with that of step 1220. In certain embodiments,

when the user attempts to interact with an application that the unattended RPA robot is interacting with, a message may be displayed to the user in the parent session window indicating that the unattended RPA robot is currently accessing the application. In some embodiments, the parent session and the child session run on different computing systems. In certain embodiments, the parent window, the child window, or both, comprise a window representing a UI displayed within a main UI, a second screen of a second display of a computing system, a virtual desktop, or an isolated environment. In some embodiments, the launching of the child session window and the child session, the initialization of the unattended RPA robot in the child session, and the execution of the unattended RPA robot are performed via a remote computing system.

The process steps performed in FIGS. 8-12 may be performed by a computer program, encoding instructions for the processor(s) to perform at least part of the process(es) described in FIGS. 8-12, in accordance with embodiments of the present invention. The computer program may be embodied on a non-transitory computer-readable medium. The computer-readable medium may be, but is not limited to, a hard disk drive, a flash device, RAM, a tape, and/or any other such medium or combination of media used to store data. The computer program may include encoded instructions for controlling processor(s) of a computing system (e.g., processor(s) 510 of computing system 500 of FIG. 5) to implement all or part of the process steps described in FIGS. 8-12, which may also be stored on the computer-readable medium.

The computer program can be implemented in hardware, software, or a hybrid implementation. The computer program can be composed of modules that are in operative communication with one another, and which are designed to pass information or instructions to display. The computer program can be configured to operate on a general purpose computer, an ASIC, or any other suitable device.

It will be readily understood that the components of various embodiments of the present invention, as generally described and illustrated in the figures herein, may be arranged and designed in a wide variety of different configurations. Thus, the detailed description of the embodiments of the present invention, as represented in the attached figures, is not intended to limit the scope of the invention as claimed, but is merely representative of selected embodiments of the invention.

The features, structures, or characteristics of the invention described throughout this specification may be combined in any suitable manner in one or more embodiments. For example, reference throughout this specification to “certain embodiments,” “some embodiments,” or similar language means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, appearances of the phrases “in certain embodiments,” “in some embodiment,” “in other embodiments,” or similar language throughout this specification do not necessarily all refer to the same group of embodiments and the described features, structures, or characteristics may be combined in any suitable manner in one or more embodiments.

It should be noted that reference throughout this specification to features, advantages, or similar language does not imply that all of the features and advantages that may be realized with the present invention should be or are in any single embodiment of the invention. Rather, language referring to the features and advantages is understood to mean that a specific feature, advantage, or characteristic described

in connection with an embodiment is included in at least one embodiment of the present invention. Thus, discussion of the features and advantages, and similar language, throughout this specification may, but do not necessarily, refer to the same embodiment.

Furthermore, the described features, advantages, and characteristics of the invention may be combined in any suitable manner in one or more embodiments. One skilled in the relevant art will recognize that the invention can be practiced without one or more of the specific features or advantages of a particular embodiment. In other instances, additional features and advantages may be recognized in certain embodiments that may not be present in all embodiments of the invention.

One having ordinary skill in the art will readily understand that the invention as discussed above may be practiced with steps in a different order, and/or with hardware elements in configurations which are different than those which are disclosed. Therefore, although the invention has been described based upon these preferred embodiments, it would be apparent to those of skill in the art that certain modifications, variations, and alternative constructions would be apparent, while remaining within the spirit and scope of the invention. In order to determine the metes and bounds of the invention, therefore, reference should be made to the appended claims.

The invention claimed is:

**1. A computer-implemented method for automation monitoring in robotic process automation (RPA), comprising:**  
 initializing and executing a monitoring and troubleshooting application in a window;  
 initializing and executing an unattended RPA robot;  
 receiving a command to pause or terminate operation of the unattended RPA robot;  
 pausing or terminating the operation of the unattended RPA robot responsive to receiving the command; and  
 closing the window after receiving the command to terminate operation of the unattended RPA robot,  
 wherein  
 during execution of a plurality of activities in an RPA workflow, the unattended RPA robot interacts with one or more common applications that are accessible via a plurality of sessions, and  
 interaction of a user with an instance of an application of the one or more common applications does not interfere with the unattended RPA robot interacting with a different instance of the application or an instance of a different application.

**2. The computer-implemented method of claim 1, further comprising:**  
 terminating a session associated with the monitoring and troubleshooting application after receiving the command to terminate operation of the unattended RPA robot.

**3. The computer-implemented method of claim 1,** wherein the unattended RPA robot operates in a first session and the monitoring and troubleshooting application operates in a second session.

**4. The computer-implemented method of claim 1,** wherein the window is displayed on a different computing system than the unattended RPA robot is executing on.

**5. The computer-implemented method of claim 1, further comprising:**  
 automatically closing the window after the unattended RPA robot completes execution of an RPA workflow.

**6. The computer-implemented method of claim 1,** wherein the command to pause or terminate operation of the

**19**

unattended RPA robot is initiated by a user of the monitoring and troubleshooting application.

7. The computer-implemented method of claim 1, wherein responsive to a user attempting to interact with an application that the unattended RPA robot is interacting with, the method further comprises:

displaying a message to the user indicating that the unattended RPA robot is currently accessing the application.

8. The computer-implemented method of claim 1, wherein the window represents a user interface (UI) displayed within a main UI, a second screen of a second display of a computing system, a virtual desktop, or an isolated environment.

9. The computer-implemented method of claim 1, wherein the initialization of the unattended RPA robot and the execution of the unattended RPA robot are performed via a remote computing system.

10. A non-transitory computer-readable medium storing a computer program for automation monitoring in robotic process automation (RPA), the computer program configured to cause at least one processor to:

initialize and execute a monitoring and troubleshooting application in a window;

initialize and execute an unattended RPA robot as a process;

receive a command to pause or terminate operation of the unattended RPA robot;

pause or terminate the operation of the unattended RPA

robot responsive to receiving the command; and

close the window after receiving the command to terminate operation of the unattended RPA robot, wherein during execution of a plurality of activities in an RPA

workflow, the unattended RPA robot interacts with one or more common applications that are accessible via a plurality of sessions, and

interaction of a user with an instance of an application of the one or more common applications does not interfere with the unattended RPA robot interacting with a different instance of the application or an instance of a different application.

11. The non-transitory computer-readable medium of claim 10, wherein the computer program instructions are further configured to cause the at least one processor to:

**20**

terminate a session associated with the monitoring and troubleshooting application after receiving the command to terminate operation of the unattended RPA robot.

12. The non-transitory computer-readable medium of claim 10, wherein the unattended RPA robot operates in a first session and the monitoring and troubleshooting application operates in a second session.

13. The non-transitory computer-readable medium of claim 10, wherein the computer program instructions are further configured to cause the at least one processor to:

automatically close the window after the unattended RPA robot completes execution of an RPA workflow.

14. A computing system, comprising:  
memory storing computer program instructions for automation monitoring in robotic process automation (RPA); and

at least one processor configured to execute the computer program instructions, wherein the computer program instructions are configured to cause the at least one processor to:

execute a monitoring and troubleshooting application in a window;

execute an unattended RPA robot as a process;  
receive a command to pause or terminate operation of the unattended RPA robot;

pause or terminate the operation of the unattended RPA robot responsive to receiving the command; and  
close the window after receiving the command to terminate operation of the unattended RPA robot,  
wherein

during execution of a plurality of activities in an RPA workflow, the unattended RPA robot interacts with one or more common applications that are accessible via a plurality of sessions, and

interaction of a user with an instance of an application of the one or more common applications does not interfere with the unattended RPA robot interacting with a different instance of the application or an instance of a different application.

15. The computing system of claim 14, wherein the computer program instructions are further configured to cause the at least one processor to:

automatically close the window after the unattended RPA robot completes execution of an RPA workflow.

\* \* \* \* \*