11

BASIC CUTTING AND TAILORING

11.1 INTRODUCTION

The fitting of every garment depends upon the way in which it has been cut and tailored. And it is essential to have a good drafting and paper pattern. It is important to do a layout of the pattern in order to stitch garments of various designs according to the prevalent fashion and also for the effective utilisation of the cloth. Lay out is generally used in factories and a good worker must know have to do a layout. In this lesson let us learn about layout. its need, principles and precautions while doing a lay out.

11.2 OBJECTIVES

After reading this lesson, you will be able to :

- explain the need for a layout;
- list precautions to be observed while doing a layout;
- demonstrate the methods of doing layouts..

11.3 WHAT IS A LAY OUT

Meaning

The marks made on the cloth by laying out the paper pattern keeping in mind the allowances for the optimum utilisation of cloth, is known as lay out.

11.4 NEED

Wastage of cloth can be avoided by doing a lay out. When the cloth is less, it can best be used by laying out the pattern. Similarly, any spots on the cloth can be avoided by lay out.

Lay out helps to save money. By doing a lay out we know exactly how the garment will be cut hence there is no wastage.

The checks and print can be matched while doing a lay out which saves time later on.

Lay out helps in accurate cloth estimation for any garment.

11.5 MARKING

Method of lay out


First of all, notches and balance marks are made on the pattern which has been cut according to the measurements. Lay out is the best way of saving cloth and also helps in accurate cloth estimation.


Lay the pattern on the folded cloth. If the garment is to be front open, then lay the front piece of the pattern along the selvedge and the back piece on the fold. Mark adequate allowances and turning after laying the front piece. Do the same for the back piece. After that lay the sleeve and keep margins all round. In this way the cloth will be cut only after the entire germent is laid out. Other strips and bias is cut from the left over pieces of cloth.

If a design is to be added or a joint is to be shown on the pattern, it must be kept in mind before hand. In this way, we see that layout helps us to save time and cloth.

11.6 PRECAUTIONS WHILE LAYING OUT

1. Layout should always be done on the wrong side. Be careful to place right side together.
2. It is always better to shrink the fabric and then iron it before doing a layout.
3. Fix the cloth on the table and then lay out the pattern and mark it on the cloth. Then mark the allowances, balance marks, design, etc.

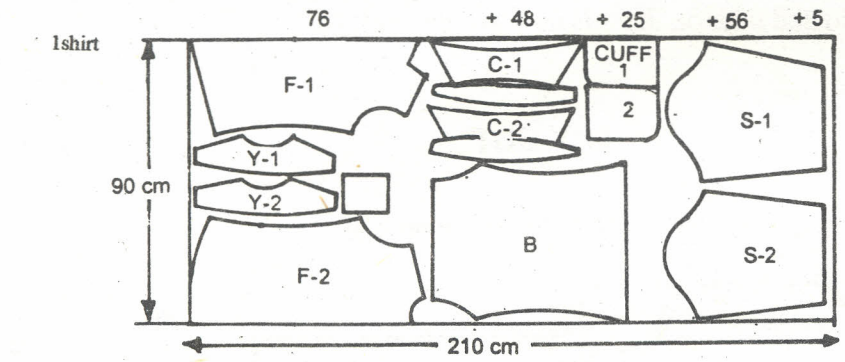

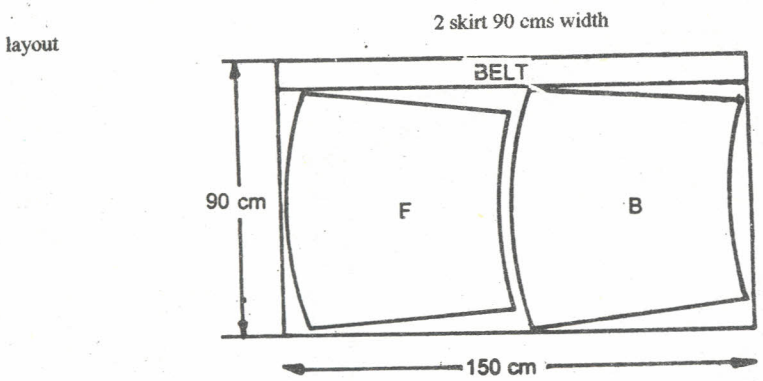

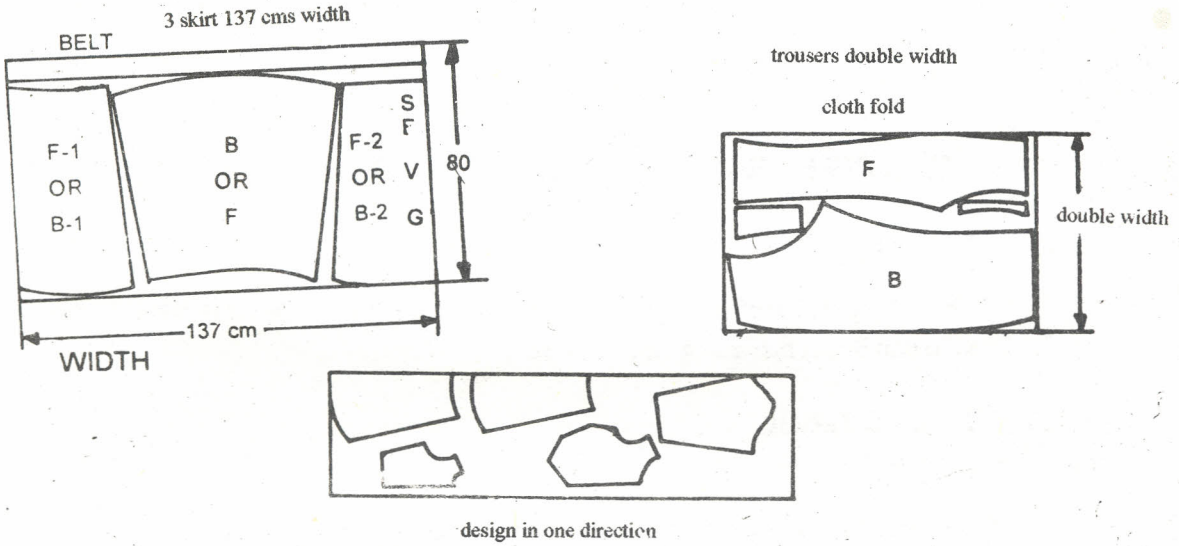


Fig 11.1 Lay out

4. Some garments have parts which are cut on a cross grain, like the collar, yoke and cuffs in a gents shirt. Care should be taken to mark these pieces on the cross grain so that later on there is no wastage of cloth.

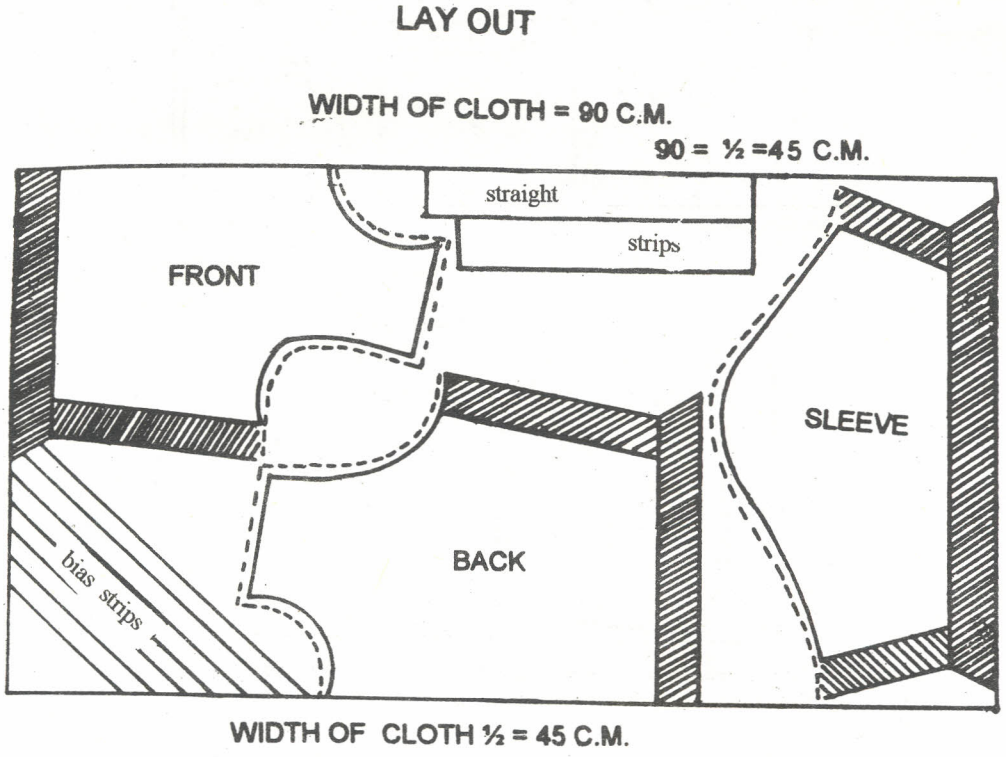


Fig 11.2 Lay out

PRECAUTIONS FOR LAYING OUT ON DIFFERENT FABRICS

1. Plain fabric

One has to be careful about the right and wrong side of plain fabrics. The right side can be identified by the selvedge.

2. Printed fabric

Extra care has to be taken while doing a layout on printed fabrics. Prints may be one way prints or all over prints. Care should be taken to see that all lengthwise pieces are laid out in the same direction specially in one way prints.

3. Striped fabric

One should be careful about the right and wrong side of fabric as well as the direction of the stripes. If there are uneven stripes then the stripes should be matched. If a pocket is to be put on a gents shirt then care should be taken that strips match exactly.

4. Piled fabric

Fabrics like velvet and shaneel are piled fabrics. Care should be taken about the direction of the pile while doing the layout on such fabrics. If the different part of the garment are cut with different pile directions, the resultant garment will not look good as the light will be reflected in different directions.

11.7 PRINCIPLE OF LAY OUT

1. Check all the components of the paper pattern.
2. Lay out the larger parts first and then the smaller ones.
3. The grain line of the pattern should be laid on the grain line of the fabric.
4. Adequate margin should be kept between pieces so that they can be cut easily.
5. Use pins or weights to keep the components of the paper pattern in place.
6. Mark the outline of the paper pattern along the edge of he pattern with a chalk.
7. Mark the darts, balance marks, turning and seam allowance on the cloth.

INTEXT QUESTIONS 11.1

Fill in the blanks

1. Layout should be done one the ..... side of the fabric.
2. Some parts of gents shirt are cut on the ..... grain.
3. Layout is done after making the .....
4. ..... on the fabric can be avoided by layout.
5. ..... are kept after laying out all the components of the pattern.

11.8 MARGINS

After the lay out, margins are kept for turnings, seams, etc. These are as follows -

Inlays

The cloth kept outside the construction line is known as inlay.

Turning

The cloth kept beyond the full length in order to turn it in and finish the edge is known as 'turning allowance'. For example - the round button turning in pants, the round sleeve turning in shirts, the lower edge turning in frocks, etc.

Margin

The cloth kept apart from seam allowance is known as margin. It is kept at the sides, e.g. in ladies shirt or in frocks. This margin is kept so that the seam can be opened to increase the size of the garment, if needed.

Seam allowance

This is the cloth kept for the seams. If the seam allowance has not been marked on the paper pattern it is marked on the cloth when the pattern is laid out. The seam allowance may be more or less according to the cloth available.

11.9 FINISHING

Finishing refers to neatening the sewed edges by trimming the loose threads and then pressing. In order to finish a garment the whole should be inspected after completion to see which parts need ironing. The garment should be turned inside out to see that all tacked areas have been sewn properly and the tacks removed. Shake the garment well so that any loose threads sticking to it are shaken out. If necessary, they may be brushed out with the help of a brush. If paper has been used during garment construction that too must be carefully removed.

A second inspection of the garment should be done after finishing it to see that no part has been left unstitched or if the seam at any place is so near the edge that it is likely to fray very soon. Corrective measures should be taken in such cases.

The last stage in finishing is pressing the garment properly so that it looks attractive. Hence, finishing a garment after stitching is very important.

11.10 WHAT YOU HAVE LEARNT

In this lesson you have learnt about the meaning of layout, its need and method of doing a layout. You have learnt about precautions to be observed while laying out and the meaning of inlay, turning, seam allowance and margin.

11.11 TERMINAL EXERCISE

1. How is layout done on cloth?
2. Describe the precautions to be observed while doing layout.
3. Distinguish between
   i) Inlays and turning
   ii) Margin and seam allowance

11.12 ANSWER TO INTEXT QUESTIONS

11.1 1. Wrong
2. Cross
3. Pattern
4. Spots
5. Margin.