

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china



Corn Husker

Model: TPJ06T

Auxiliary Power: Small four-wheel tractor with over 2.2kw, electromotor, engine, walking tractor and tricycle

Total Weight: 236kg

Overall Dimensions: 2,010*828*936 (mm) (L*W*H)

Rotating Speed of Power Input Shaft: 300~500r/min

Connection and Driving Mode: Able to connect with small four-wheel tractor, electromotor, engine, walking tractor and tricycle, driven by triangle belt

Work Efficiency: 6~7mu/hour

Threshing Rate: Not less than 98% in bract dry and yellow period; not less than 92% in green husk or semi-yellow period

FOB QINGDAO PRICE:US\$1100/SET



The round Hay baler machine

Model	M0850	M0870
Grass bundle dimension (Diameter × width)	φ50×70cm	φ61×70cm
Overall dimension (L×W×H)	115×130×120cm	130×130×135cm
Weight	390kg	440 kg
Working width	80cm	80cm
Working speed	2-5 kilometer / hour	2-5 kilometer / hour
Tyre specification	16×6.50-8-4PR	16×6.50-8-4PR

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Matched power	25-50 HP tractor	25-50 HP tractor
Matched PTO	540 Rotary/minute	540 Rotary/minute
FOB QINGDAO PRICE(US\$)	US\$ 2600SET	US\$2850 SET
40' FCL CONTAINER	40 SETS	32 SETS

The next page is the square hay baler machine information

Square Hay Baler



Model	FK-2060
Section dimensions	32cm*42cm
Bale length	30-100cm(adjustable)
Overall dimension(L*W*H)	410*215*130cm
Weight	1196kgs
Width of the pick-up	144cm
NO. Of spring-tooth	32
Line of spring-tooth	4
Plunger stroke	60cm

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Plunder speed	92/min.
Work speed	4-8kilometer/hour
Work efficiency	80-240 bundle/hour
Tyres	ST205/75 D15 8PR
Matched power	25-50hp tractor
One 20" container can load	4 sets
FOB PRICE	US\$10500/SET



Series of 7C trailers from 1 to 10 tons manufactured by meet the national standard. It is mainly used for transportation of farming materials and crops in the field. It consists of two series, automatic unloading and non-automatic unloading and automatic unloading consists of side unloading and back unloading. The quality is reliable and loading capacity is big. It is easy to be operated and maintained.

The Technique Standards of 7C-1.5 Ton Agricultural trailer

Item	1.5 ton trailer	2 ton trailer
Weight of loading (ton)	1.5	2
Size of carrier box (cm)	2000X1000X450	2400X1200X450
Height of draft point fully loading (mm)	≥350	≥450

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Standards and numbers of tyre	6.00-16 (Two wheel)	7.00-16 (Two wheel)
Way and angle of tipping unloading	Rear unloading 46°	Rear unloading 46°
Braking way	Air braking	Air braking
Overall dimension (cm)	3000X1300X1700	3500X1500X1880
F.O.B QINGDAO PRICE (US\$)	738/SET	800/SET



The Technique Standards of 7C-5 Ton hydraulic self -unloading Agricultural trailer

Model	7C-5	7C-6
Weight of loading (metric ton)	5	6
Size of carrier box (cm)	3950X2190X550	4500X2150X550
Height of draft point fully loading (mm)	≥850	≥850
Standards and numbers of tyre	8.25-16 (Four wheel)	9.00-16 (Four wheel)

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Way and angle of tipping unloading	Side unloading 46°	Side unloading 46°
Brake	Air braking	Air braking
Overall dimension (cm)	5550X2250X2170	6200X2200X2300
F.O.B QINGDAO PRICE (US\$)	2920/ SET.	3070/SET



This series rotary tiller is adopted middle gear transmission system, mounted with the tractor of 12-80HP. Tractor wheel tracks are completely covered after tillage as the working width is much wider. The quality is reliable and the performance is well. So it can be used on dry and paddy field. It can reduce the time, laboring, and cost, etc. during operation

Model	1GN-120	1GN-125	1GN-140	1GN-150	1GN-160	1GN-180	1GN-200
-------	---------	---------	---------	---------	---------	---------	---------

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Working width (cm)	120	125	140	150	160	180	200
working depth(mm)	100~160	100~160	120~180	120~180	120~180	120~180	120~180
Blade (pc)	26	30	30	34	38	42	46
Total weight(kg)	200	210	220	230	240	405	450
Fitted power(hp)	15~18	18~20	20~25	25~30	35~50	50~85	70~100
FOB QINGDAO PRICE(US\$)	440	460	490	550	579	690	725

Notice: One blade for rotary tiller is: US\$0.5/PC



1BQX Light-duty Mounted Harrow: The machine is suitable for pulverizing and loosening clods after plowing and for planning the land before sowing on cultivated land, it can make soil and fertilizer mix up, and clean away the stump of plants. With the reasonable structure, the machine is durable in service, easy to be operated and maintained, etc.

Model	1BQX-1.1	1BQX-1.3	1BQX-1.5	1BQX-1.7	1BQX-1.9	1BQX-2.3	1BQ-3.3
Dimension (cm)	159×123×83	159×144×83	190×155×112	199×182×112	227×190×112	250×233×127	536×340×104
Working width(m)	1.1	1.3	1.5	1.7	1.9	2.3	3.4

CONTACT: HENRY PHONE:86-13806461474 E-MAIL: SHANWEITUO@GMAIL.COM SKYPE:SHANWEITUO

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Qty of Disc	12	14	16	18	20	24	40
Disc diameter(mm)	460	460	460	460	460	460	460
Working depth(mm)	120	120	120	120	120	120	100
weight(kg)	200	220	240	260	260	360	1108
Fitted power(HP)	12-20	15-25	25-35	30-45	45-55	55-80	80-100
PACKING SIZE (cm)	150×55×60	150×55×60	166×67×60	185×67×70	220×80×52	215×110×80	215×123×83
FOB QINGDAO PRICE (US\$)	390.00	420.00	470.00	560.00	590.00	695.00	2100.00



1BJX medium-mounted harrow is suitable for the operations such as soil crushing after plowing, presowing plowing, chessom, clay fertilizer blending, stubbing in the light soil, etc. The harrow has the advantages of reasonable structure, firmness and durability, convenient use, easy maintenance, great capacity of soil piercing and crushing, leveled field surface after plowing, etc.

CONTACT: HENRY PHONE:86-13806461474 E-MAIL: SHANWEITUO@GMAIL.COM SKYPE:SHANWEITUO

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Model	unit	1BJX-1.8	1BJX-2.0	1BJX-2.2	1BJX-2.4	1BJX-2.5	1BJX-2.8
Working width	M	1.8	2	2.2	2.4	2.5	2.8
Working depth	mm	140	140	140	140	140	140
Q'ty of disc	Pcs	16	18	20	22	24	26
Disc diameter	mm	560(610)	560(610)	560(610)	560(610)	560(610)	560(610)
Total weight	kg	390	434	463	604	760	970
Matched power	hp	45	50	55-65	65-75	75-80	80-90
Linkage	Standard three-point mounted						
packing dimension	cm	205*80*60	216*81*60	225*75*55	245*100*55	265*130*55	285*130*55
FOB QINGDAO PRICE	US\$	602/SET	620/SET	665/SET	795/SET	1010/SET	1250/SET



DISC PLOUGH: This product is linked to tractor suspension, and the disc cutters running to plough field when working. With the ability of cutting caudex , getting over of blocks, no-twine, no-block, high working efficiency, good working quality, easy adjustment, and reliable quality, it is suitable for complex farm work in particular such as areas where weed grows thickly and blocks mixed in soil. There are different models to match all kinds of driven power.

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Item	1LYQ-315	1LYQ-320	1LY-325	1LY-425	1LY-525
Working width (cm)	45	60	75	100	125
Working depth(cm)	18	20	25	25	25
No. of disc (pc)	3	3	3	4	5
Diameter .of disc (mm)	450	510	660	660	660
	17.7"	20"	26"	26"	26"
No. of scraper (pc)	3	3	3	4	5
Weight (Kg)	160-170	180-190	456-480	500-520	530-555
Matched power (HP)	18-25	25-45	50-65	65-80	100
FOB QINGDAO PRICE (US\$)	465	476	760	895	1050



Post Hole Digger

Model	WX-30	WX-40	WX-50	WX-60	WX-70	WX-80	WX-100
Operation Efficiency	30-60 second /set						
Operation Diameter (cm)	30	40	50	60	70	80	100

CONTACT: HENRY PHONE:86-13806461474 E-MAIL: SHANWEITUO@GMAIL.COM SKYPE:SHANWEITUO

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Operation Depth (cm)	60						100
Match With tractor(HP)	18+	20+	24+	28+	30+	35+	50+
Power Transmission	gimbal shaft						
FOB QINGDAO PRICE (US\$)	620/SET	630/SET	650/SET	678/SET	696/SET	735/SET	895/SET

2BYF-3/4





Detailed Product Description

This machine is suitable for sowing corn in the zero tillage fields, which can sow the fertilizer as base manure together with seed at one operation. This spurs the seedling fast and sturdy growing. On the front beam of the machine's frame, there equipped with a passive entangling-proof fitting (can also used for furrowing). This fitting can cut down the working resistance and improve working efficiency.

Model:	2BYF-3	2BYF-4	2BYF-5	2BYF-6
Driven power (horsepower):	12-20	15~30	34-40	50~60
Rows spacing(mm):	600	600	600	600
Rows:	3	4	5	6
Fertilization depth(mm):	60-80	60-80	60-80	60-80
Seeding depth(mm):	30-50	30-50	30-50	30-50
Working efficiency(sqm/hour):	3-5*667sqm	4-6*667sqm	5-7*667sqm	6-10*667sqm
Fertilization rate(kg/667sqm):	45	60	75	90
Corn seeds rate(kg/667sqm):	1.50-5.0	1.5-5.0	1.50-5.0	1.5-5.0
FOB QINGDAO (US\$)	440	550	650	720

5TY-2.5/4.5 THE CORN THRESHING SET

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china



The corn threshing set, a machine exclusively for corn threshing, has the advantages of small size, flexible operational field transfer, convenient use and adjustment, high operational efficiency, high threshing performance and low breakage rate.

Modle	unit	5TY-2.5	5TY-4.5
Efficiency	kg	2000~2500	4000~4500
Threshing rate	%	≥98	≥98
Breakage rate	%	≤2	≤2
Total weight	kg	230	350
Matched power	hp	8	12
FOB QINDAO PRICE	US\$	750/SET	1029/SET

2BXF WHEAT AND CORN SEEDER

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china



The wheat (corn) combined seed and fertilizer drill of the series, a planting machine matching with the tractor with 12-18 horse power, is suitable for the fertilizing and seeding in the wheat and corn fields in the plain and hilly areas. The machine has the advantages of good versatility, wide application range, even broadcasting, etc.

Modle	kg	2BXY-3/9	2BXY-4/12
Weight	kg	145	190
Row spacing	mm	150~240	
Seeding lines (row)	Corn/wheat	3/9	4/12
Ditching depth	mm	60-80	60-80
Sowing depth	mm	30-50	30-50
Work efficiency	ha/h	0.2-0.3	0.3-0.4
Seeding quantity per Mu	kg	1.5-40	1.5-50
Fertilizing quantity per Mu	kg	0~75	0~90
Matched power	kw	8.8-13.2	11-13.2
FOB QINGDAO PRICE	US\$	450/SET	530/SET



92LZ-4.8 指盘搂草机系列

FINGER-BOARD HAY RAKE:

Model	92LZ-3.0	92LZ-4.0	92LZ-4.8
Working Width	3.0m	4.0m	4.8m
Fit tractor Power(KW)	Above 15	Above20	Above 40
Productivity	1ha/h	1.5-3.5 ha/h	3-5ha/h
Number of Finger Wheel	4	6	8
Diameter of Finger Wheel	1.46m	1.46m	1.46m
Width of Straw Strip	0.9-1.2m	1-1.5m	1-1.5m
Rake Leaking Rate	≤1%	≤1%	≤1%

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Transport Status(mm)	1800×1800×1400	1800×1800×1400	1800×1800×1400
FOB QINGDAO PRICE(US\$)	1050	1270	1430



This grass cutter/lawn mower adopted European technical, it suitable for grass cutting in big grass land, the grass cutter/lawnmower is driven by tractor in 50 or 40 HP, can work in rough environment.

ROTATING MOWER:


Model	92GZX-1.7
Working Width	1.7m
Stubble Cutting Height	<8cm
Accessory Power	wheeled tractor above 28hp
Productivity	0.6-1ha/h

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Knife Plate	4
Number of Cutting Knife	8
Output Rotational Speed	540rpm
Working Rotational Speed	2640epm
Transport Status	2000×850×541mm
Weight	300kg
FOB QINGDAO PRICE(US\$)	2350

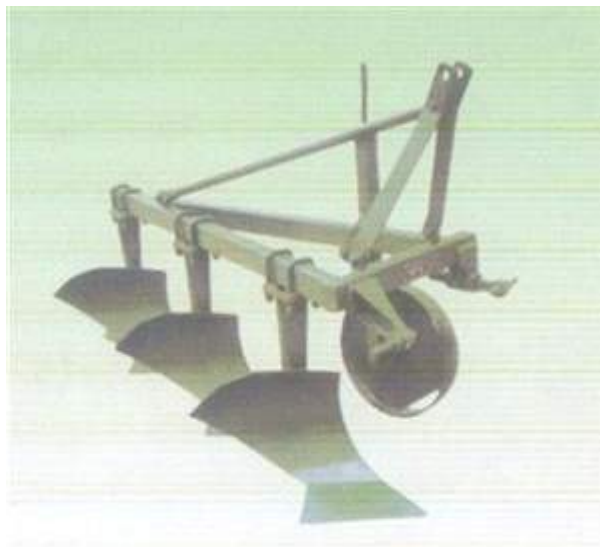

Furrow plough: this machine is suitable for loam, or sandy loam soils in the cultivated area. It is compact in construction, and versatile in application. After plowing, the land surface is smooth and the furrow is narrow with a good pulverization and mulching.

Model	1L-220	1L-320	1L-420	1L-520	1L-525	1L-435	1L-535
Nos. of the body	2	3	4	5	5	4	5
Width of each body(cm)	20	20	20	20	25	35	35
Working width(cm)	40	60	80	100	125	140	175
Working depth(mm)	200~250	200~250	200~250	200~250	200~250	200~250	200-250

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Net Weight (Kg)	64	100	135	166	245	533	600
Fitted power(Hp)	12- 18	25~30	30~40	50~70	70~80	80~90	85~120
Linkage	(Standard three-point mounted)						
FOB QINGDAO PRICE (US\$)	95/SET	190/SET	240/SET	380/SET	480/SET	935/SET	1150/SET

The reversible plow



It has a compact structure and suitable for working on all various land. with the well working performance of the machine, after cultivation, the land surface is levelling, the soil clods well crushed and turned over and the furrows is small.

Model	unit	1LF-230	1LF-320	1LF-330	1LF-430	1LF-530
Description		Turn by handle		Turn by hydraulic		
Number of bottoms	pcs	4	6	5	8	10
Working width	m	0.6	0.6	0.9	1.2	1.5
Working depth	mm	250	200	160~250		
Total weight	kg	230	250	580	750	950
Matched power	Hp	25~30	30~40	55~65	65~90	100~120
Packing dimension	cm	220*125*730	220*125*73	270*115*97	340*115*97	400*115*100

CONTACT: HENRY PHONE:86-13806461474 E-MAIL: SHANWEITUO@GMAIL.COM SKYPE:SHANWEITUO

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

		(5sets)	0(3sets)	(2 sets)	(2 sets)	(2 sets)
Linkage		(Standard three-point mounted)				
FOB Qingdao price	US\$	420/set	445/set	1230/set	1430/set	1680/set
40ft container load	sets	135	135	30	20	20

Notice: The H.S code number is: 84321000



SUBSOILER

TS subsoiler is mainly suitable for field deep tillage operations in the potato, beans and peas and cotton fields. The machine can break hardened living soil, free soil, retain underground water content and clean stubble. The machine has the advantages of adjustable depth, wide application range, convenient hitching, etc.

Modle	Unit	TS-1.0	TS-1.4	TS-1.8	TS-2.1	TS-2.6
working width	mm	1000	1400	1800	2100	2600
no. of legs		5	7	9	11	13
working depth	mm	100-240				

CONTACT: HENRY PHONE:86-13806461474 E-MAIL: SHANWEITUO@GMAIL.COM SKYPE:SHANWEITUO

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

total weight	kg	240	280	320	370	450
matched power	hp	25	40	50~60	70~80	80~100
FOB Qingdao price	US\$	440/set	500/set	580/set	630/set	770/set

CULTIVATOR



3Z cultivator, which is suitable for field intertillage operations in corn, soybean, cotton and potato fields, can complete various field operations at one time including intertillage, subsoiling, ditching, ridging, etc. The machine has the advantages of convenient row pitch adjustment, flexible depth control, easy ridging width adjustment, large range of application, etc.

model	Unit	3Z-2	3Z-3	3Z-4
working width	cm	150	290	370
cultivation	rows	3	4	5
ridging	rows	2	3	4
ridge spacing	cm	45-60		
matched power	hp	20-30	40-50	70-80
FOB QINGDAO PRICE	US\$	220/set	240/set	380/set

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china



TSZ cultivator can carry out various field operations including bedding up, soil draught, weeding, etc. The machine which adopts S-shaped teeth has the advantages of good elasticity, high strength, better adaptability, etc.

Model	unit	TSZ-1.5	TSZ-1.8	TSZ-2.1
Working Width	mm	1500	1800	2100
Weight	Kg	120	140	170
No.of Heat-Treated Tines	pcs	9	11	13
linkage		Three-point suspension		
FOB Qingdao Price	US\$	420/set	430/set	440/set



潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

As a novel cultivator developed by our company according to the demand of the international market, TS3ZT dual-spring cultivator adopts a dual-spring straining device. During the working process of the cultivator, the gunnel can automatically kick up when coming across an obstructer and can restore to the original working status after getting over the obstructer. In this way, the gunnel is under protection. The machine has the advantages of convenient row pitch adjustment and easy depth adjustment. The machine is suitable for intertillage ripping operation in corn, cotton, beans and peas fields.

Modle	Unit	TST-1.0	TST-1.4	TST-1.8	TST-2.2
working width	m	1	1	1.8	2.2
no. of tines	pcs	5	7	9	11
working depth	Mm	100~200			
total weight	Kg	260	300	350	420
matched power	Hp	25	30~40	40~50	50~70
FOB Qingdao price	US\$	455/SET	485/SET	540/SET	600/SET



TSY cultivator is suitable for field intertillage, subsoiling, weeding and ridging operations in the corn, cotton, beans and peas, and potato fields. The machine has the advantages of adjustable row pitch, and convenient switchover between subsoiling and ridging.

Model	unit	TSY-1.2	TSY-2.0	TSY-2.8
working width	mm	1200	2000	2800

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

no.of legs		2	3	4
working depth	mm	100-240		
row spacing	mm	500~800		
total weight	kg	150	210	290
matched power	hp	25	40	50~60
FOB Qingdao price	US\$	530/SET	740/SET	960/SET

3Z 起垄机



3Z adjustable ridge machine: is used for making ridge in the field after tillage. The main frame is made of rectangular tube welded together, assembled with the angle adjustable disc ridging unit. The discs are made of qualified 65Mn steel plate with heat treatment. The machine is steady and durable, convenient for transport and easy to adjust, operate and maintenance.

Model	3Z-80	3Z-120	3Z-140	3Z-180	3Z-260
Max. Working width(cm)	80	120	140	180	260
Ridge width(cm)	20-45	20-45	20-45	30-50	30-50

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Ridge high (cm)	15-24	15-24	15-24	15-30	15-30
Matched power(HP)	15-30	25-50	50-65	50-65	70-80
FOB Qingdao Price	US\$308	US\$320	US\$382	US\$415	US\$530

3QL SERIES RIDGE PLOUGH:

model		3QL-3	3QL-4	3QL-5
working width	mm	2500	3200	3900
ridging spacing	mm	700~900	700~900	700~900
ridging height	mm	200~250	200~250	200~250
matched power	hp	40	60	80
FOB Qingdao price	US\$	575/SET	632/SEsT	695/SET



潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

9GL hay rake, matching with a small four-wheel tractor, is mainly used for the hay collecting operations after mowing. The implement adopts a hydraulic overturning mechanism and spring steel rake fingers. During the working process, the rake fingers can be overturned by the hydraulic overturning mechanism so as to realize the offloading of the hay.

Model	unit	9GL-1.4	9GL-1.6	9GL-1.8	9GL-2.1
Raking width	m	1.4	1.6	1.8	2.1
Weight	kg	90	100	110	120
Fitted power	hp	11	15	18	20
Linkage		(Three Points Semi mounted)			
FOB QINGDAO	US\$	235/set	250/set	265/set	280/set



9GB-1.4/1.6/1.8/1.9/2.1 Rear-fixed mounted reciprocating-type Mower matched with four-wheel tractor range from 12~22 HP. The machine uses biased crank connected bar structure to drive

潍 坊 华 海 贸 易 有 限 公 司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

blades to work. It is suitable to be used to reap natural forage grass and plant herbage, alfalfa, reed, grass feed etc. in level grass land for agricultural, forest and pasturing area, and in different condition grass land in the sloping field and hills area. It uses the tractor's power output shaft to promote the mower's movement of blade, used the three-points suspension structure to make the machine rise and fall, operate the power output structure (Operate the Clutch of tractor) to realize the moving and stopping of blades, lifting mechanism is divided into two models of cylinder and lifting frame.

The machine is divided into Left-side power output and Rear power output according to matched power output model, and matched with Left-side power output and rear-side power output of tractor separately. The machine is operated by the single person, which is the driver of tractor, the machine is of good power-driven performance, as the machine meets obstacle, and blade can be lifted by operating the hydraulic equipment of tractor. The machine has the features like simple structure, operate easily, strength in cutting, lower and trim cutting stubble, reliable operation and so on.

Modle	unit	9GB-1.4	9GB-1.6	9GB-1.8	9GB-2.1
Working width	m	1.4	1.6	1.8	2.1
Stubble height	cm	5~6	5~6	5~6	5~6
Total Weight	kg	180	190	200	220
Matched power	hp	15	18	20	25
Lingkage		(Standard three-point mounted)			
FOB QINGDAO	US\$	440	455	470	485



Lawnmower (hay rake): this machine is of strong adaptability to the local landform, as well as high efficiency and flexibility of operation. It has been well-received by the customers in pastoral areas since it is put on the market. The machine is sold not only in pastoral areas in Xinjiang, Inner Mongolia and Jilin domestic market, but also sell very well in foreign countries such as Russia, Tajikistan, Kazakhstan, Mongolia, and so on.

Major technical parameters of 9GL-1.6, 1.8, 2.1 trailer mower (hay rake)

Model	9GBL-1.4	9GBL-1.6	9GBL-1.8	9GBL-2.1
Cutting width(m)	1.4	1.6	1.8	2.1
Raking width(m)	1.4	1.6	1.8	2.1
Working speed(Km/h)	6--7			
Average height of cutting(cm)	6--7			
Power output rotary speed(r/min)	1250			
Production rate(mu/h)	16-19			
Matched (HP)	18-35			

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

FOB QINGDAO PRICE(US\$)	US\$800	US\$854	US\$885	US\$914
-------------------------	---------	---------	---------	---------



CRD-600 spreader constructed by U.S.A technology and especially for forage seeding、broadcasting fertilizer before cultivating. This kind of machine has the advantages of simple, easy to operate and maintain. We export it to U.S.A and sell to west of china.

MODEL		CRD-400 SPREADER
Overall dimension	Length (cm)	115
	Width (cm)	110
	Height (cm)	145
Case volume (lbs)		400
Weight (Kg)		80
Working width(m)		16
Matched power(HP)		20-30

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

Packing type	Salver
Packing dimension(cm)	110*115*120
FOB Qingdao price (US\$)	250/SET

Three point tractor sprayer



MODEL	WL-200-6	WL-300-6	WL-400-8	WL-650-12	WL-800-14	WL-1000-12
MATCHED POWER	12-15	15-20	18-40	55-80	55-80	70-100
TRANK CAPACAITY(L)	200	300	400	650	800	1000
WORKING WIDTH(M)	6	6	8	12	14	12
WATERING ARM/ SECTION	2	5	5	5	5	5
NO. OF SPRAY HEAD	12	12	16	24	28	24
PUMP RUNOFF(L/min)	40	40	80	120	120	120
FOLD LIFT/DOWN	HANDWOR K	HANDWOR K	HANDWOR K	HANDWOR K	HANDWOR K	HANDWOR K
BALANCE AND SHOCK ABSORPTION	NO	NO	NO	YES	YES	YES

潍坊华海贸易有限公司

WEIFANG HUAHAI TRADE CO. LTD

Rm 507 No. 2112 Xinhua Road Weifang city shandong province china

SYSTEM						
OVERALL DIMENSION (M)	0.8*1.6*2.98	1.2*2.1*1.2	1.2*2.05*1.3	2.4*3*1.7	2.4*3.6*1.7	2.4*3*1.6
NET WEIGHT (KG)	80	137	90	330	380	350
FOB QINGDAO PRICE (US\$)	990/SET	1150/SET	1450/SET	2470/SET	2670/SET	2880/SET



Functions and Features

1. Applying to help cattle and sheep individual farmers to cut all kinds of wet and dry crops, straw and grasses.
2. Equipped with single-phase motors whose power is 2.2kw/2840rpm.
3. The customers can choose to equip with one piece, two pieces or three pieces blade.
4. The grasses-cut length can be adjusted. Because the machine is equipped with different number of blades, the grasses-cut length is 15-30mm、10-20mm、5-10mm respectively

Type	9ZP-0.6
Dimension	900×600×900mm
Cut size	10-30mm
Throwing height	2-4m
Capacity	400-800kgs/hour
Power	220V,50HZ,2.2kw motor
Weight	80kg
PRICE	US\$400/SET WITH MOTOR