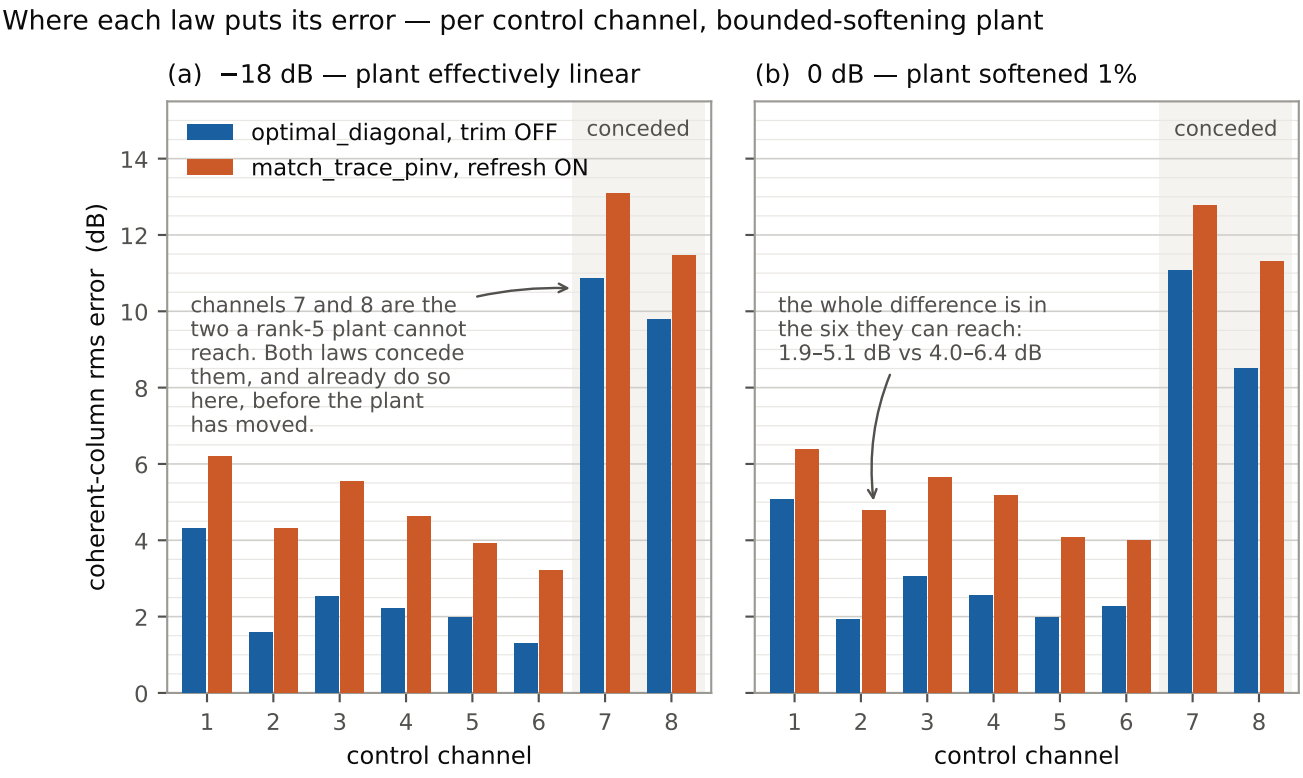
Where each law puts its error — per control channel, bounded-softening plant
(a) −18 dB — plant effectively linear
(b) 0 dB — plant softened 1%
optimal_diagonal, trim OFF
match_trace_pinv, refresh ON
conceded
coherent-column rms error (dB)
channels 7 and 8 are the two a rank-5 plant cannot reach. Both laws concede them, and already do so here, before the plant has moved.
the whole difference is in the six they can reach: 1.9–5.1 dB vs 4.0–6.4 dB
control channel
0
2
4
6
8
10
12
14
1
2
3
4
5
6
7
8