


Use TTGO T4 or T-DISPALY NOT both

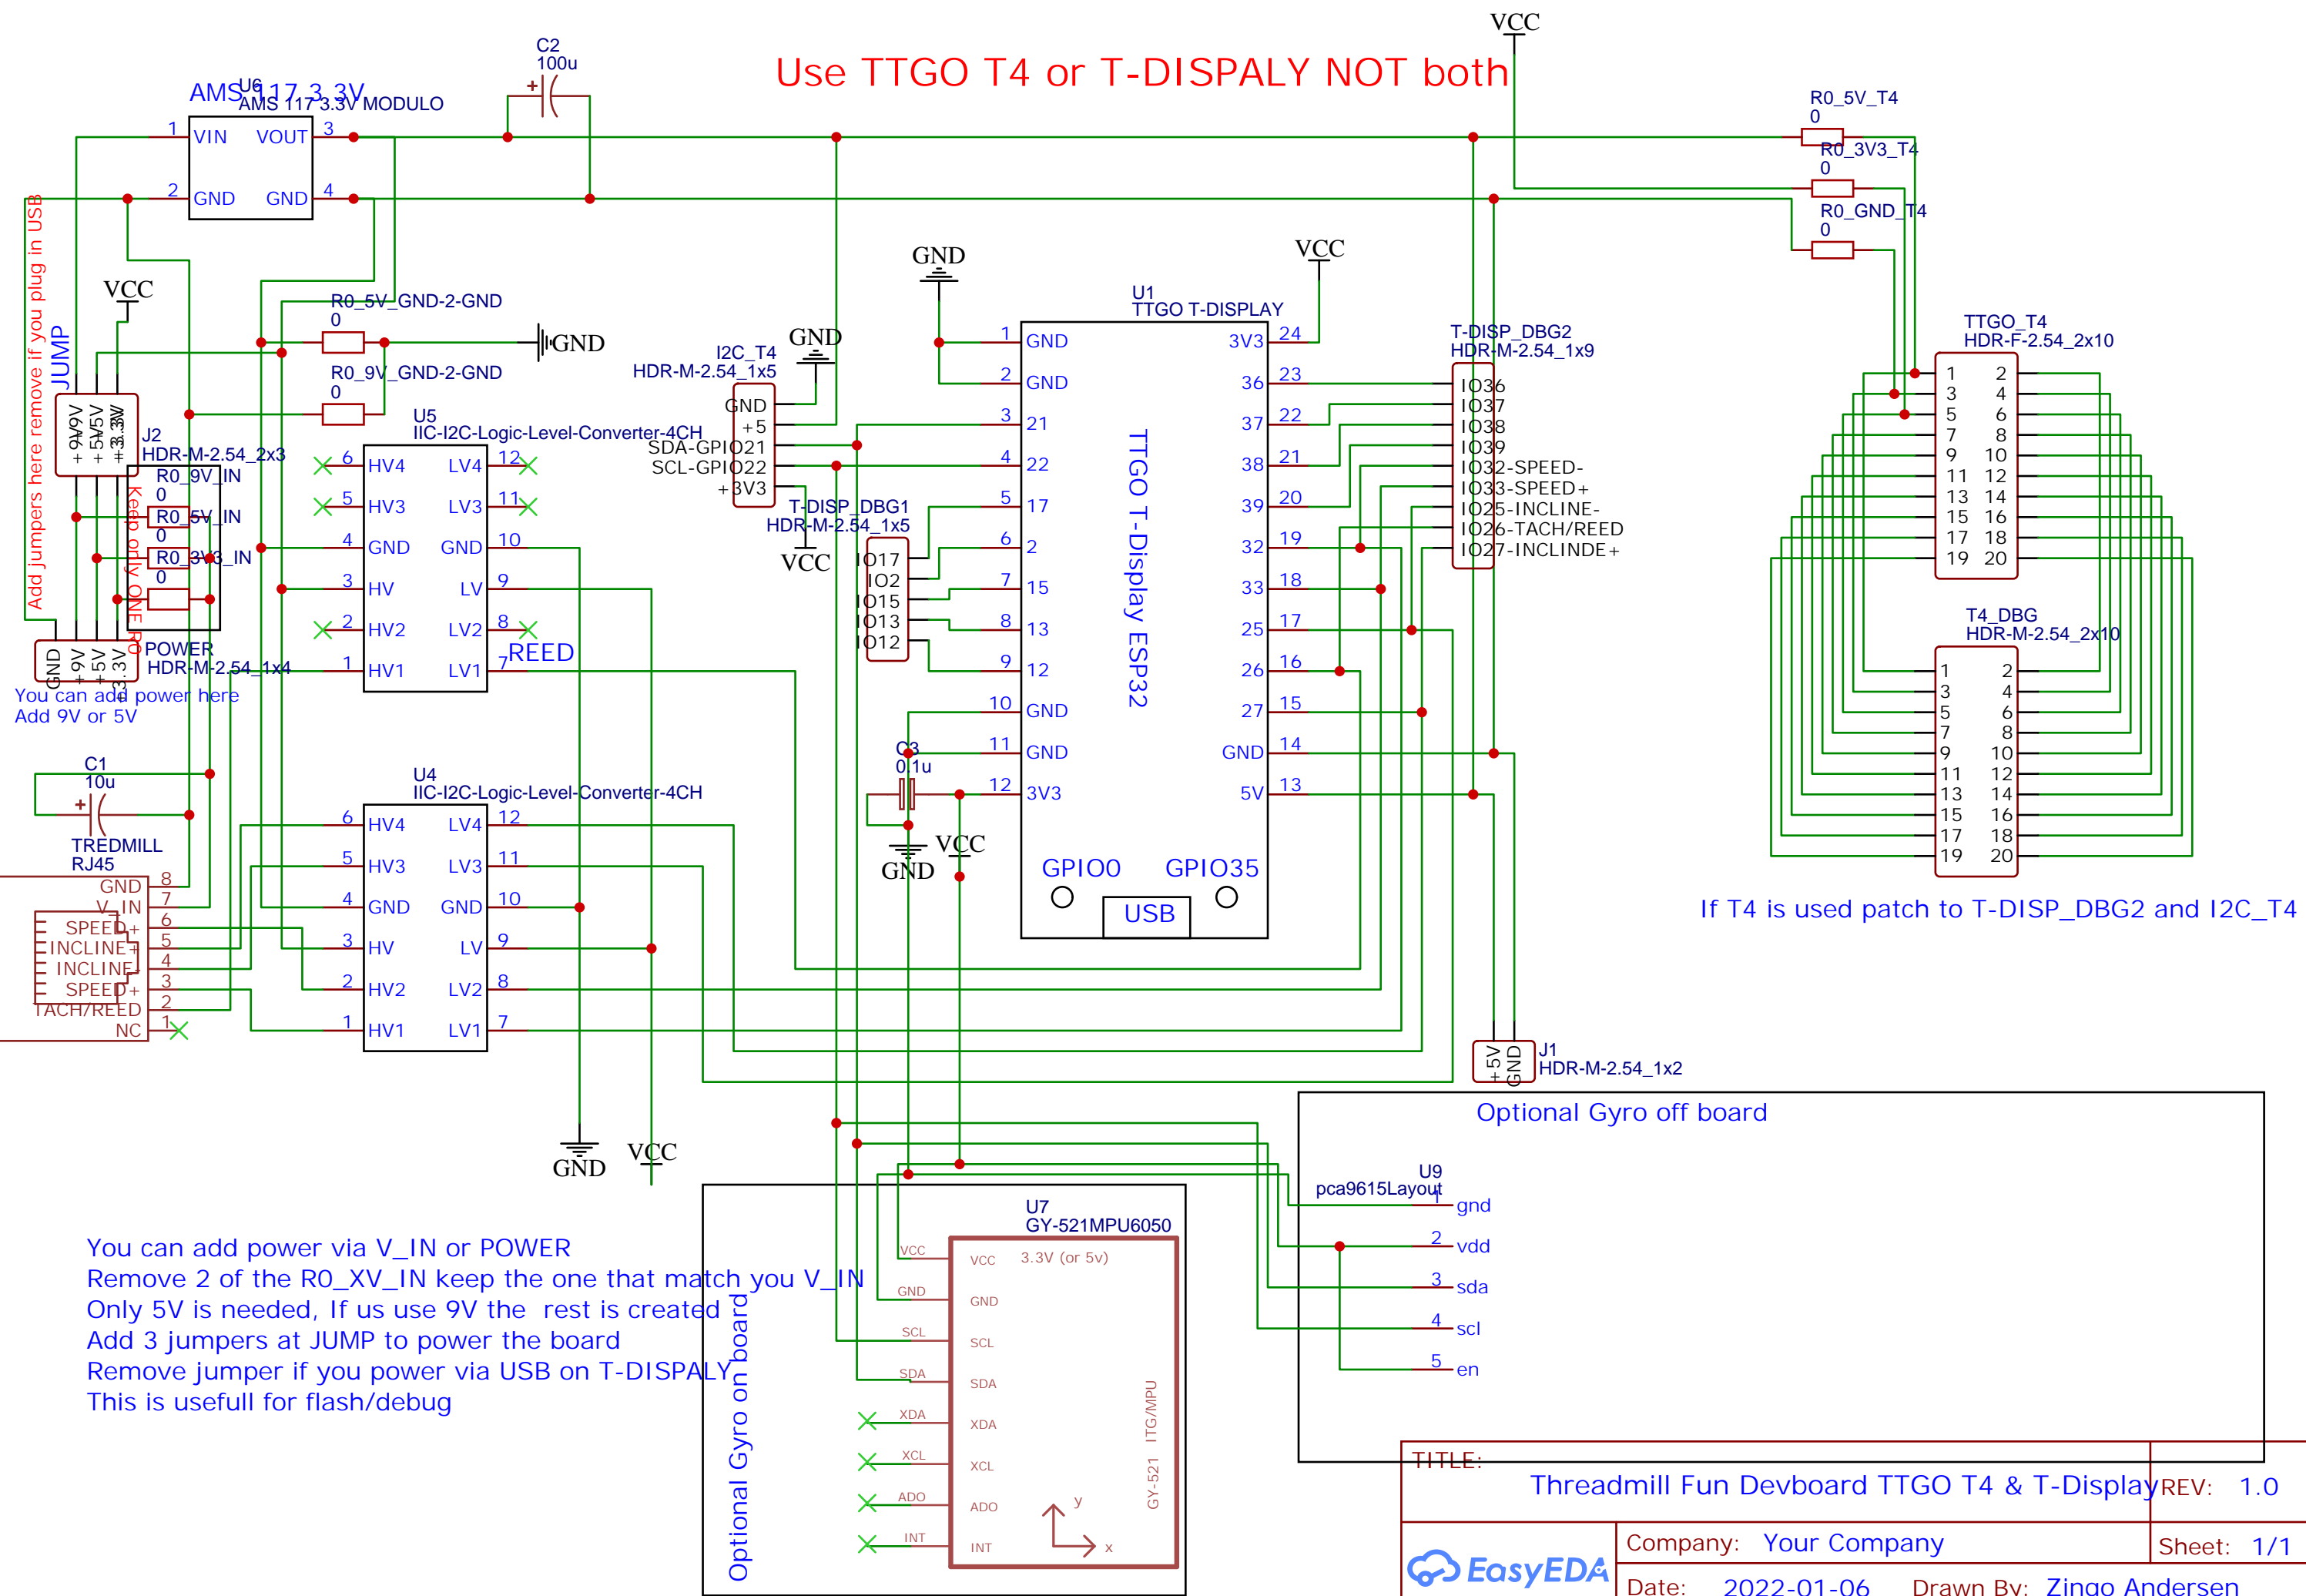

Add jumpers here remove if you plug in USB

You can add power here Add 9V or 5V

You can add power via V_IN or POWER
Remove 2 of the R0_XV_IN keep the one that match you V_IN
Only 5V is needed, If us use 9V the rest is created
Add 3 jumpers at JUMP to power the board
Remove jumper if you power via USB on T-DISPALY
This is usefull for flash/debug

Optional Gyro on board

Optional Gyro off board

If T4 is used patch to T-DISP_DBG2 and I2C_T4