


YF-B6 & B10 PRODUCT DETAILS

Water flow sensor consists of a copper body, a water rotor, and a hall-effect sensor. When water flows through the rotor, rotor rolls. Its speed changes with different rate of flow. The hall-effect sensor outputs the corresponding pulse signal. This one is suitable to detect flow in water dispenser or coffee machine. Life is longer than plastic body.

Features

- Compact, Easy to Install
- High Sealing Performance
- High Quality Hall Effect Sensor
- RoHS Compliant

DN20 inlet thread on the outside,
outlet thread on the outside

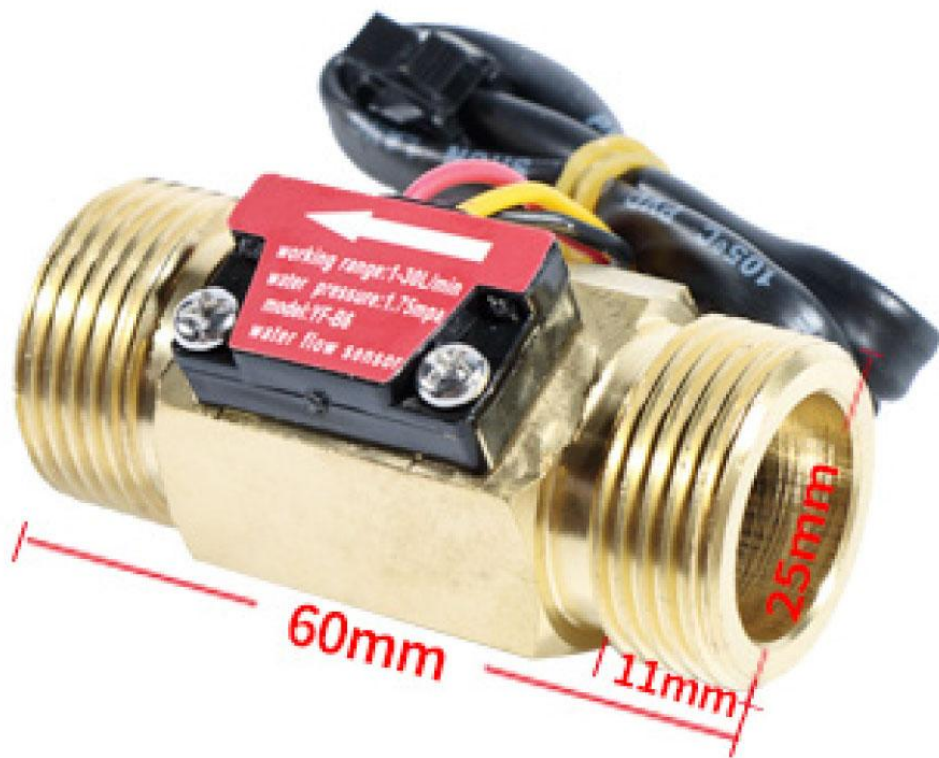

Type	Dimensions	Working Voltage	Flow Rate Range	Length	Male & Female	Length of Thread	Material
YF-B6	DN20 (3/4")	5V~15V(DC)	1~30L/min	60mm	Double Male	11mm	Copper
YF-B10	DN25 (1")	5V~15V(DC)	1~30L/min	60mm	Double Male	11mm	Copper

Technical details

Weight	G.W 152g
Mini. Wokring Voltage	DC 4.5V
Max. Working Current	15mA (DC 5V)
Working Voltage	DC 5V~15V
Flow Rate Range	1~30L/min
Frequency	F=(6.6*Q)Q=L/MIN±3%
Load Capacity	≤10mA (DC 5V)
Operating Temperature	0 ~ 80℃
Liquid Temperature	≤120℃
Operating Humidity	35%~90%RH
Water Pressure	≤1.75MPa
Storage Temperature	-25~+ 80℃
Storage Humidity	25%~95%RH
Error Range	(1~25L\MIN) ±3%
Material Description	H57Copper+POM
Output Pulse High Level	>DC 4.7V (Input Voltage DC5V)
Output Pulse Low Level	<DC 0.5V (Input Voltage DC5V)
Output Pulse Duty Cycle	50%±10%
Wire Connection	– Terminal 1 (Red): VDD + – Terminal 2 (Black): GND - – Terminal 3 (Yellow): Signal VOut (GND Referenced/Open Drain , i.e. Requires Pull-Up)