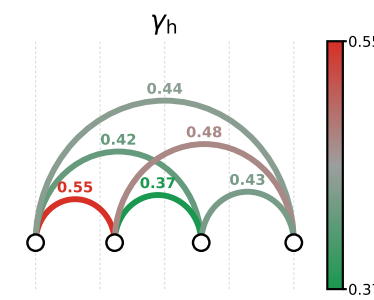
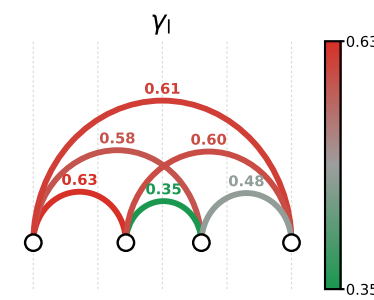
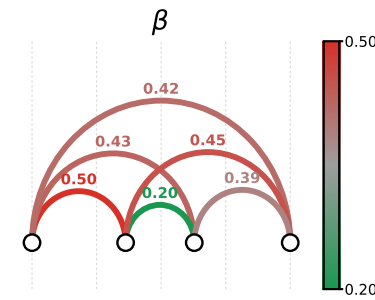
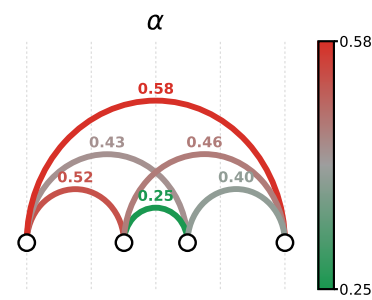
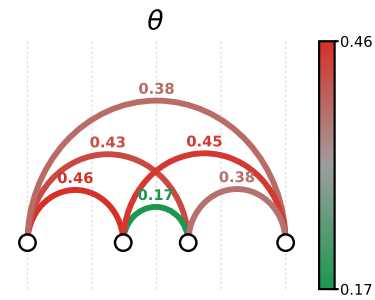
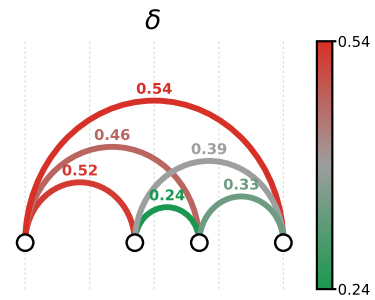
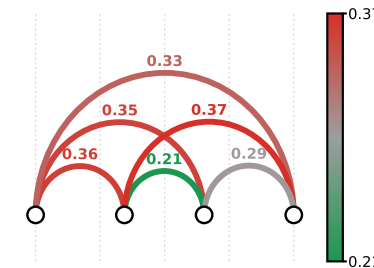
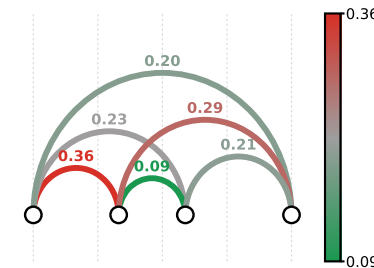
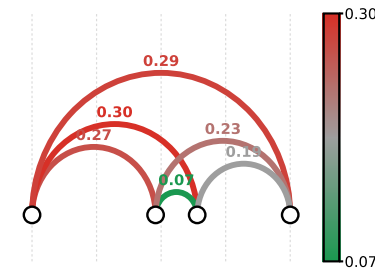
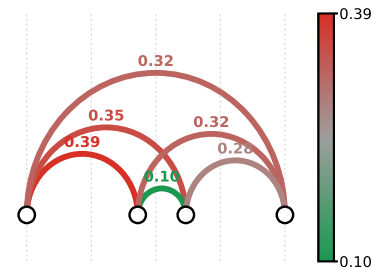
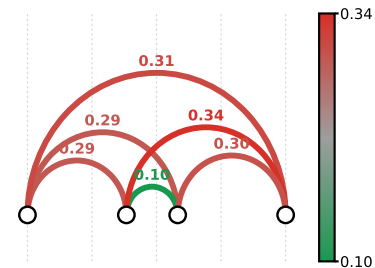
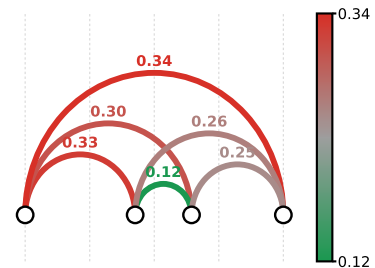
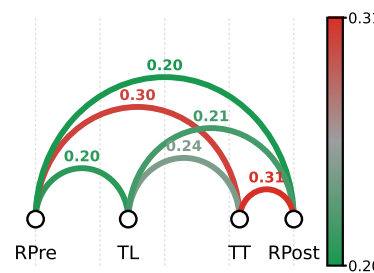
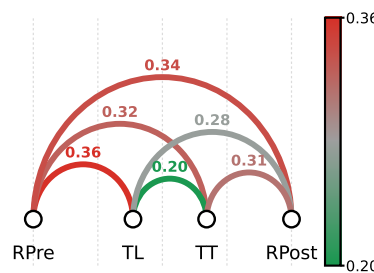
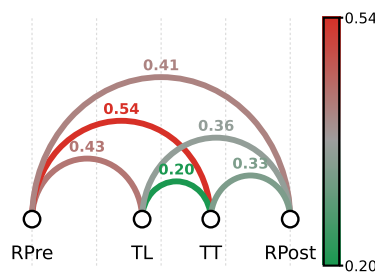
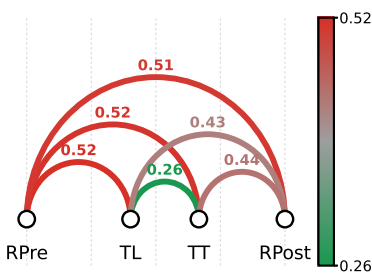
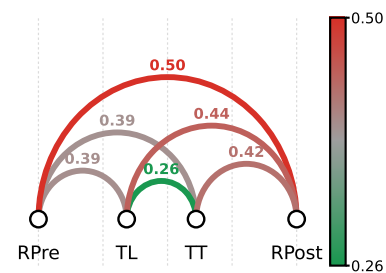
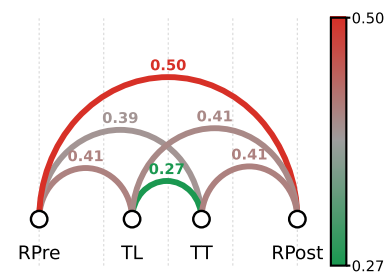


d_S Spearman d_P Pearson d_F Frobenius

— arc COLOUR = within-panel distance (green=close, red=far)

— phase POSITIONS = 1-D spring layout (stiffness = $1/d^2$)

--- reference grid at 0, .25, .5, .75, 1

○ phase node