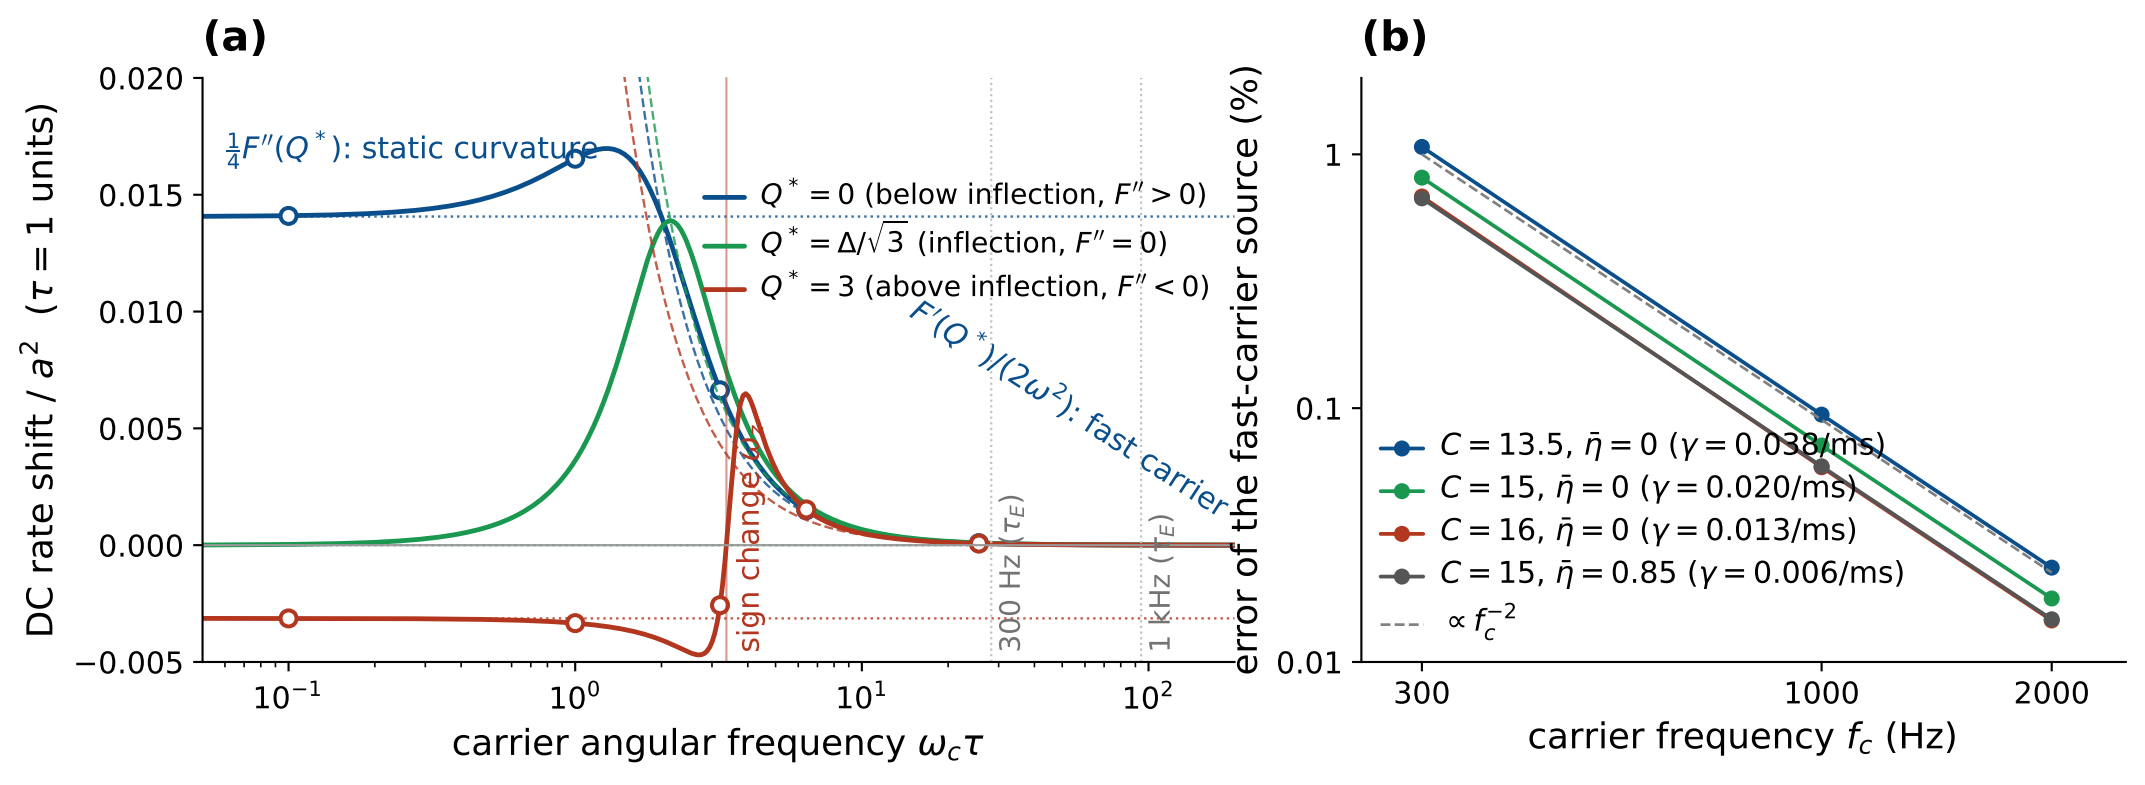
(a)
(b)
DC rate shift / a^2 ($\tau = 1$ units)
carrier angular frequency $\omega_c\tau$
$\frac{1}{4}F''(Q^*)$: static curvature
$Q^* = 0$ (below inflection, $F'' > 0$)
$Q^* = \Delta/\sqrt{3}$ (inflection, $F'' = 0$)
$Q^* = 3$ (above inflection, $F'' < 0$)
$F'(Q^*)/(2\omega^2)$: fast carrier
sign change at ω_c
300 Hz (τ_E)
1 kHz (τ_E)
error of the fast-carrier source (%)
carrier frequency f_c (Hz)
$C = 13.5$, $\bar{\eta} = 0$ ($\gamma = 0.038$/ms)
$C = 15$, $\bar{\eta} = 0$ ($\gamma = 0.020$/ms)
$C = 16$, $\bar{\eta} = 0$ ($\gamma = 0.013$/ms)
$C = 15$, $\bar{\eta} = 0.85$ ($\gamma = 0.006$/ms)
$\propto f_c^{-2}$