

COLORS & CUSTOMIZATION

TAILORED FINISHES FOR RESIDENTIAL AND COMMERCIAL PROJECTS



**CUSTOM COLORS
& SIZES AVAILABLE**



ARCTIC

White Exterior / Warm White Interior /
Graphite Cabinetry



URBAN

Grey Exterior / Blush Interior /
Slate Cabinetry



NOIR

Black Exterior / Woodgrain Interior /
Graphite Cabinetry

ALUMINIUM HONEYCOMB PANEL SYSTEM

Durable, easy-care surfaces
designed for outdoor-kitchen
applications.



EXTERIOR FINISHES



White



Grey



Black

INTERIOR PANELS



Warm White



Blush



Woodgrain

CABINET FINISHES



Graphite



Light Grey



Natural Oak



MODEL LENGTHS: PRO 2300 mm / MAX 2900 mm

Project-specific dimensions are available subject to engineering
review and approved production drawings.



Colors shown are indicative. Final color, texture and dimensions must be confirmed using approved samples and production drawings.

PRO — CONFIGURATION

2300 mm INTEGRATED OUTDOOR KITCHEN

PRO | 2300 mm



MODEL: PRO 2300 mm



For the 2900 mm format, see the MAX model.



Configuration and appliance specifications are subject to the approved order and destination-market requirements.

PRO — INTERNAL DIMENSIONS

2300 mm FRONT & SIDE REFERENCE

PRO | 2300 mm




MODEL: PRO 2300 mm




Dimensions illustrated below apply to the PRO model.

FRONT VIEW

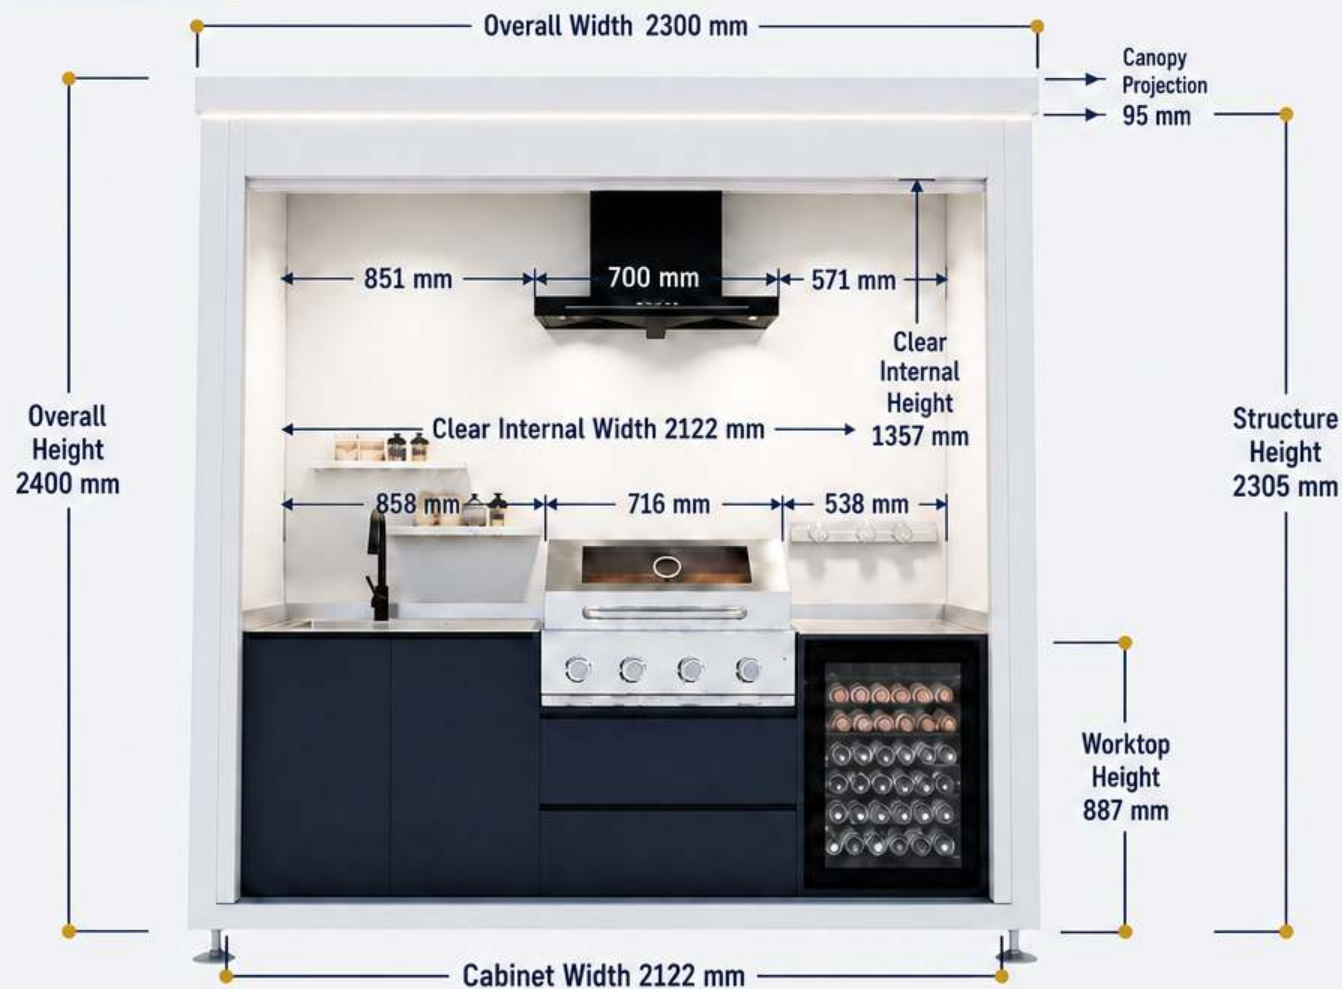

SIDE VIEW

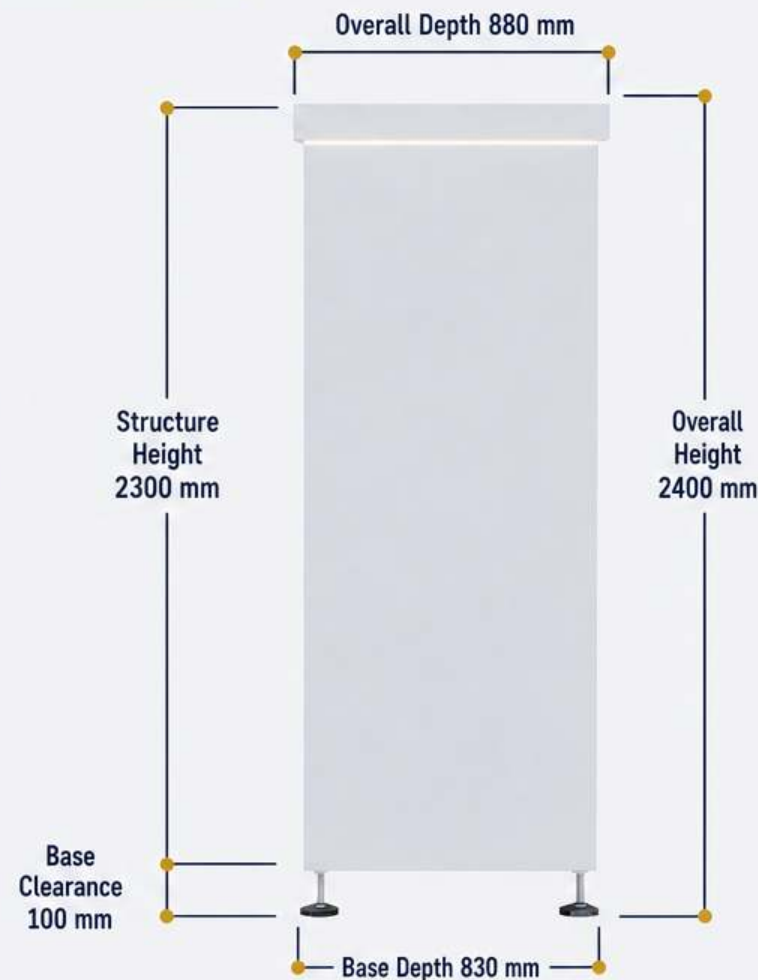

Dimensions are nominal. Final dimensions and internal layout are subject to approved production drawings.

MAX — FLIP-COVER CONFIGURATION

2900 mm INTEGRATED OUTDOOR KITCHEN



MAX | 2900 mm



MODEL: MAX 2900 mm

For the 2300 mm format, see the PRO model.

PERIMETER LED LIGHTING

RECESSED DOWNLIGHTS

OPTIONAL DISPLAY

STORAGE SHELVES

SUS 304 SINK

ALUMINIUM CABINET SYSTEM

ADJUSTABLE SUPPORT FEET

ELECTRIC LIFT CANOPY

RANGE HOOD

ELECTRIC LINEAR ACTUATOR

ALUMINIUM HONEYCOMB INTERIOR

INTEGRATED POWER RAIL

GAS / CHARCOAL GRILL

UNDER-COUNTER REFRIGERATOR



Configuration and appliance specifications are subject to the approved order and destination-market requirements.

MAX – INTERNAL DIMENSIONS

2900 mm FRONT & OPEN-SIDE REFERENCE


MAX | 2900 mm

MODEL: MAX 2900 mm
Dimensions illustrated below apply to the MAX model.

FRONT ELEVATION



SIDE ELEVATION – OPEN

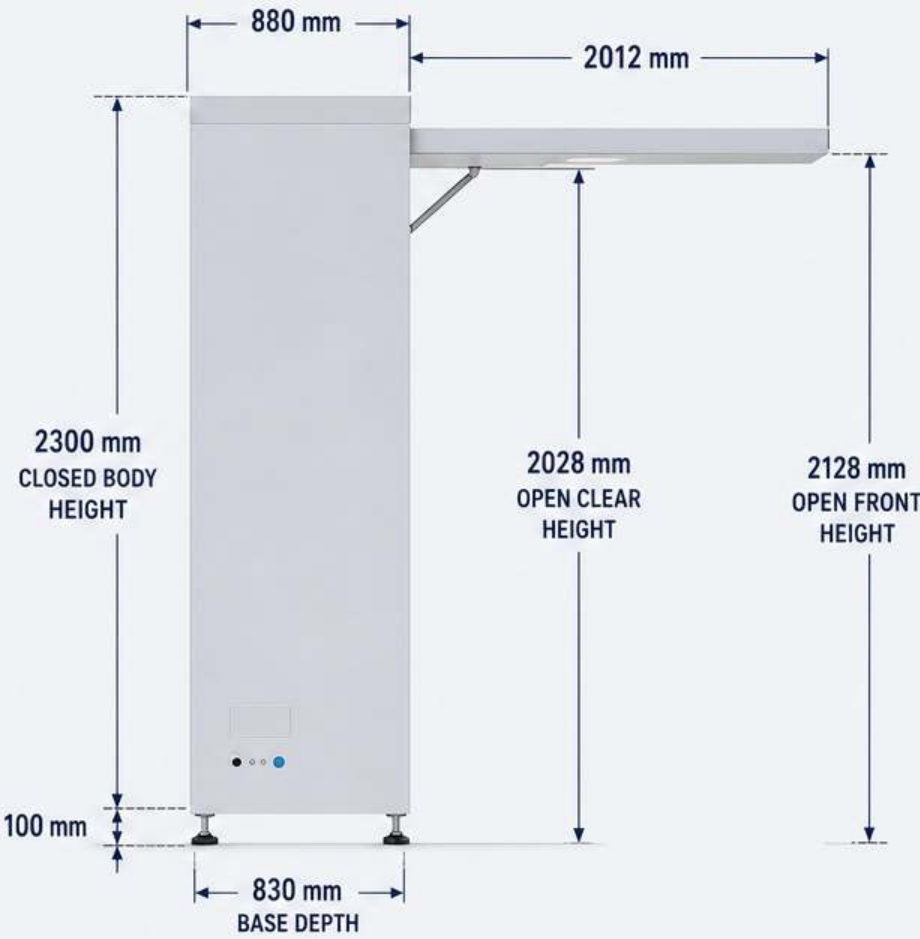

Dimensions are nominal. Final dimensions are subject to approved production drawings.

PACKAGING & CONTAINER LOADING

REFERENCE DATA FOR EXPORT SHIPMENT PLANNING



PRO / MAX / CUSTOM
EXPORT PACKING REFERENCE

MODEL		40HQ EST. LOAD	 PROTECTIVE CARTON SIZE (L × W × H)	 WOODEN CRATE SIZE (L × W × H)
 PRO	FULLY ASSEMBLED	13 units	2320 × 900 × 2480 mm	2470 × 1050 × 2630 mm
	ASSEMBLY-REQUIRED	26 units	To be confirmed per approved packing plan	To be confirmed per approved packing plan
 MAX	FULLY ASSEMBLED	8 units	2980 × 900 × 2480 mm	3130 × 1050 × 2630 mm
	ASSEMBLY-REQUIRED	16 units	To be confirmed per approved packing plan	To be confirmed per approved packing plan
 CUSTOM	 FULL-CONTAINER ORDERS ONLY	40HQ load: To be confirmed	To be confirmed per approved packing plan	To be confirmed per approved packing plan



PRODUCTION POLICY

CUSTOM AND ASSEMBLY-REQUIRED MODELS ARE PRODUCED ONLY
FOR **FULL-CONTAINER-QUANTITY ORDERS.**



Estimated loading quantities are for reference only. Final quantities are subject to confirmed packing dimensions, gross weight, loading orientation and the approved container-loading plan.



All dimensions are packaging dimensions and are shown as L × W × H.