TECHNICAL DATA · SIZE BANDS AND CONSTRUCTION OPTIONS

PRO / MAX / CUSTOM CUT SHEET

Three KAISTEEL series for dealers and project buyers · 14 November 2026

SERIES

PRO

Motorized outdoor kitchens with an overall width of about 2200–2300 mm.

Reference example — 2300 × 880 × 2400 mm, aluminium motorized lift-up

Also specified — ~2250 mm width; depth ~730 mm or ~960 mm

Door — Motorized lift-up or motorized roller shutter

SERIES

MAX

Motorized outdoor kitchens with an overall width of about 2700–2900 mm.

Reference example — 2900 × 960 × 2400 mm, aluminium motorized lift-up

Also specified — 880 mm depth; ~2850 mm width; depth ~730 mm or ~960 mm

Door — Motorized lift-up or motorized roller shutter

SERIES

CUSTOM

All other sizes and typologies, quoted per project and confirmed on the approved order drawing.

Low-profile — About 1150–1200 mm high, including foldable units

Extended — About 3500 mm wide flagship typologies

Other — Terrace / open-frame layouts and project or OEM sizes

CONSTRUCTION AND MATERIAL OPTIONS

Exterior	Aluminium 2.0 mm, or stainless-steel inner and outer shell
Worktop	SUS304 solid, 6 / 8 / 10 mm (no 5 mm); or quartz / sintered stone; or a stainless worktop on the stainless-shell configuration
Interior lining	Aluminium honeycomb 8 mm and/or stainless inner shell, as specified
Cabinets	Aluminium alloy / honeycomb aluminium-panel cabinets
Frame	Aluminium reference: Q235 galvanised square steel, 60 × 60 × 3 mm. Stainless-shell frame confirmed on the approved specification
Door	Motorized lift-up (reference drawings, page 2) or motorized roller shutter

OPTIONS AVAILABLE ON REQUEST

Mobility	Lockable casters
Audio	Embedded Bluetooth speaker
Exterior finishes	Selected finishes, for example mirror, glass-panel, wood-grain or starry ceiling
Supply voltage	110V/60Hz or 220V/50Hz, by market, on the aluminium reference; otherwise confirmed on the approved specification
Ingress protection	Electrical components IP65 on the aluminium reference; otherwise confirmed on the approved specification


HOW TO SPECIFY

State the series (PRO, MAX or CUSTOM), overall width and depth, exterior (aluminium 2.0 mm or stainless-steel inner and outer shell), worktop, door type, supply voltage and any options required. The dimensioned drawings on page 2 are aluminium motorized lift-up reference examples in the PRO and MAX size bands. Final dimensions, materials, door type, services, packing and electrical data are confirmed on the approved order drawing. Construction options are specified per order; do not assume one shell, worktop or door type applies to every unit. Units ship assembled; site work is positioning, levelling, and water and power connection.


REFERENCE DRAWINGS, SERVICES AND PACKING

Same cut-sheet set · PRO / MAX / CUSTOM · 14 November 2026

ALUMINIUM MOTORIZED LIFT-UP REFERENCE — NOT UNIVERSAL FOR EVERY MATERIAL OR SIZE

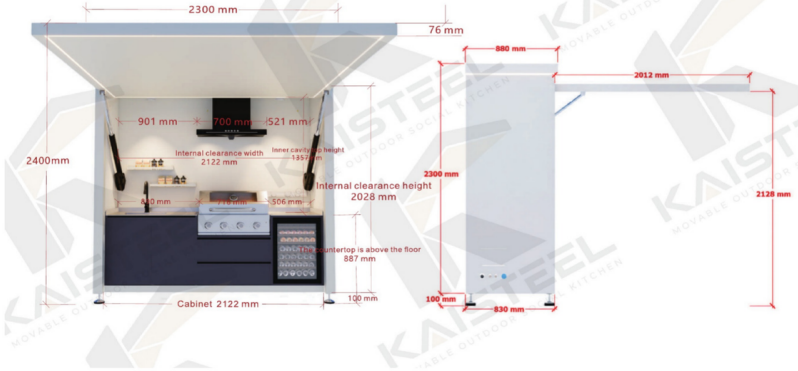

PRO size band, aluminium motorized lift-up reference. Overall body 2300 × 880 × 2400 mm. Open canopy projects 2012 mm, with 2128 mm clear height underneath. Reference example only; final dimensions are confirmed on the approved order drawing. Dimensions in mm.

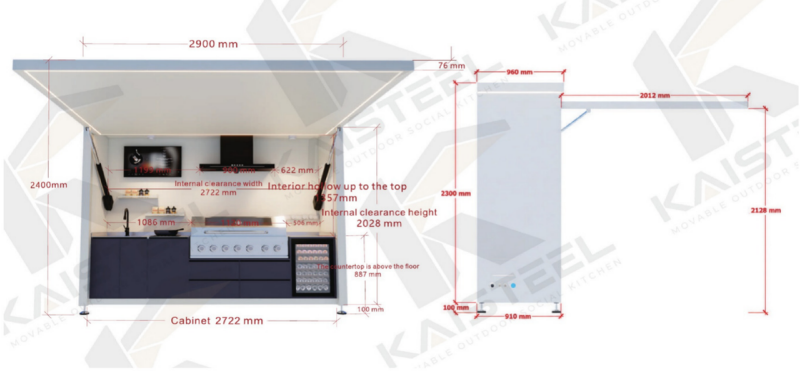

MAX size band, aluminium motorized lift-up reference, 960 mm-deep body. Overall body 2900 × 960 × 2400 mm. Open canopy projects 2012 mm, with 2128 mm clear height underneath. An 880 mm-deep body is also available. Reference example only. Dimensions in mm.

KEY DIMENSIONS — ALUMINIUM LIFT-UP REFERENCE

	PRO reference	MAX reference
Overall body (W × D × H)	**2300 × 880 × 2400 mm**	**2900 × 960 × 2400 mm**
Countertop height above floor	**887 mm**	**887 mm**
Internal clear height	**2028 mm**	**2028 mm**
Internal clear width	**2122 mm**	**2722 mm**
Cavity height (worktop to ceiling)	**1357 mm**	**1357 mm**
Toe / levelling zone	**100 mm**	**100 mm**
Canopy projection, open	**2012 mm**	**2012 mm**
Clear height under canopy	**2128 mm**	**2128 mm**
Packed weight, lift-up (net / gross)	**578 / 633 kg**	**682 / 747 kg**

SERVICES — ALUMINIUM REFERENCE

Drain	**PPR, dia. 50 mm**
Water supply (hot / cold)	**PPR, dia. 20 mm**
Levelling feet	**4 × stainless M16**
Hood exhaust outlet	**R190 mm**
Electrical components	**IP65**
Supply voltage	**110V/60Hz or 220V/50Hz, by market**
Sink / faucet (standard ref.)	**410 × 350 × 200 mm / 360 mm high**

PACKING & SUPPLY — ALUMINIUM LIFT-UP

PRO crate (L × W × H)	**2320 × 900 × 2450 mm**
MAX crate (L × W × H)	**2920 × 980 × 2450 mm**
PRO loading, 40HQ	**10 units**
MAX loading, 40HQ	**8 units**
HS code	**9403200000**
Default Incoterm	**EXW**
Wear-parts kit	**One complimentary kit in each crate**
Certificates	**Component certificates available per project**

The dimensions, packed weights, crate sizes, 40HQ loading, IP65 rating and market voltage above apply only to the aluminium motorized lift-up reference configuration. Stainless-shell units are typically heavier. For stainless-shell units and non-reference sizes, packed weight, crate, 40HQ loading, ingress protection, voltage and open-canopy dimensions are confirmed on the approved order specification. A motorized roller-shutter door is also offered; the packed weights above are for the lift-up configuration. This sheet does not claim whole-system UL, CSA or CE certification. Component certificates and material test reports are available per project against the approved bill of materials. Default term is EXW; other Incoterms require written agreement. Warranty, spares and sample terms: kaisteelkitchen.com.