
TECHNICAL DATA · MOTORIZED LIFT-UP

PRO 2300 / MAX 2900 CUT SHEET

Dual-model reference for dealers and project buyers · 14 November 2026

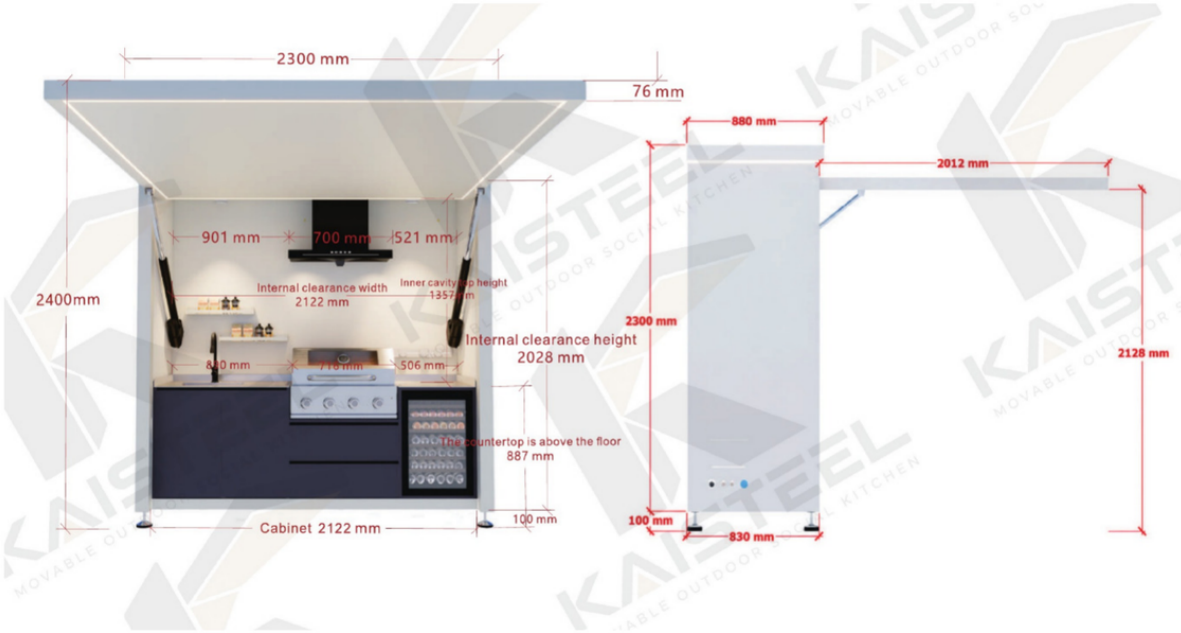

PRO 2300 motorized lift-up, front and side. Overall body 2300 × 880 × 2400 mm. Open canopy projects 2012 mm, with 2128 mm clear height underneath. Dimensions in mm.

KEY DIMENSIONS — PRO 2300

Overall body (W x D x H)	**2300 × 880 × 2400 mm**
Countertop height above floor	**887 mm**
Internal clear height	**2028 mm**
Internal clear width	**2122 mm**
Cavity height (worktop to ceiling)	**1357 mm**
Toe / levelling zone	**100 mm**
Canopy projection, open	**2012 mm**
Clear height under canopy	**2128 mm**

CONSTRUCTION

Frame	**Q235 galvanised square steel, 60 × 60 × 3 mm**
Exterior panel	**Aluminium, 2.0 mm**
Interior lining	**Aluminium honeycomb, 8 mm**
Cabinets	**Aluminium alloy**
Worktop	**SUS304 solid, 6 / 8 / 10 mm (no 5 mm)**
Sink / faucet (standard ref.)	**410 × 350 × 200 mm / 360 mm high**

SERVICES & LEVELLING

Drain	**PPR, dia. 50 mm**
Water supply (hot / cold)	**PPR, dia. 20 mm**
Levelling feet	**4 x stainless M16**
Hood exhaust outlet	**R190 mm**
Electrical components	**IP65**
Supply voltage	**110V/60Hz or 220V/50Hz, by market**
Packed weight, lift-up (net / gross)	**578 / 633 kg**

PRO is also offered with a motorized roller-shutter door; the drawing and packed weights above are for the motorized lift-up configuration. Use the larger overall references for planning, and confirm the installation envelope, appliance interfaces and packing on the approved order drawings. Units ship assembled; site work is positioning, levelling, and water and power connection.

MAX 2900 & PACKING / ELECTRICAL

Same cut-sheet set · PRO 2300 / MAX 2900 · 14 November 2026



MAX 2900 motorized lift-up, 960 mm-deep body, front and side. Overall body 2900 × 960 × 2400 mm. Open canopy projects 2012 mm, with 2128 mm clear height underneath. An 880 mm-deep body is also available.

KEY DIMENSIONS — MAX 2900

Overall body (W x D x H)	**2900 × 960 × 2400 mm**
Countertop height above floor	**887 mm**
Internal clear height	**2028 mm**
Internal clear width	**2722 mm**
Cavity height (worktop to ceiling)	**1357 mm**
Toe / levelling zone	**100 mm**
Canopy projection, open	**2012 mm**
Clear height under canopy	**2128 mm**
Packed weight, lift-up (net / gross)	**682 / 747 kg**

PACKING & LOGISTICS (BOTH MODELS)

PRO crate (L x W x H)	**2320 × 900 × 2450 mm**
MAX crate (L x W x H)	**2920 × 980 × 2450 mm**
PRO loading, 40HQ	**10 units**
MAX loading, 40HQ	**8 units**
HS code	**9403200000**
Default Incoterm	**EXW**

ELECTRICAL & SUPPLY NOTES

Electrical components	**IP65**
Supply voltage	**110V/60Hz or 220V/50Hz, by market**
Drain / water supply	**PPR dia. 50 mm / dia. 20 mm (hot and cold)**
Levelling feet	**4 x stainless M16**
Wear-parts kit	**One complimentary wear-parts kit in each crate**
Certificates	**Component certificates available per project**

This sheet does not claim whole-system UL, CSA or CE certification. Component certificates and material test reports are available per project against the approved bill of materials. 40HQ quantities are for the crate sizes and motorized lift-up configuration above; confirm the packing plan for the approved order. Default term is EXW; other Incoterms require written agreement. Warranty, spares and sample terms: kaisteelkitchen.com.