



(a) Nested STL spec

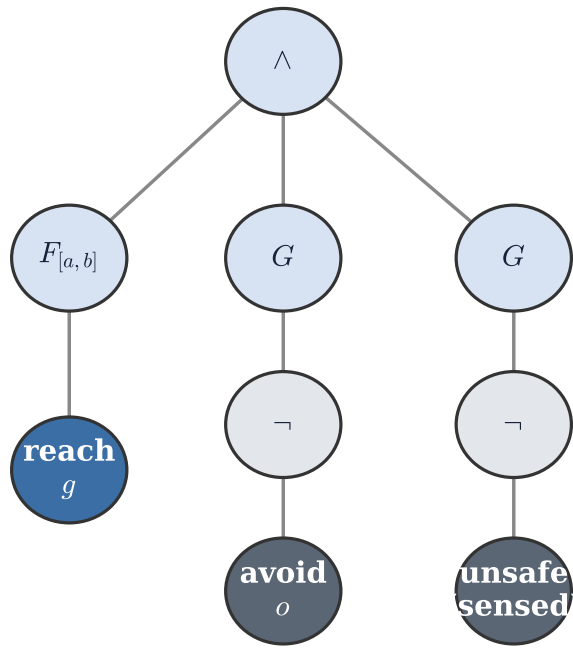

keep-safe = $G \neg$ unsafe, grounded by sensed disks

(b) Frozen flow-matching planner + robustness guidance

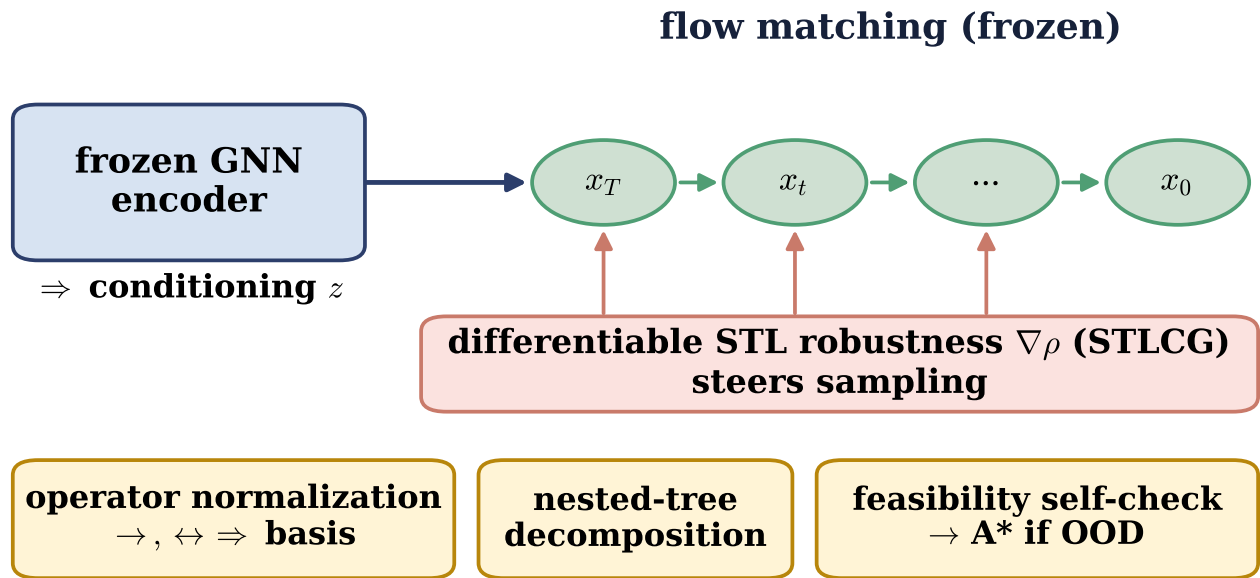

$$\rho(G\varphi) = \min_t \rho(\varphi, t), \quad \rho(F\varphi) = \max_t \rho(\varphi, t), \quad \rho > 0 \Rightarrow \text{satisfied}$$