



C2 Electric Bus Models 2020 to Present

Emergency Response Guide





EMERGENCY RESPONSE GUIDE

Jouley School Bus – C2 Electric Bus: Models 2020 to Present

0. Rescue Sheets

Page 3

1. Identification

Page 5

2. Immobilization / stabilization / lifting

Page 5

3. Disable direct hazards / safety regulations

Page 6

4. Access to the Occupants

Page 7

5. Stored energy / liquids / gases / solids

Page 8

6. In case of fire

Page 8


7. In case of submersion

Page 9

8. Towing / transportation / storage


Page 10

EMERGENCY RESCUE SHEET

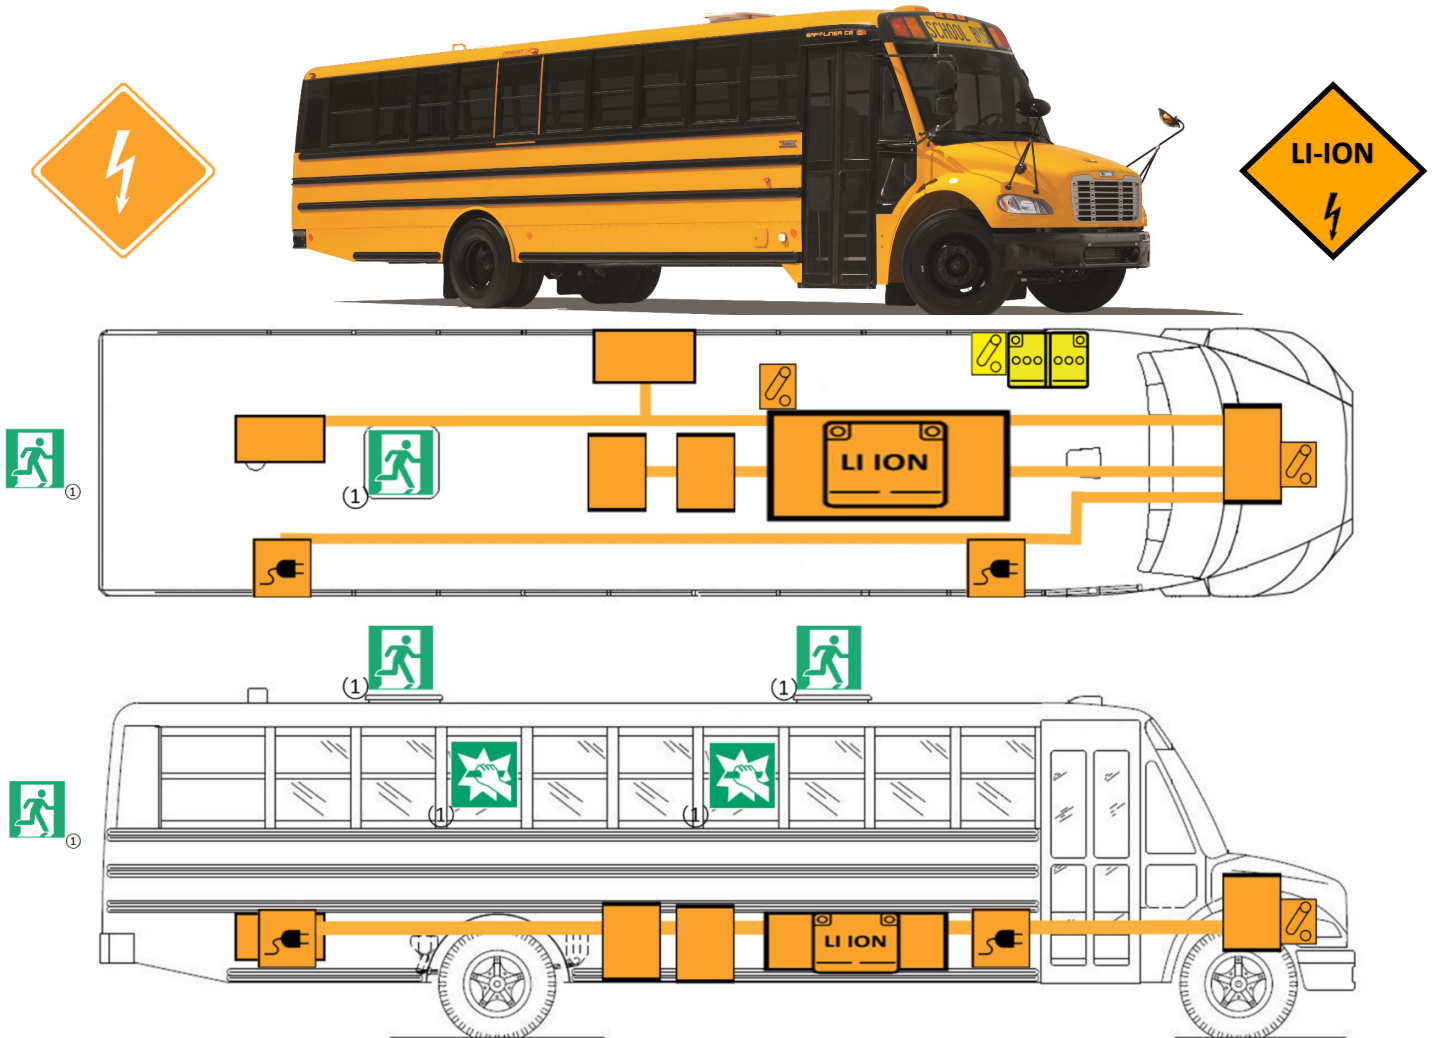

08/27/2025

f548943

				
Electric Propulsion	Charge Port	High Voltage Li-Ion Battery	High Voltage Component	High Voltage Power Cable
				
Low Voltage Battery	Emergency Exit ^①	Break to obtain access	Disconnect High Voltage	Disconnect Low Voltage

① Emergency Exits and Emergency Windows locations will vary based on State Specifications.

⚠ WARNING

If high voltage equipment or high voltage cables (orange sheathing) are damaged due to an accident related to the equipment shown above, there may be a short circuit. Be sure to put on insulated protective gear, such as insulated clothes and gloves, before starting rescue operations.

NEVER CUT HIGH VOLTAGE CABLES (ORANGE SHEATHING)

WARNING

For extrication purposes, the electric bus contains:

1. High-Voltage (HV) components and cabling primarily routed between the frame rails and beneath the floor.
2. Charge ports on the right-hand side and routed below the floor level, which are only energized during charging; and
3. An Air Conditioning compressor on the driver's side of the vehicle, below the floor level.

The HV system can be safely disabled using either the primary shut-off switch located on the left side of the battery or the secondary switch positioned under the hood on the right-hand side, as shown in the diagram. Airbag inflators, pyrotechnic devices, or related components are not expected near the A-pillars or window pillars along the bus. Responders should confirm the exact location of all components before cutting or piercing, as the vehicle may have been altered from its original design.

1. Identification / recognition

The blue Thomas Built Buses logo is located aft of the entrance door and rear surface below drivers side plate recess.

(may be omitted based on state specification)



The blue Thomas Built Buses hood emblem is located forward surface, center in the hood.



*Optional - The blue and yellow Jouley logo can be located aft of the entrance door.



2. Immobilization / stabilization / lifting

1. Apply the Parking Brake.
2. Chock the wheels to immobilize the vehicle.

CAUTION

- To secure the vehicle, you must engage the air parking brake by pulling / lifting the yellow park brake electric switch.




WARNING


The parking brake is controlled by the yellow park brake electric switch. If the Low Voltage (12-volt) system is disabled, the yellow park brake electric switch will also be disabled. To set the park brake without power, the Service Brake pedal must be pumped to reduce air pressure until the parking brake engages.

3. Disable direct hazards / safety regulations


1 Turn off and remove the ignition key.



2 Turn off the low voltage battery disconnect and disconnect all battery ground cables in the battery compartment.

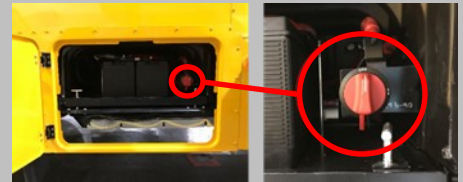

3 Turn off the HV disconnect on the high voltage junction box located under the hood.

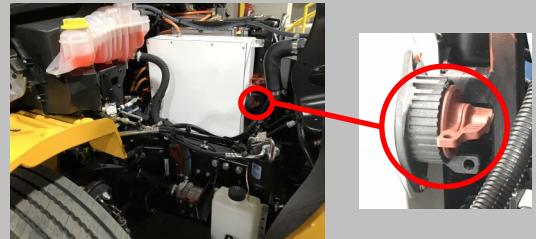

4 Remove manual service disconnects (MSDS) to disconnect the high voltage circuit.



(only performed when wearing High Voltage Arc Flash PPE)


5 Wait five Minutes for the HV components to discharge.



⚠ WARNING

Always wait five (5) minutes after deactivating the high voltage prior to any work on the vehicle. The ensures the systems high voltage is properly dissipated.

4. Access to occupants

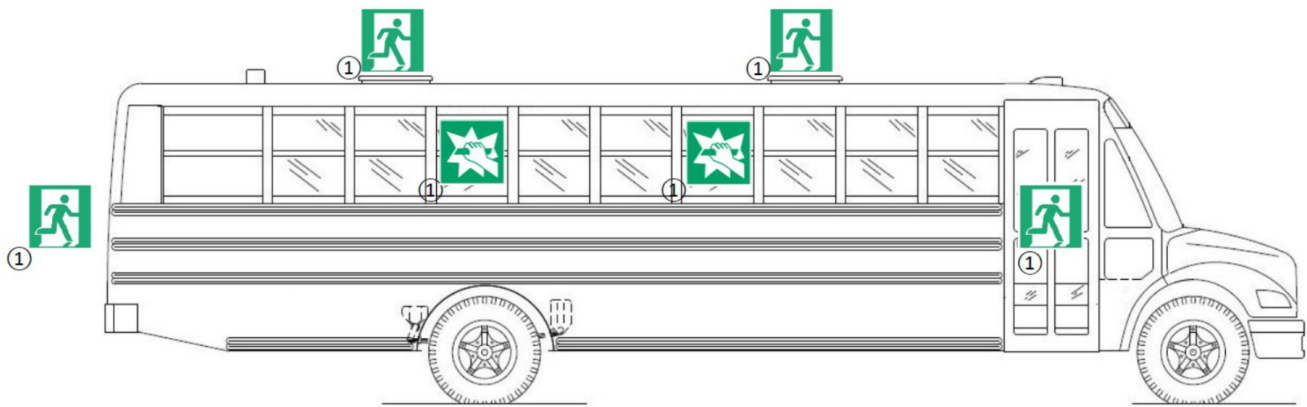

08/27/2025

f750154

① Emergency Exits and Emergency Window locations will vary based on state specifications.


⚠ WARNING

For extrication purposes, the electric bus contains:

1. High-Voltage (HV) components and cabling primarily routed between the frame rails and beneath the floor.
2. Charge ports on the right-hand side and routed below the floor level, which are only energized during charging; and
3. An Air Conditioning compressor on the driver's side of the vehicle, below the floor level.

The HV system can be safely disabled using either the primary shut-off switch located on the left side of the battery or the secondary switch positioned under the hood on the right-hand side, as shown in the diagram. Airbag inflators, pyrotechnic devices, or related components are not expected near the A-pillars or window pillars along the bus. Responders should confirm the exact location of all components before cutting or piercing, as the vehicle may have been altered from its original design.

5. Stored energy / liquids / gases / solids

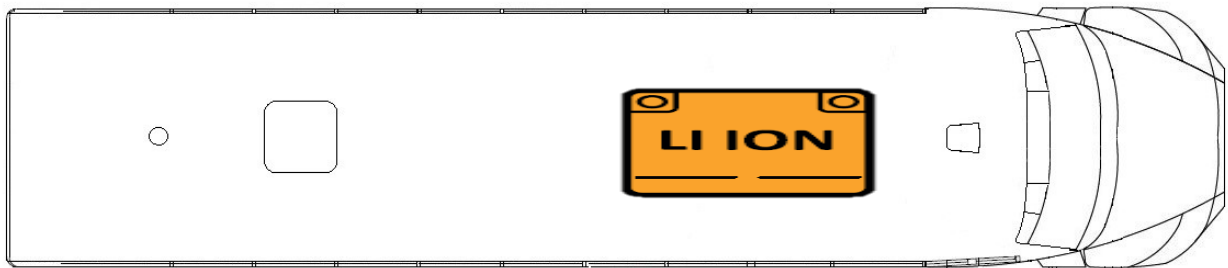

6. In case of fire

Lithium-ion batteries contain liquid, flammable electrolyte.

Burning batteries can also ignite other batteries in the vicinity.

The extinguishing agent must be applied continuously until the battery is fully cooled down; otherwise, there is a risk of re-ignition.

- A burning lithium-ion battery generally cannot be extinguished directly. Water can be used as an extinguishing agent for cooling lithium-ion batteries.
- A battery fire may continue to burn for several hours or re-ignite, so it is recommended to cool the battery continuously with excessive amounts of water.
- The temperature of the battery can be monitored with a thermal imaging camera to ensure it is not heating up.
- Re-check the temperature of the battery once an hour to ensure it is not increasing. If the temperature rises, continue to cool the battery with water.

Do not store a vehicle containing a damaged or burning lithium-ion battery within 15 feet of any structure or other vehicles.

⚠️ WARNING

Always wear appropriate PPE when fighting vehicle fires.

For fighting vehicle fires with lithium-ion batteries, use PPE at least as protective as used when fighting conventional vehicle fires, including but not limited to SCBA and full-body protective clothing.



7. In case of submersion

⚠️ DANGER

Handling a submerged vehicle without appropriate training and personal protective equipment (PPE) can result in serious injury or death.

A submerged vehicle should be handled by emergency personnel while wearing the appropriate PPE.

⚠️ WARNING

Removal of a submerged service disconnect can result in an electrical short and potential fire leading to serious injury or death.

Submersion in water (especially salt water) can damage low and high voltage components. Although not a common occurrence, this could result in an electrical short and potential fire once the vehicle is no longer submerged.

⚠️ WARNING

Damaged high voltage batteries can produce flammable gas and potential fire leading to serious injury or death.

Ventilate the passenger compartment once the vehicle is out of the water. Do not store the vehicle indoors.

Avoid contact with a submerged high-voltage system and battery to minimize risk. The high-voltage system of the Jouley is isolated from the chassis. When undamaged, the system will not energize the surrounding water, even when fully submerged. Emergency personnel will check for damage and will disable the high-voltage system after removing the vehicle from the water.

8. Towing / transportation / storage

Towing (Front Hookup Only)

WARNING

Be careful of electric shock caused by current flowing to the vehicle if high voltage equipment or cables are damaged.

DANGER

Do not tow an unbraked vehicle if the combined weight of both vehicles exceeds the sum of the gross axle weight ratings (GAWR) of the towing vehicle. Otherwise, the brake capacity will be inadequate, which could result in personal injury or death.

IMPORTANT

- When it is necessary to tow the vehicle, ensure that the following instructions are closely followed to prevent damage to the vehicle.
- When towing or pushing the vehicle, regardless of the distance or speed traveled, either disconnect the driveshaft at the rear axle and support it as necessary, or remove the axle shafts. Failure to do this when towing the vehicle with the rear wheels on the ground could result in damage to the transmission and other parts.
- The vehicle should never be towed from the rear. The gross axle weight rating (GAWR) of the front axle may not be sufficient to support the increased load when towing from the rear, which could damage the front axle.
- Towing rules and regulations vary by federal, state, local, and transit authority. These laws must be followed when towing the bus.

1. Disconnect the battery ground cables.
2. Remove both the drive axle shafts.
3. Cover the ends of the hubs with metal plates or plywood cut to fit the axle opening, and drilled to fit the axle shaft studs. This prevents lubricant from leaking out and keeps contaminants from getting in, which could damage the wheel bearings and axle lubricant.

NOTICE - Failure to protect the frame rails from the chains could cause damage, leading to eventual frame failure.

4. Remove the bumper.
5. Attach the towing device. Due to the many variables that exist in towing, positioning the lifting and towing device is the sole responsibility of the towing-vehicle operator.
6. Lift the vehicle and secure the safety chains. If extra towing clearance is needed, remove the front wheels.
7. Connect the clearance lights, taillights, and signal lights. Connect any special towing lights required by local regulations.

WARNING

Failure to chock the tires or connect the tow truck's air brake system before releasing the spring parking brakes could allow the disabled vehicle to suddenly roll. This could cause property damage or personal injury.

8. Chock the tires on the disabled vehicle and connect the towing vehicle's air brake system to the vehicle being towed. Then, release the spring parking brake and remove the chocks.

Storage of Damaged Battery

1. If the lithium-ion battery has been damaged, it is possible that the battery can increase in temperature and lead to a fire. Use a thermal imaging camera to ensure that the battery is not increasing in temperature or exceeding 60°C. If necessary, initiate cooling with water.
2. Before handling the damaged battery, ensure there is no smoke or signs of heat. If, after observing the battery pack, there are no signs of heat and the high-voltage system has been disabled, the battery may be moved to a safe location.
3. Ensure that the damaged battery or vehicle with a damaged battery has a 15-foot buffer area around it, away from buildings or materials.