





An Oshkosh Corporation Business

Pierce® Volterra™ Electric Fire Truck 2023 to Present



Optional Crew Cab
Seat Locations

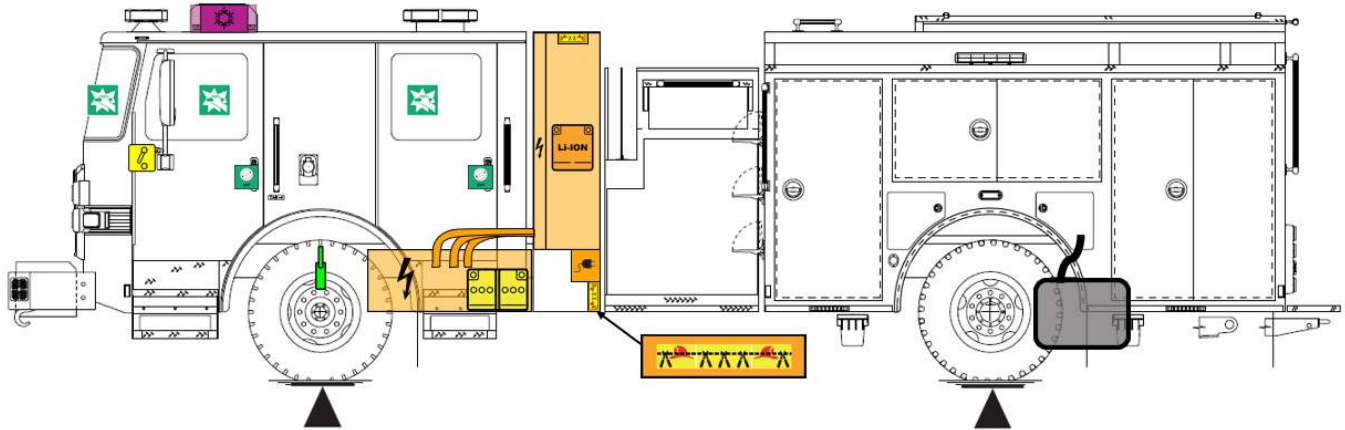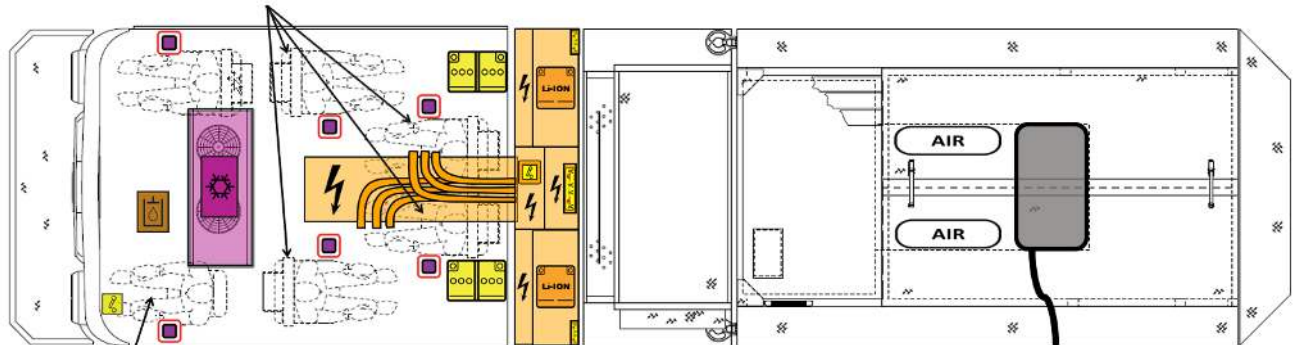

	Hybrid Electric Propulsion		High Voltage Battery 700V LI ION		Low Voltage Battery 12V		High Voltage Disconnect		Low Voltage Disconnect		High Voltage Disconnect Cut Loop
	High Voltage Component		High Voltage Power Cable		High Voltage Charging Inlet		Gas Strut/Preloaded Spring		Air-conditioning component		Hydraulic Fluid Reservoir
	Diesel Fuel Tank		Compressed Air Tank		Lifting Points		Entry/Exit Points		Break Points		Seat Belt Pretensioner
	Seat Height Adjustment		Seat Longitudinal Adjustment		Steering Wheel Tilt Control	Note: These images show information for one variant of this product. The Cab, Pump House and Rear Body configuration can vary depending on the variant of the product.					



Oshkosh Corporation
1917 Four Wheel Drive
Oshkosh, WI 54902

Document ID

SOP 96-2276

Revision

Version 1

Revision Date


2025 Dec 19

Page


1 of 5

1. Identification / Recognition

CAB SIDES

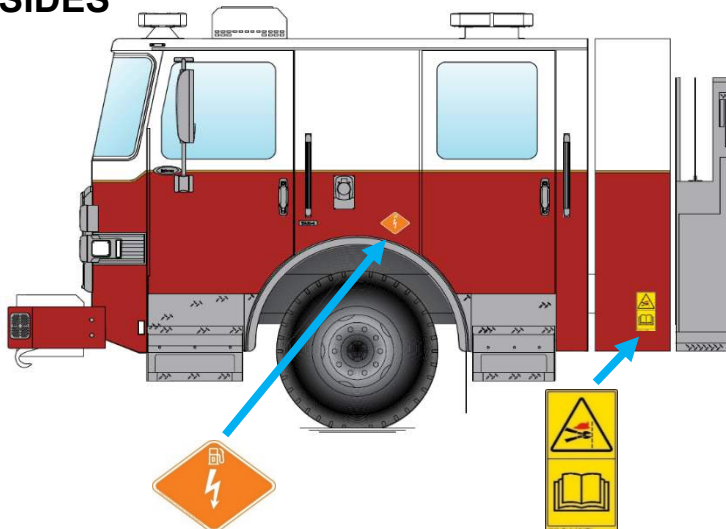

REAR OF TRUCK

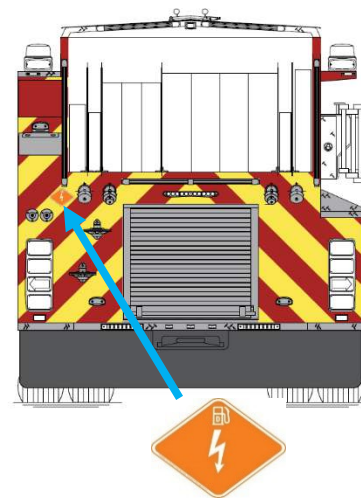

2. Immobilization / Stabilization / Lifting




WARNING: Vehicle noise may be reduced in some operation modes. Failure to shutdown vehicle before immobilization may result in death, severe injury, or property damage.




WARNING: Unintended Movement Hazard. Failure to follow shutdown procedures could result in unintended vehicle movement. Always approach the vehicle from the sides to stay out of the potential travel path and properly chock the wheels. Reduced vehicle noise may make it difficult to determine if the truck is energized. Failure to comply may result in serious personal injury or death.




WARNING: Lifting Hazard. Do not use high voltage battery or any high voltage components to lift or stabilize vehicle. Use only designated lifting points. Failure to comply may result in serious personal injury or death.

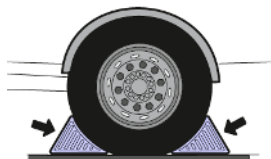

Front Axle Lifting Location:




Rear View

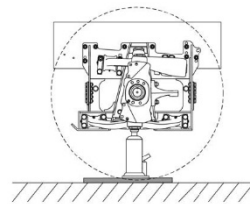


Side View

- Apply park brake (pull to apply)
- Chock wheels to prevent vehicle movement

Rear Axle Lifting Location:



Rear View



Side View



Oshkosh Corporation
1917 Four Wheel Drive
Oshkosh, WI 54902

Document ID

SOP 96-2276

Revision

Version 1

Revision Date

2025 Dec 19

Page

2 of 5

3. Disable Direct Hazards / Safety Regulations

ELECTRIC VEHICLE DRIVETRAIN

IN THE EVENT OF AN EMERGENCY THE DRIVELINE POWER CAN BE DISCONNECTED BY BREAKING/SEVERING CUT LOOPS LOCATED IN ONE OF THREE LOCATIONS



Remove High Voltage Disconnect Cut Loop
in 3 possible places

If Charging

- Press E-STOP on charger (if equipped) or hold green button on vehicle.
- Wait for green light to extinguish, then unplug charger from inlet.


If Charge Inlet is Locked

- Flip off vehicle low voltage disconnect switch in cab
- Mechanically unlock charging inlet if necessary


4. Access to the Vehicle's Occupants



Break these windows to obtain access

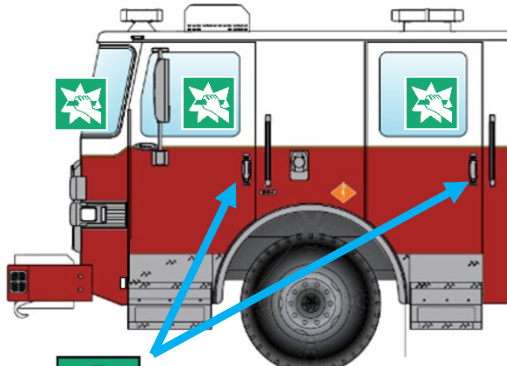

Exterior Door Handles

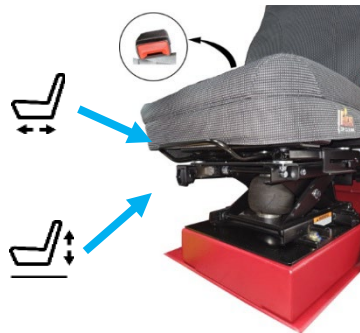

5. Stored Energy / Liquids / Solids

700 V LI-ION	
12V Lead Acid	
R134A Refrigerant	



Oshkosh Corporation
1917 Four Wheel Drive
Oshkosh, WI 54902

Document ID

SOP 96-2276

Revision

Version 1

Revision Date

2025 Dec 19

Page

3 of 5

 Diesel Fuel	    
 ISO 32 Hydraulic Oil	  
50-50 Ethelene Glycol Coolant	 
TES 668 Engine/Transmission Oil	  

6. In Case of Fire



WARNING: Fire Hazard. Battery re-ignition is possible, therefore continuous monitoring is critical



WARNING: Inhalation Hazard. Responders should always protect themselves with PPE, including a Self-Contained Breathing Apparatus (SCBA). Furthermore, take appropriate measures to protect civilians downwind from the incident.



HV battery fires require large volumes of water for cooling and suppression. Standard extinguishers or water streams can be used on the vehicle body, but the battery packs always requires water only.

7. In Case of Submersion



WARNING: Fire Hazard. Flooded battery can still have stored energy and catch on fire. Failure to comply may result in serious personal injury or death.



WARNING: Battery Failure Hazard. Visible bubbling or fizzing from a submerged or damaged electrical vehicle may indicate high-voltage battery failure or an active electrical discharge. Keep your distance until the reaction has stopped. Failure to comply may result in serious personal injury or death.




WARNING: Electrical Shock Hazard. Always treat the high voltage components as fully charged and energized. Wear proper PPE when working on vehicle. A flooded vehicle plugged into a charging station can pose an electrocution hazard. Failure to comply may result in serious personal injury or death.

A flooded or submerged vehicle does not pose a direct electrical risk to the occupant or surrounding area for extraction. If possible, remove the vehicle from the water and continue with the disable procedure for this vehicle (Section 3. Disable Direct Hazards / Safety Regulations).

	Oshkosh Corporation 1917 Four Wheel Drive Oshkosh, WI 54902	Document ID	Revision	Revision Date	Page
		SOP 96-2276	Version 1	2025 Dec 19	4 of 5


8. Towing / Transportation / Storage

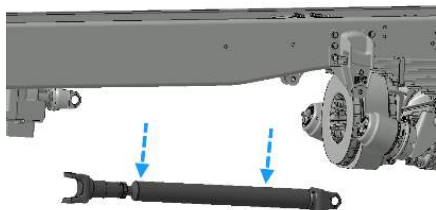

Do not tow the vehicle until the rearmost driveshaft has been removed as this may cause the vehicle to generate electricity.



Check with thermal imaging to ensure there are no hotspots before storing

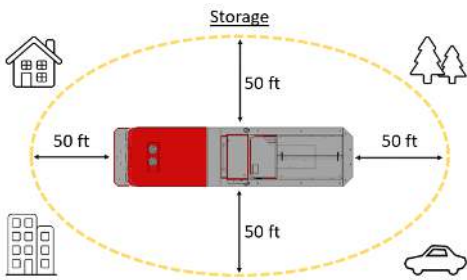

Keep damaged vehicles away from surrounding vehicles, structures, and combustible items.