




	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
			Gas strut / Preloaded spring		High strength zone				
	Battery low voltage				Fuel tank				
	High-voltage battery		High-voltage power cable		Low voltage device that disconnects high voltage		Fuse box disabling high voltage		
	Air tank		Fuel tank content gasoline/ethanol		High voltage component				

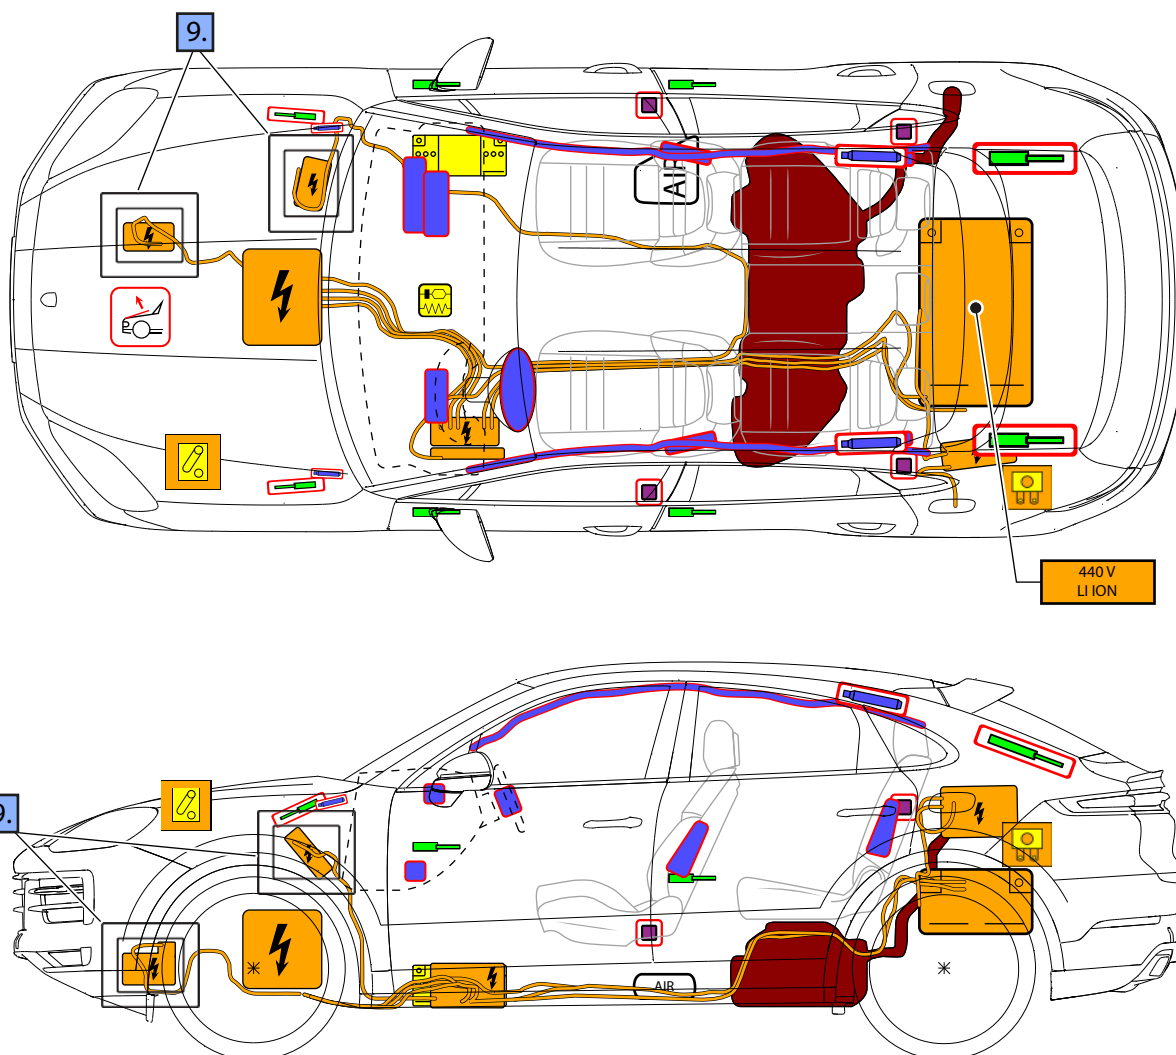


PORSCHE

Porsche AG, Cayenne E-Hybrid Coupé (9YB) All derivatives SUV, as from model year 2023

1. Identification / recognition



The lack of engine noise does not mean that the vehicle is turned off.
Restart is possible until the vehicle is decommissioned.

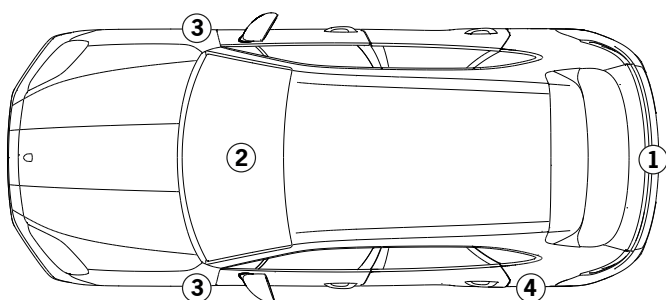

Equipment-dependent



Equipment-dependent



Equipment-dependent




2. Immobilization / stabilisation / lifting

Immobilizing the vehicle

Actuate electric parking brake



Lifting points


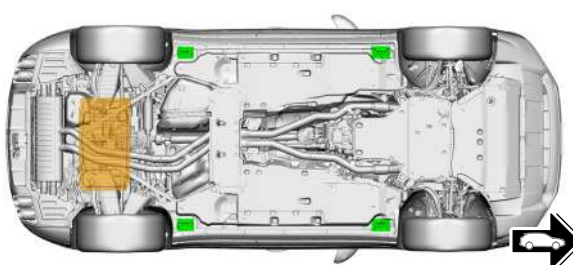


Suitable lifting points

High-voltage battery

Switching off ignition


Press "Start-Stop" button on the instrument panel

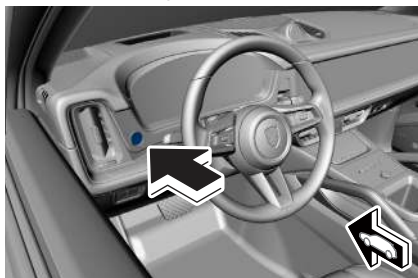


3. Disable direct hazards / safety regulations

The high-voltage system is automatically disabled in the event of accidents in which the airbag is triggered. The high-voltage system is deenergised approx. 20 seconds after the disabling.

Disabling high-voltage system



Option 1: from the engine compartment

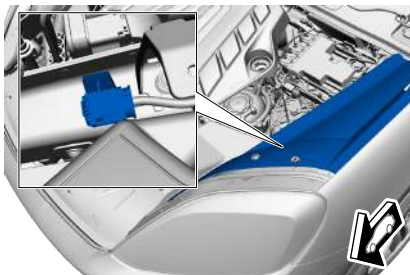





PORSCHE

Porsche AG, Cayenne E-Hybrid Coupé (9YB) All derivatives SUV, as from model year 2023



Option 2: from the vehicle rear

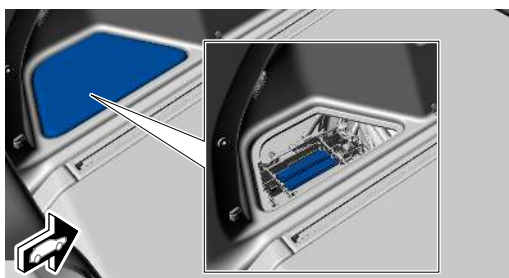

Do not touch, cut or open high-voltage components and high-voltage battery!
Wear appropriate protective equipment!

Disconnecting 12-volt battery



From the front passenger seat




Disconnect the negative terminal of the battery



Disconnecting from charging station (emergency release)

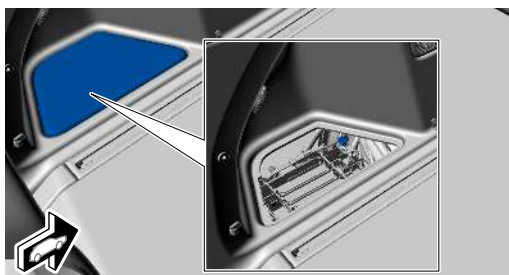

4. Access to the occupants

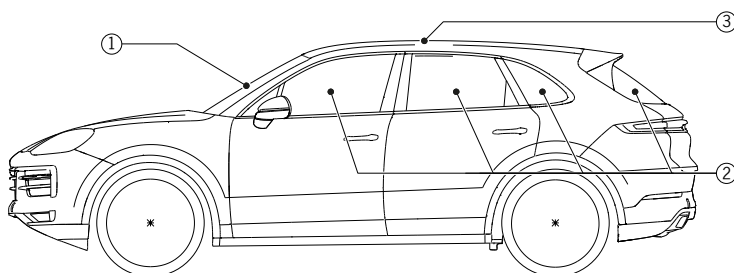


Glass types

- ① Laminated safety glass
- ② Equipment-dependent: Single-pane safety glass or laminated safety glass
- ③ Equipment-dependent: Single-pane safety glass

5. Stored energy / liquids / gases / solids



Gasoline
max. 75 l



LI ION
400 V




PORSCHE

Porsche AG, Cayenne E-Hybrid Coupé (9YB)

All derivatives

SUV, as from model year 2023



12 V



Roof (equipment-dependent)



If coolant is leaking from the battery cooling system, there is the risk of a thermal reaction in the high-voltage battery.
Monitor high-voltage battery temperature.



6. In case of fire



Lithium-ion batteries may self-ignite or re-ignite after the fire has been extinguished!
Wear appropriate protective equipment!



7. In case of submersion

After recovering the vehicle from the water, disable the high-voltage system (see section 3) and allow the water to drain. Wear appropriate protective equipment!

8. Towing / transportation / storage



Do not tow a vehicle involved in an accident on its drive axles.



9. Important additional information

The position of the electric interior heater in the left hand drive variant is shown as an example. The position is mirrored on the left side of the engine in right hand drive variants.



Depending on the equipment, the position of the electric A/C compressor may be mirrored on the left side of the engine.

You can find further information on assistance in the event of an accident and recovery of vehicles at:

<https://www.vda.de/de/themen/automobilindustrie/standards-und-normung/retten-und-bergen>

10. Explanation of pictograms used

Hybrid Electric Vehicle on fuel of liquid group 2	General warning sign	Warning, Electricity	Flammable	Explosive	Corrosives	Hazardous to the human health	Environmental hazard
Bonnet	Boot	Remove smart key	Use thermal Infrared camera	Dangerous voltage	Use water to extinguish the fire	Carbon structure	